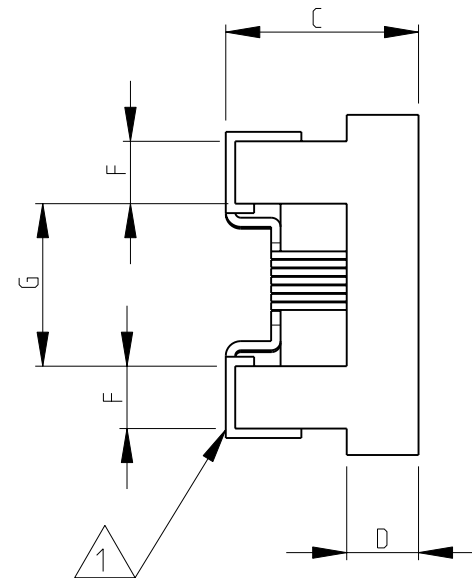




- 1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS
- 2 AVAILABLE IN 2 DIFFERENT SERIES
- 3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR



RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASH.M	14-NOV-08		<div>TE Connectivity</div>					
		CHK PRAKASH.S	14-NOV-08							
DIMENSIONS: mm		APVD STEPHEN.P	14-NOV-08		NAME LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650					
		PRODUCT SPEC -								
		APPLICATION SPEC -		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL -		FINISH -		WEIGHT -		A 3		00779	C= 1624112	-
CUSTOMER DRAWING						SCALE 20:1		SHEET 1 OF 1		REV BA1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-1624112-8](#)