

Protective hose - WR/Pg16-50M - 1666841


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective hose, for protective house screw connection, packing volume: 50 m, Pg16



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 136888
GTIN	4017918136888

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 110 °C
---------------------------------	-------------------

General

Pg screw connection	Pg16
Material	PA
Flammability rating according to UL 94	HB
Color	gray
Bending radius, static	45.00 mm


Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Drawings

Protective hose - WR/PG16-50M - 1666841

Dimensional drawing

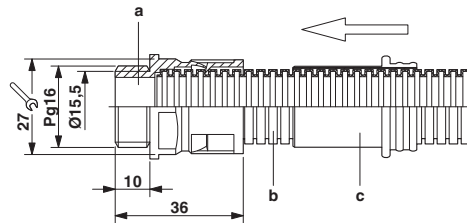

Assembly instructions for Pg16 corrugated pipe

a = Corrugated screw connection

B = Corrugated pipe

c = Opener

Installation note:

Cut the corrugated pipe in the groove to retain a round shape for insertion. The lighter seal (not depicted in the illustration) is positioned in the corrugated pipe screw connection below the safety latch. The darker outer seal (not depicted in the illustration) is placed over the corrugated pipe screw connection from outside. The corrugated pipe is then pushed as far as possible into the corrugated pipe screw connection and clicks into place. The screw connection is opened by placing the yellow corrugated pipe opener with force between the safety latch and the corrugated tube and the corrugated pipe is then pulled out.

Phoenix Contact 2018 © - all rights reserved

<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstr. 8

32825 Blomberg

Germany

Tel. +49 5235 300

Fax +49 5235 3 41200

<http://www.phoenixcontact.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1666841](#)