

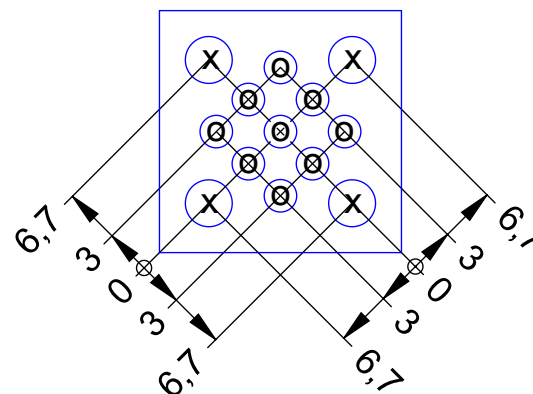
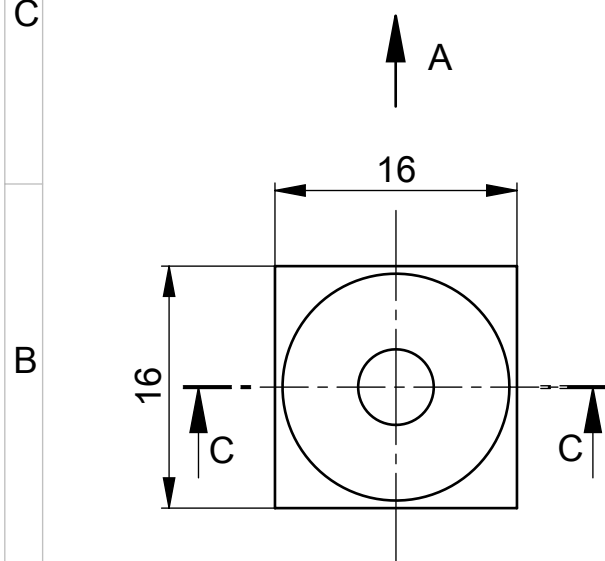


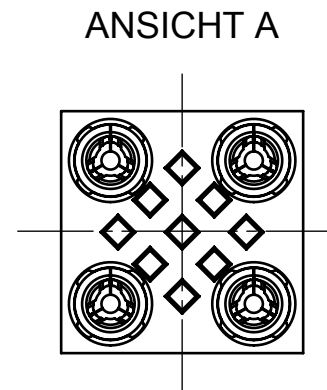
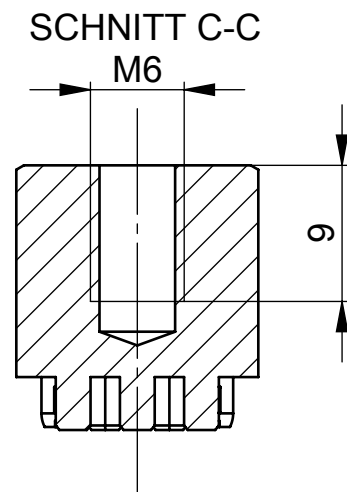


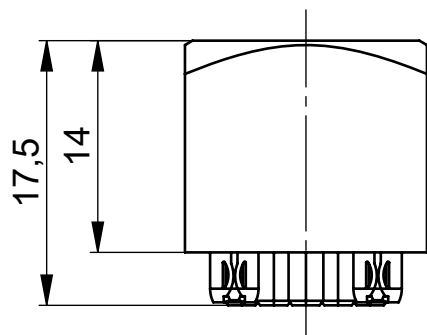

Lochspezifikation:

O
Bohrdurchmesser: $\varnothing 2,30^{+0,00}_{-0,03}$
Enddurchmesser chem. Zinn: $\varnothing 2,175^{+0,05}_{-0,05}$
(Cu: min. 30µm - max. 60µm)
Enddurchmesser HAL bleifrei: $\varnothing 2,15^{+0,05}_{-0,05}$
(Cu: min. 25µm, Sn: max. 15µm)

X
Bohrdurchmesser: $\varnothing 3,20^{+0,00}_{-0,03}$
Enddurchmesser: $\varnothing 3,10^{+0,04}_{-0,06}$

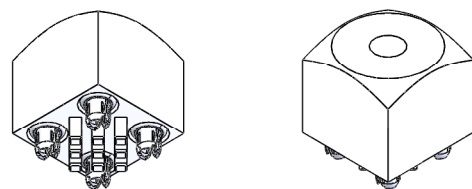

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Material / Surface				Tolerances				Scale	2:1	Original drawing
						Drawing Number			225415	
					Date	Name	Designation ERNI BCS Powerelement Buchse M6			
				Drawn	15.03.12	M.Tolj				
				Checked	15.03.12	T.Engel				
				Approved						
						Electronics GmbH BLUEcontact Solutions		Customer Part Number		
		D-73099 ADELBERG								
A	Neuerstellung	15.03.12	M.Tolj					A4		
Index	Modification Nr.	Date	Name							

1080200002

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[225415](#)