



TL1014 SERIES TACT SWITCH


APPLICATIONS / MARKETS



Audio / Visual



Computer Peripherals



Consumer Electronics



Instrumentation



Telecommunication



Medical Equipment

RoHS

SPECIFICATIONS

Electrical Rating: 50mA @ 12VDC

Life Expectancy:

160 gf: 200,000 cycles

220 gf: 100,000 cycles

Contact Resistance: 100mΩ Max. Initial

Insulation Resistance: 100 MΩ Min. at 500V

Dielectric Strength: 250VAC for 1 min.

Operating/Storage Temperature: -40°C to 85°C

Operating Force: 160 gf, 220 gf

Travel:

160 gf: 0.25mm

220 gf: 0.30mm

Contact Arrangement: SPST

FEATURES & BENEFITS

- Tape & Reel packaging
- Multiple operating forces
- Surface mount termination
- Right angle design
- Subminiature in size

PART NUMBER CONFIGURATOR

Series	Boss	Actuation Force	Contact Plating	Termination
TL 1 0 1 4	A	F 1 6 0	Q	G
TL1014	A - No boss B - Boss	F160 - 160 gf F220 - 220 gf	Q - Silver	G - Gullwing

Specifications subject to change without notice



E-SWITCH®

www.e-switch.com




800.867.2717

2




TL1014 SERIES TACT SWITCH

BODY DIMENSIONS

A - No Boss

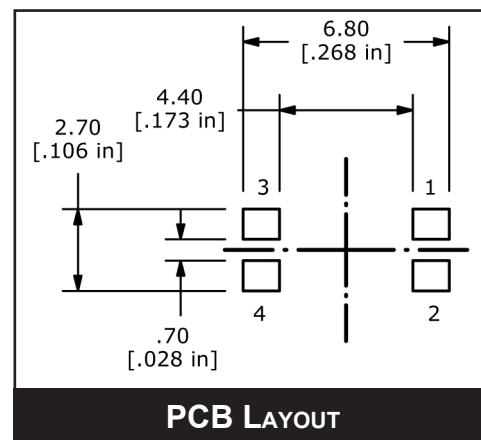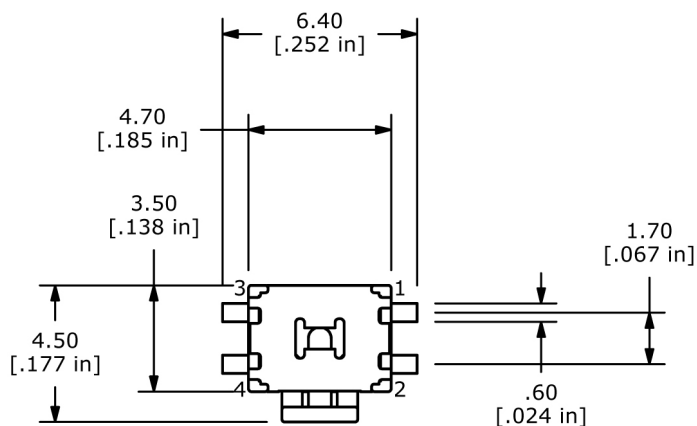

B - With Boss

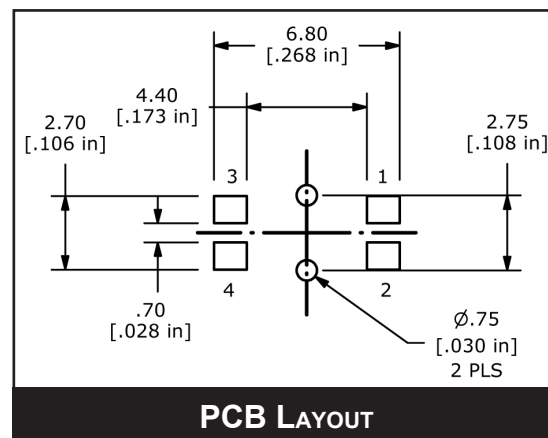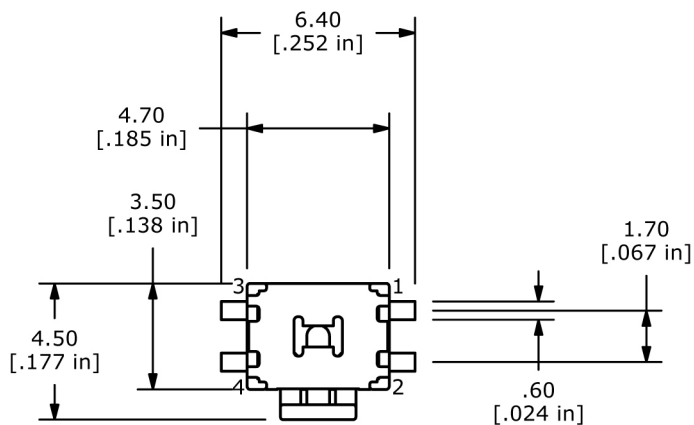

E-SWITCH®

www.e-switch.com

800.867.2717

3

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[TL1014AF220QG](#) [TL1014BF220QG](#)