



Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

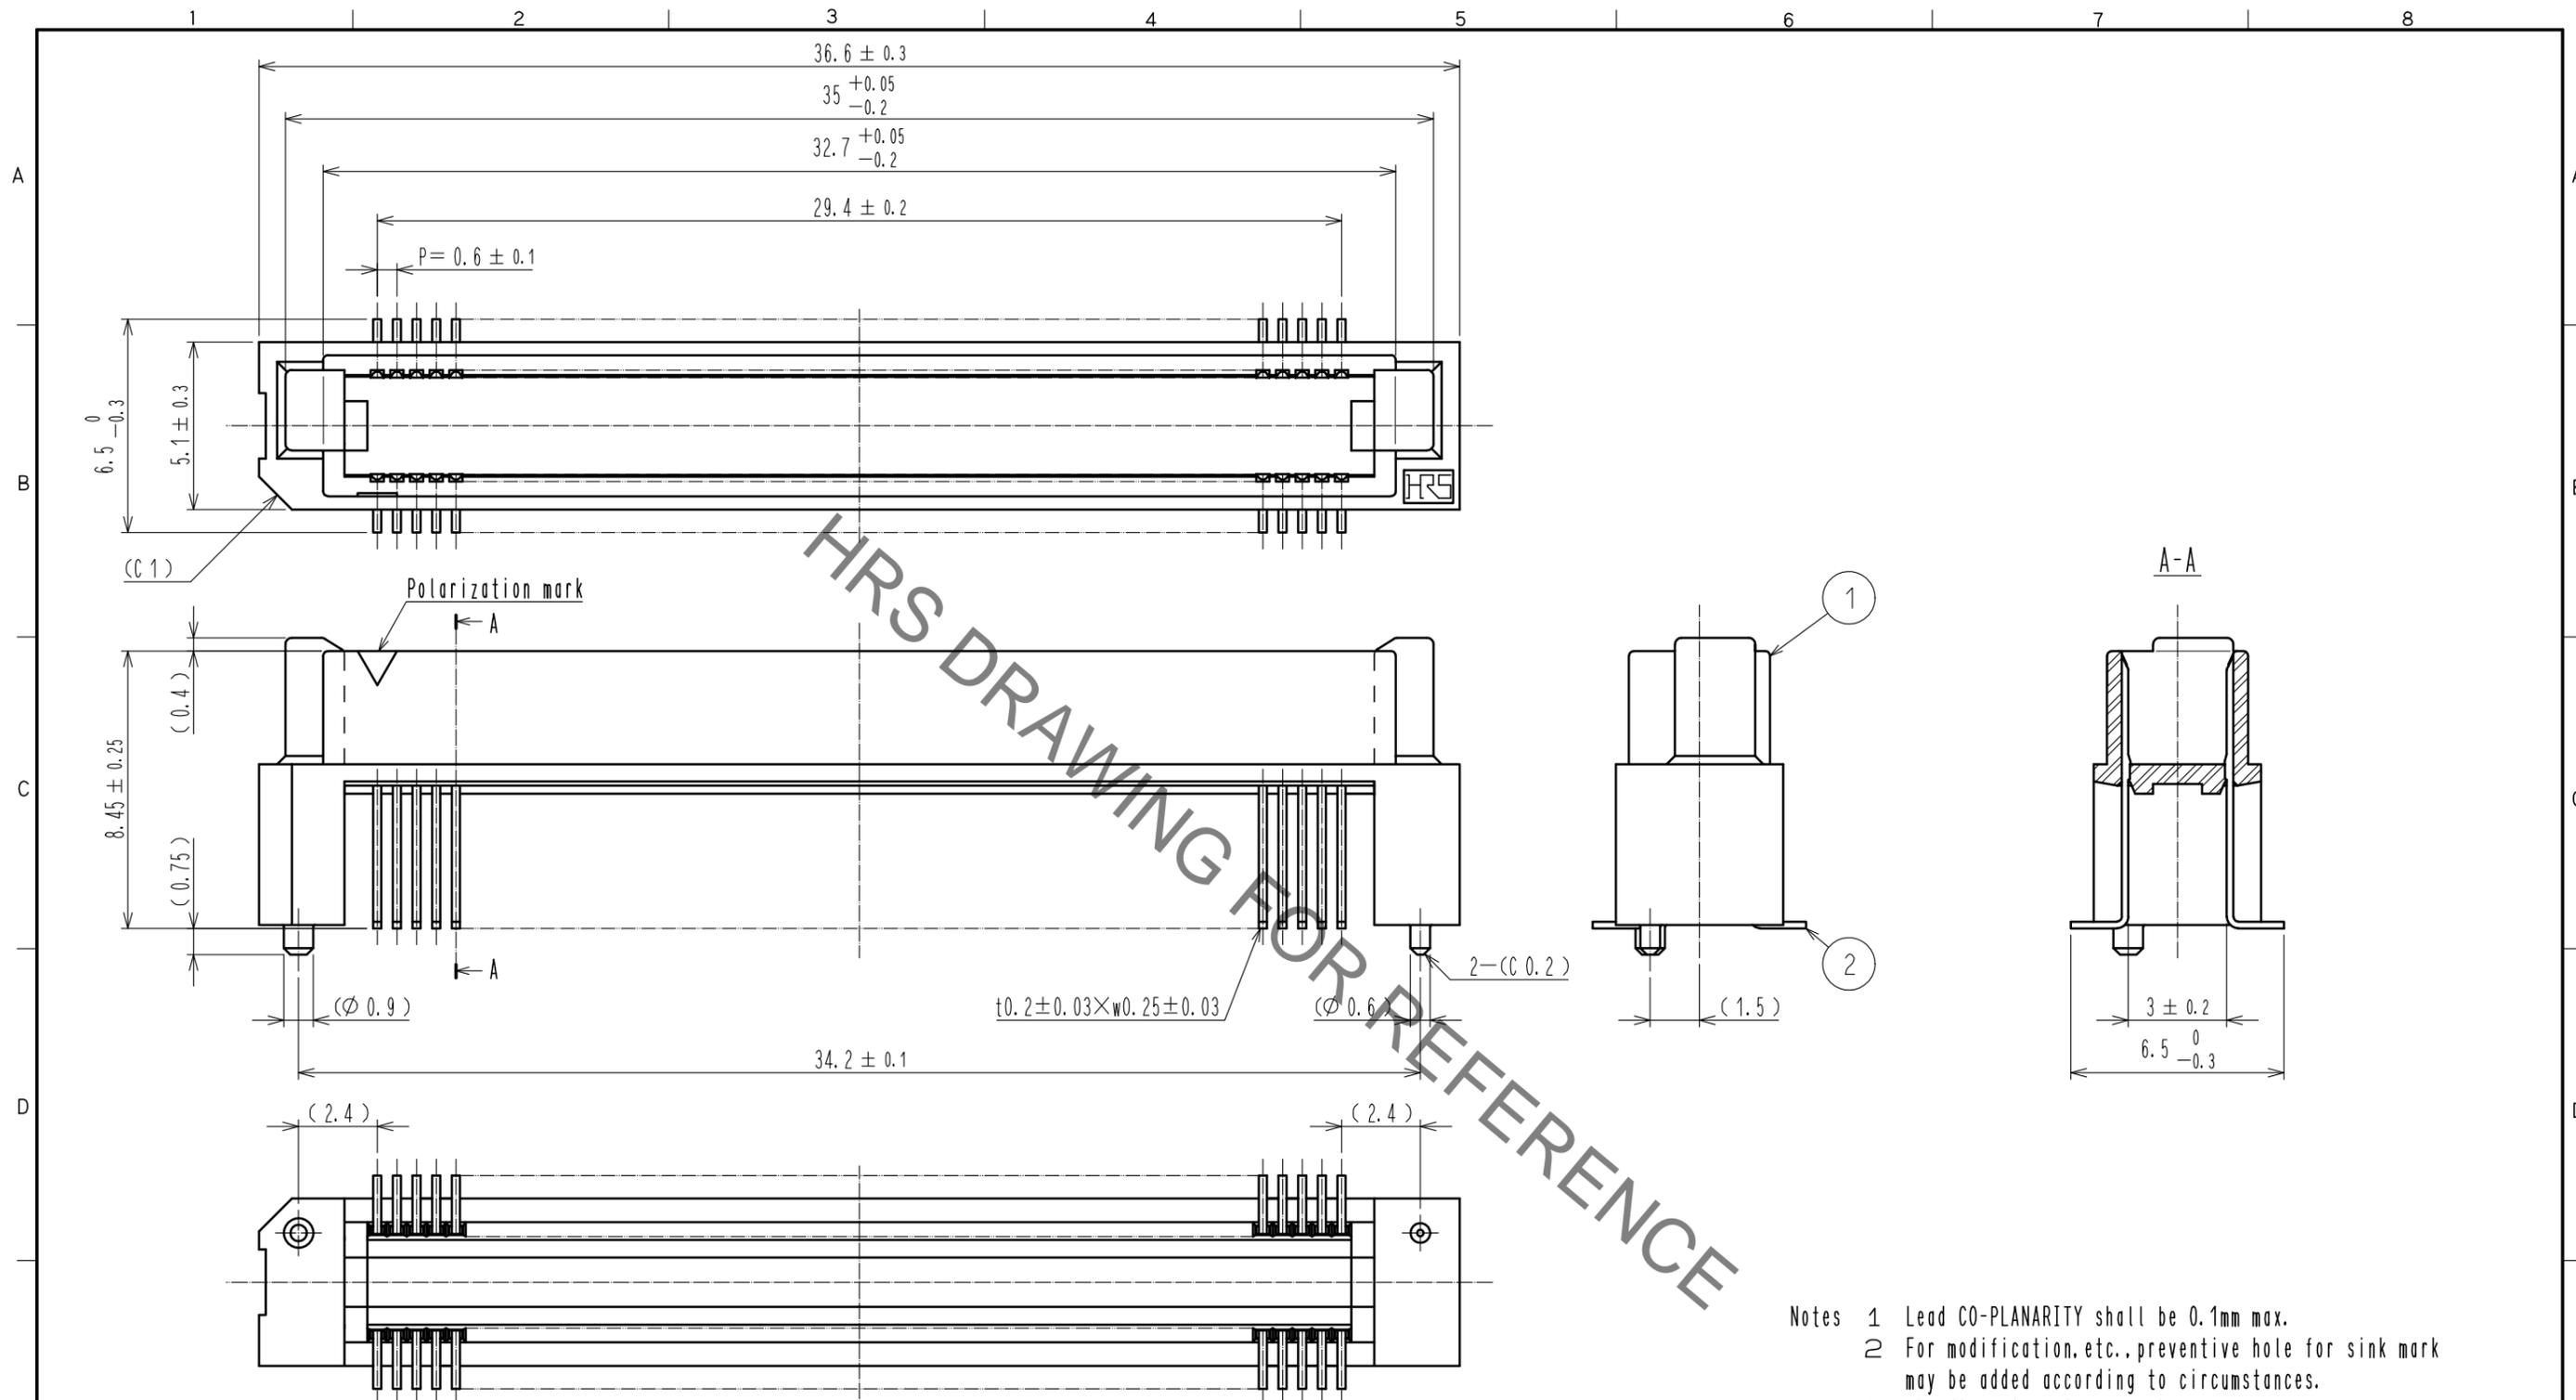

Recommended land pattern dimension of PCB (mounting side) (2:1)

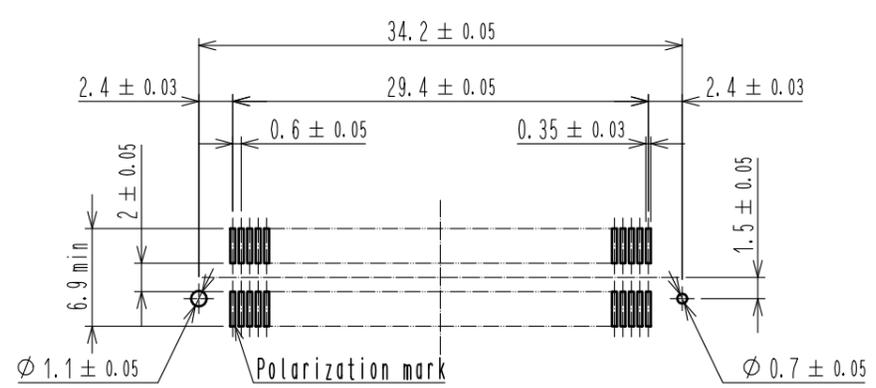

- Notes
- 1 Lead CO-PLANARITY shall be 0.1mm max.
 - 2 For modification, etc., preventive hole for sink mark may be added according to circumstances.
 - 3 The dimensions in parentheses are for reference.

1	PPS	Light brown (UL94V-0)	2	PHOSPHOR BRONZE	Contact area : Gold 0.1μm min. Lead area : Tin-plating 1μm min. Under plating : Nickel 1μm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00006416	DESIGNED KS. NAKAJIMA
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	20051121	DRAWING NO. EDC-150863-71-25	CHECKED HT. YAMAGUCHI
		CHECKED : HS. OZAWA	20051121	PART NO. FX8C-100P-SV4(71)	DATE 20200803
		DESIGNED : KY. NAKAMURA	20051118	CODE NO. CL578-0585-9-71	
		DRAWN : KY. NAKAMURA	20051118		


Added precaution

Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


【 Precaution 】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

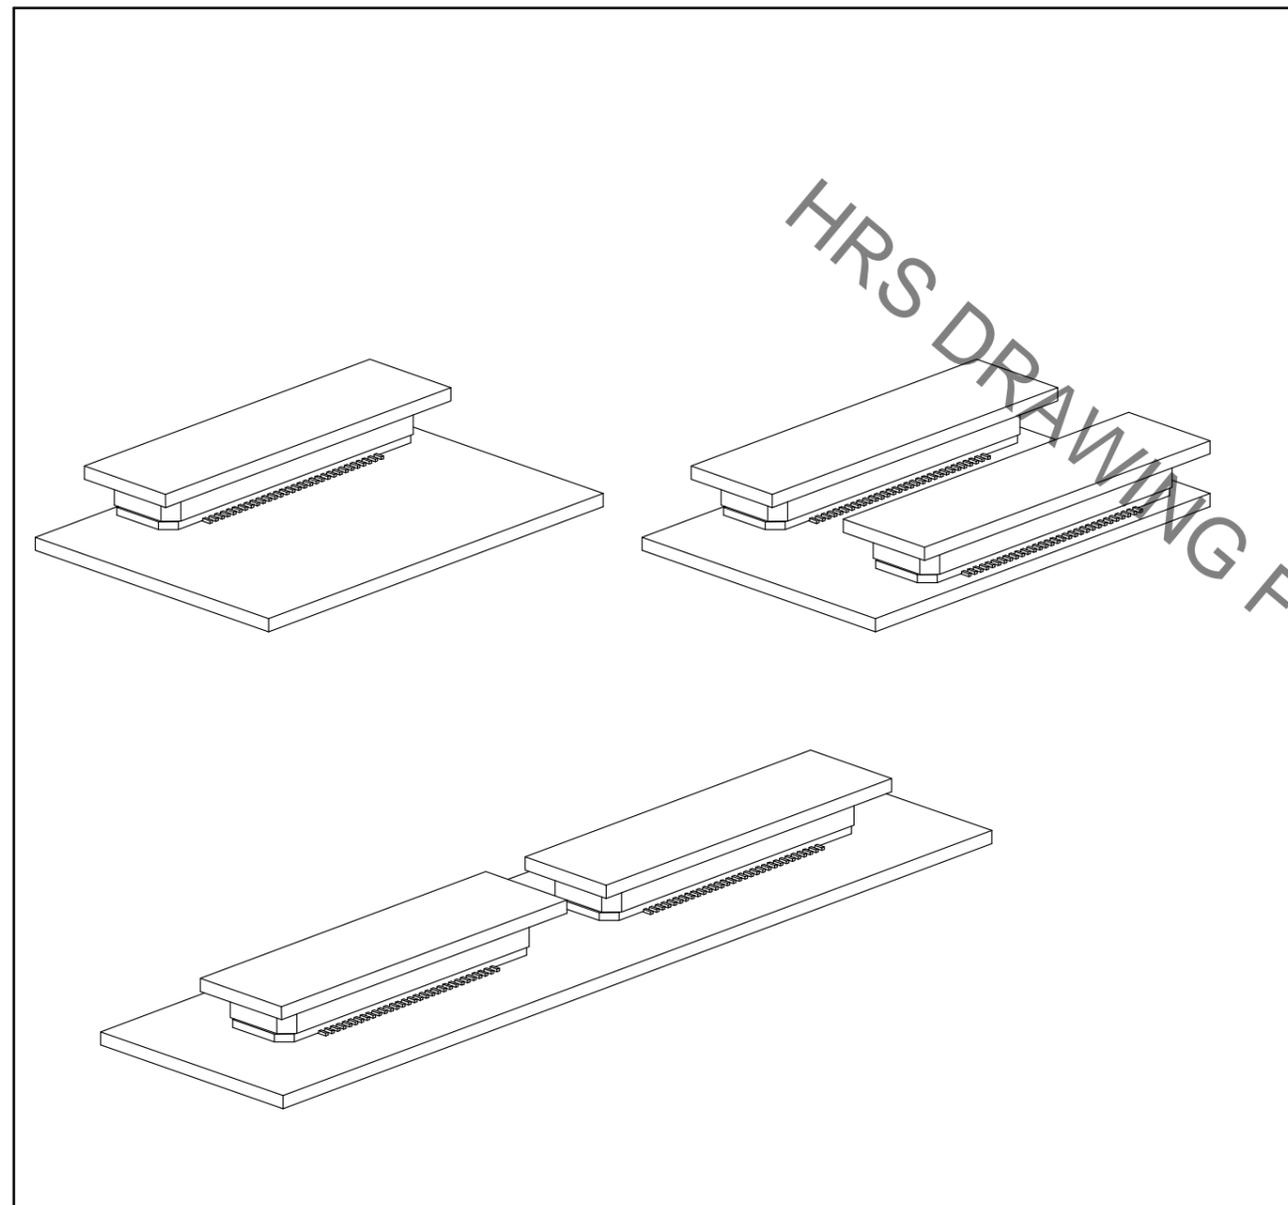

NG

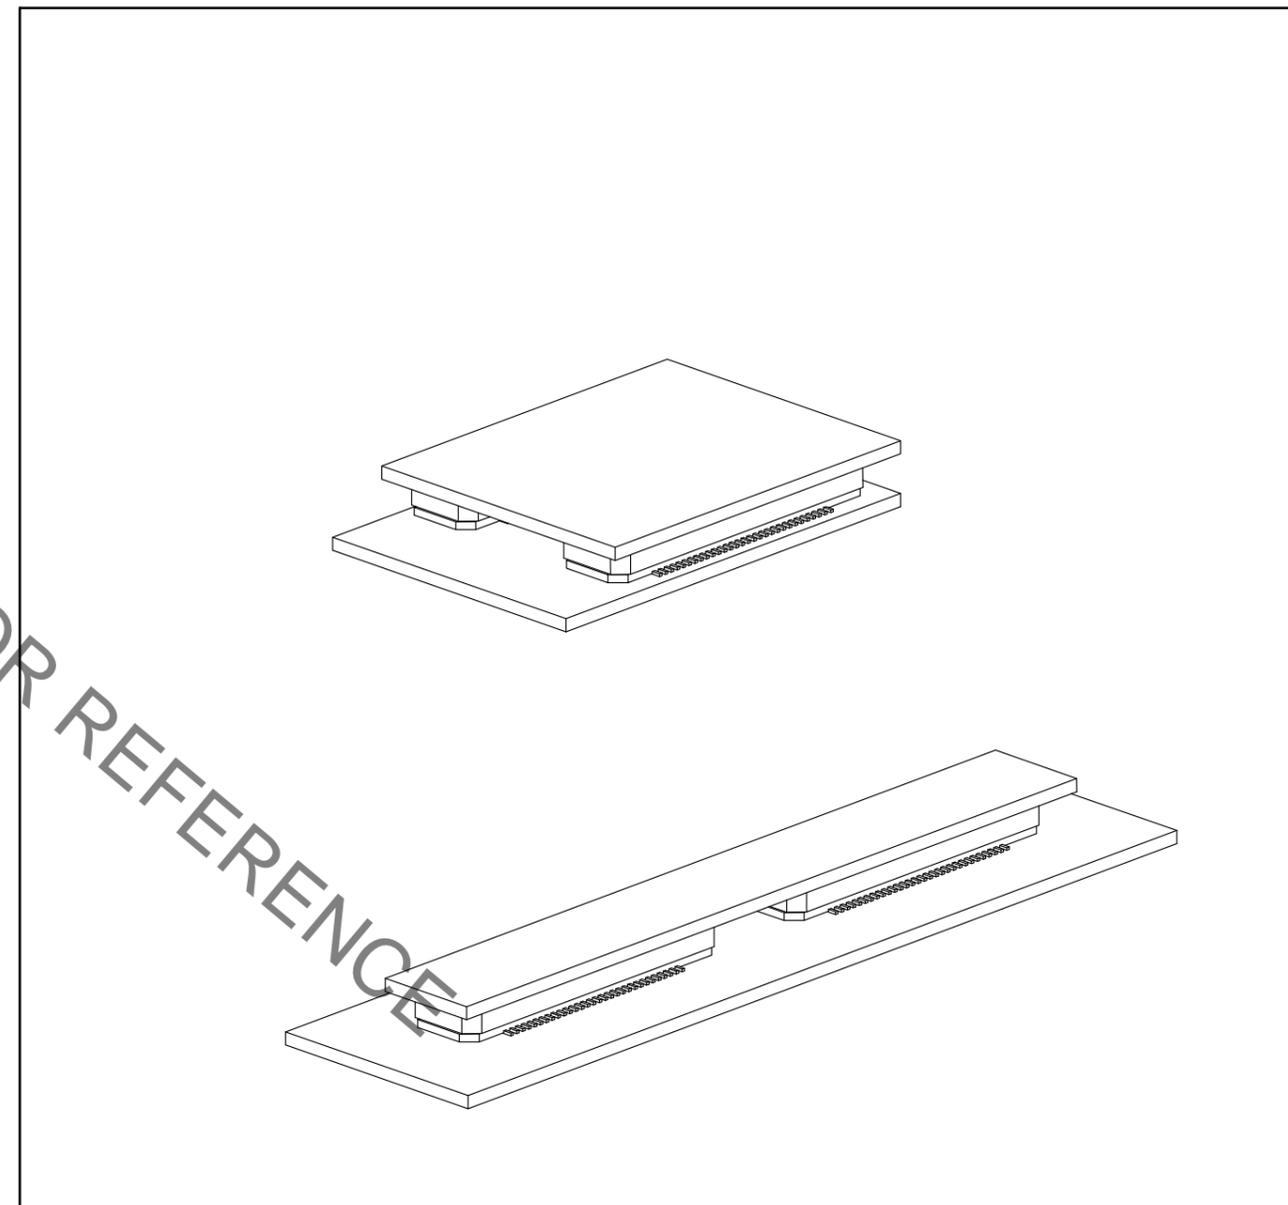

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC-150863-71-25
	PART NO.	FX8C-100P-SV4(71)
	CODE NO.	CL578-0585-9-71
		2/2