


D

C

B

A

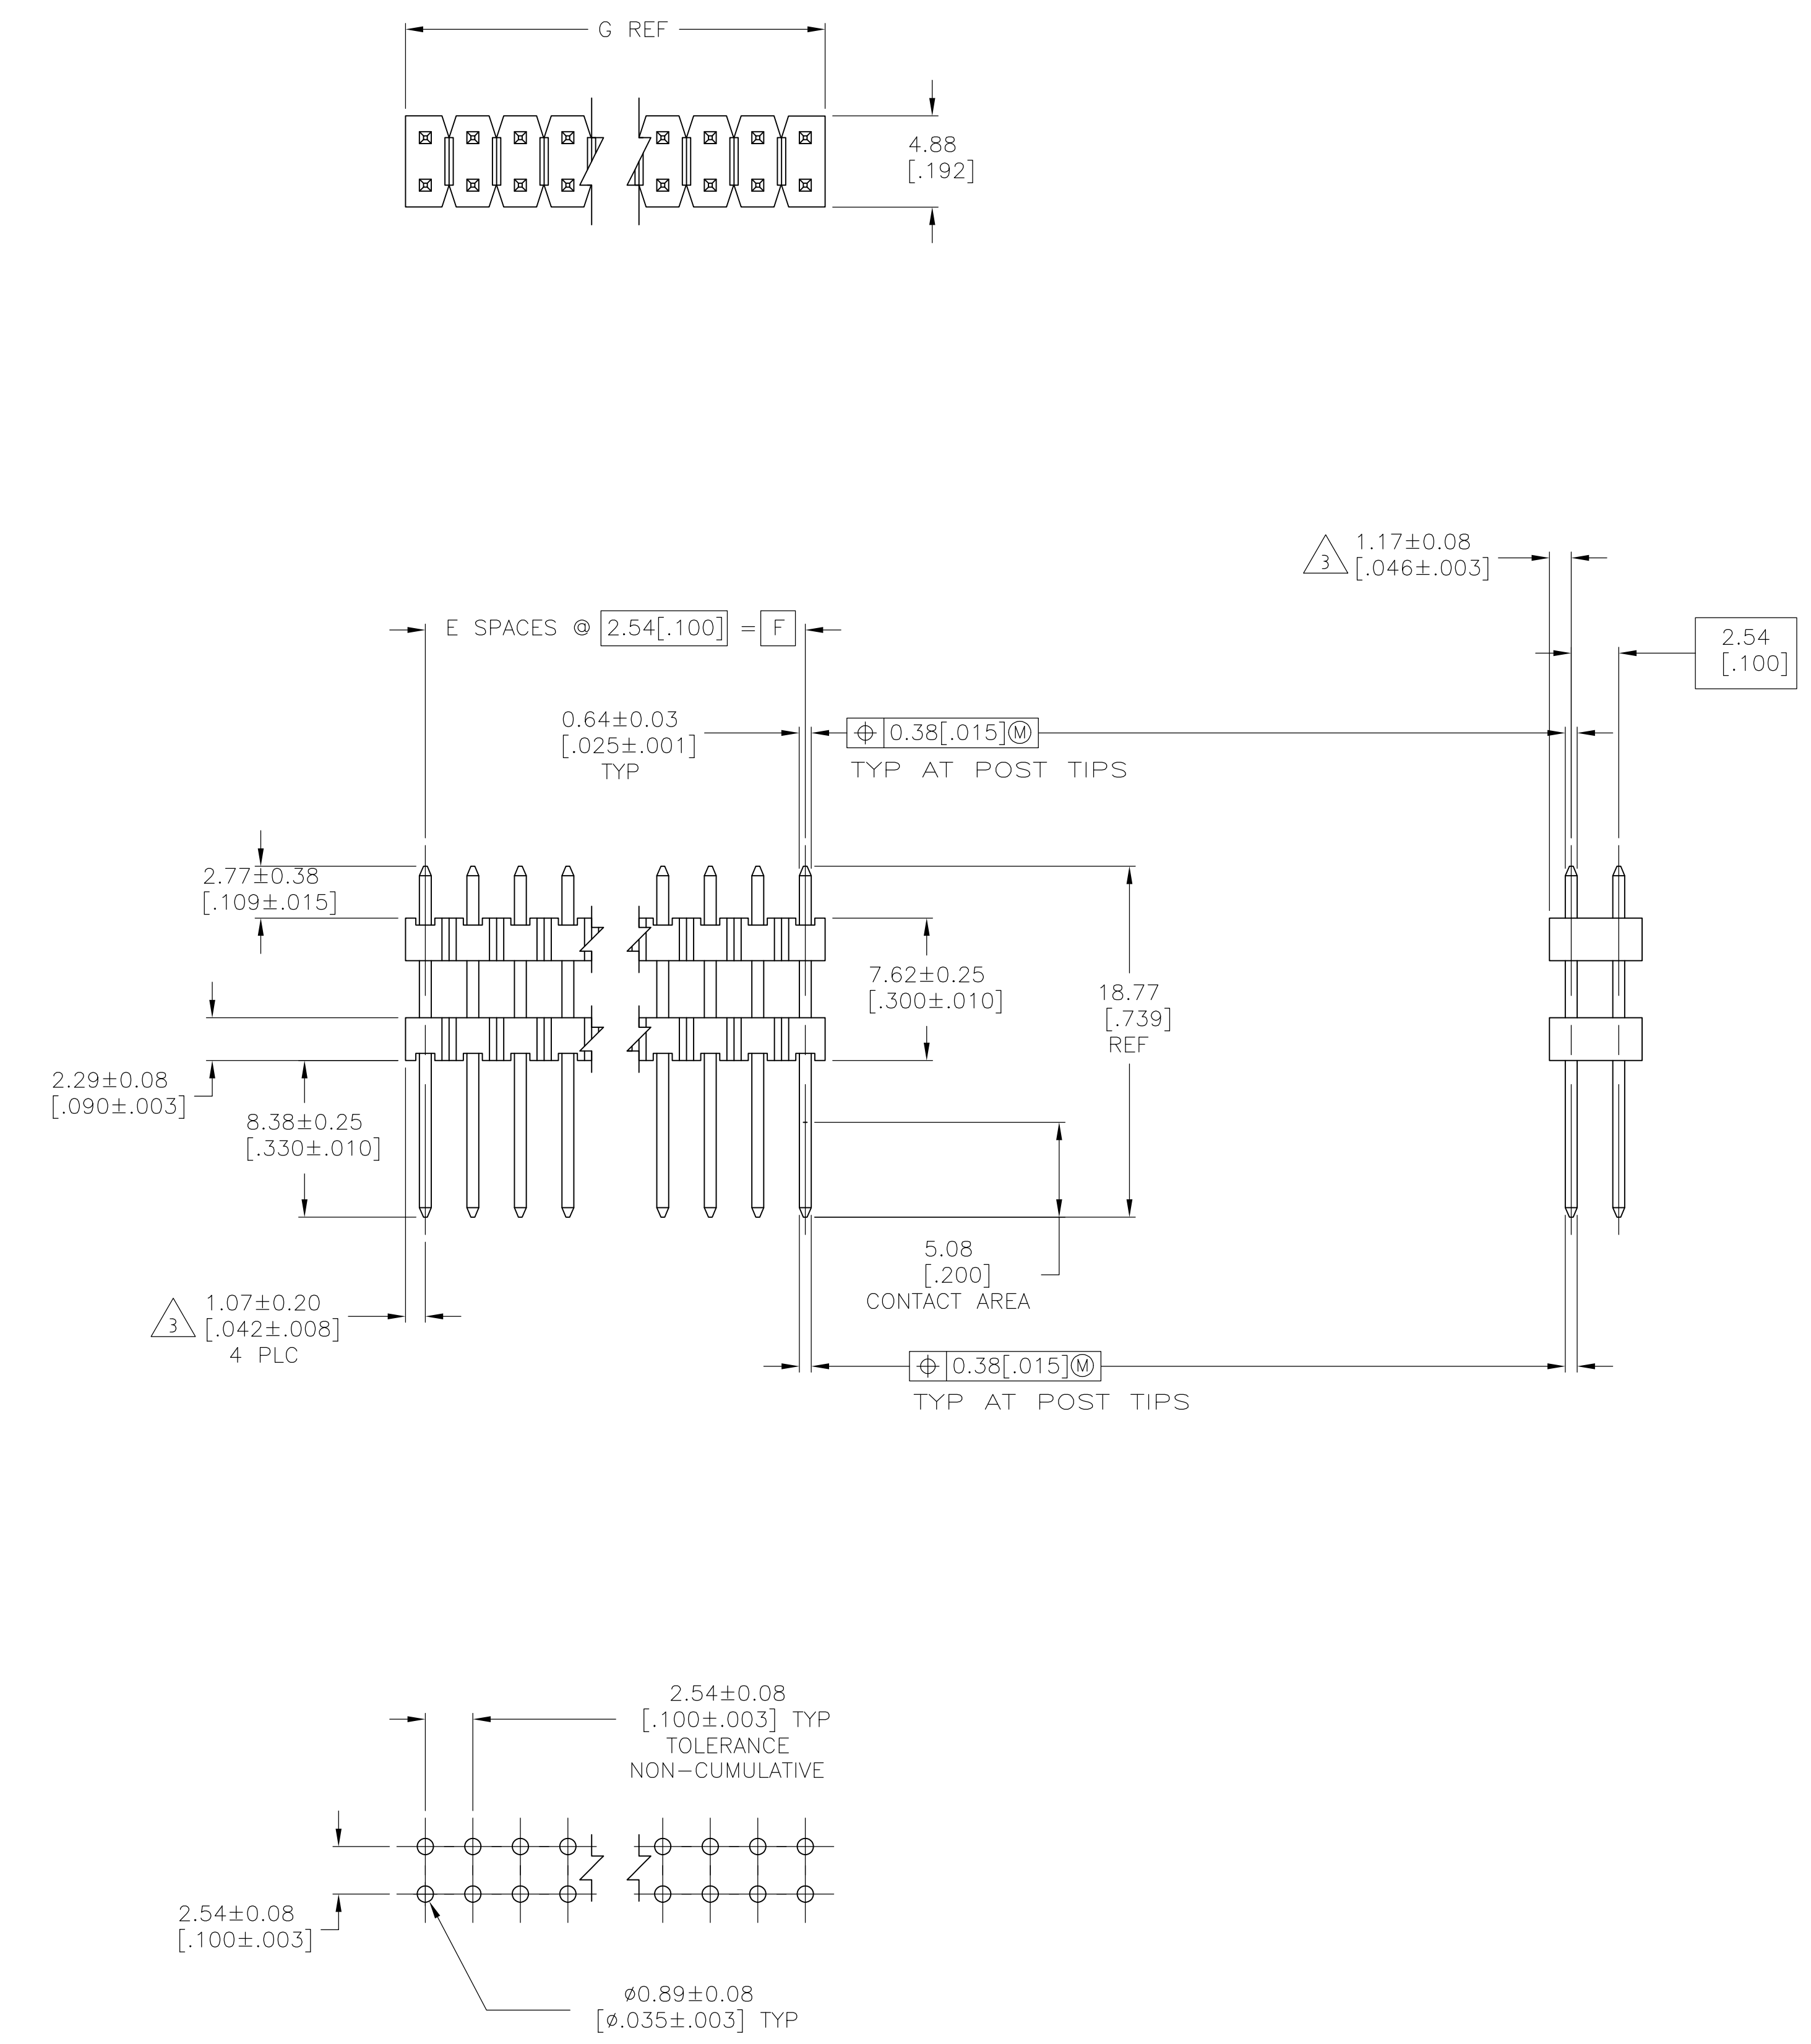

RECOMMENDED HOLE LAYOUT

- 1
- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4
- HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
- 5
- FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [0.000100-0.000200] MATTE TIN-LEAD ON SOLDER TAIL,
0.00127 [0.000050] NICKEL ENTIRE POST.
- 6
- FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA,
0.00254-0.00508 [0.000100-0.000200] MATTE TIN ON SOLDER TAIL,
0.00127 [0.000050] NICKEL ENTIRE POST.

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R BROWN

CHK
J GESFORD

APVD
J GESFORD

19OCT2006
19OCT2006
19OCT2006

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± 0.5[02]

2 PLC ± 0.13[005]

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH SEE TABLE

4

NAME
HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
.025 SQ.POST, UNSHROUDED

SIZE
A1

CAGE CODE
00779

DRAWING NO
146490

RESTRICTED TO
-

SCALE
4:1

SHEET
1 OF 2

REV
B

CUSTOMER DRAWING

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-146490-4](#)