

MICRO SWITCH
FREEPORT, ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
22HR29-12

22HR29-12

M

DRAWING
NUMBER

ISSUE

14

REPLACES

RELEASE NO. PR-8638

CHECK

REVISIONS

A	PR-8638
D J W	22 APR 80
B	C047573
TSM	17 JULY 80
C	C047277
J A P	9 JAN 81

CHECK

23 APR 80

CHECK




80

22 APR

D J W

FO-52851-A

DRAWN

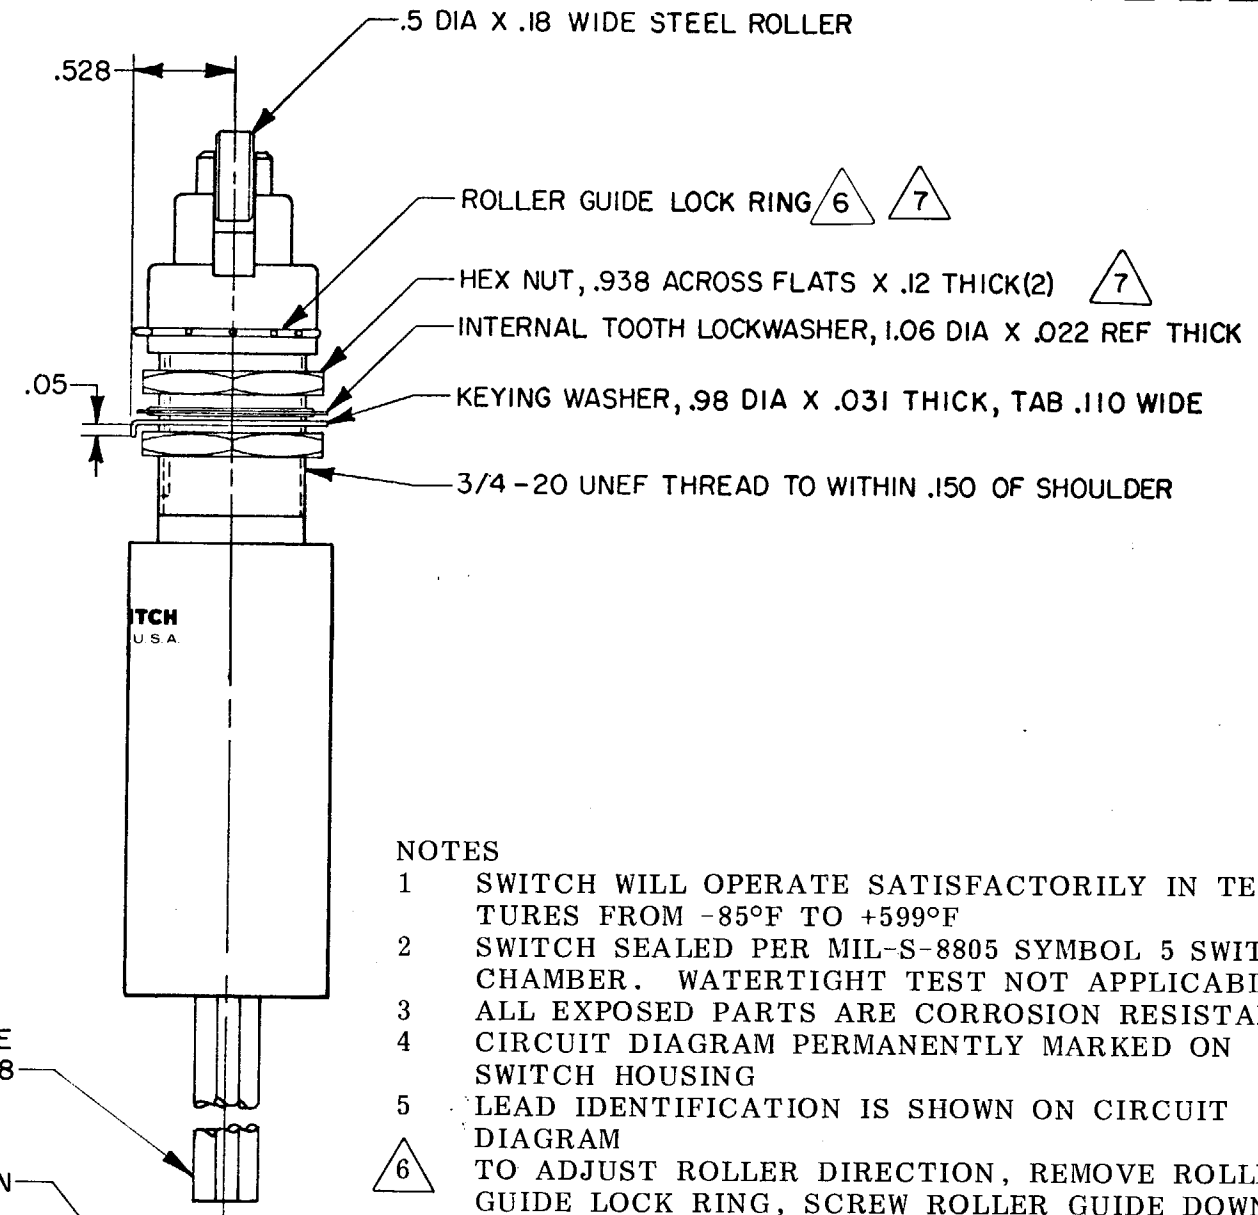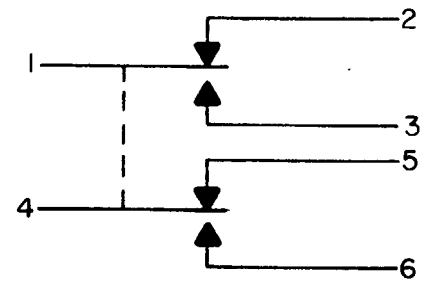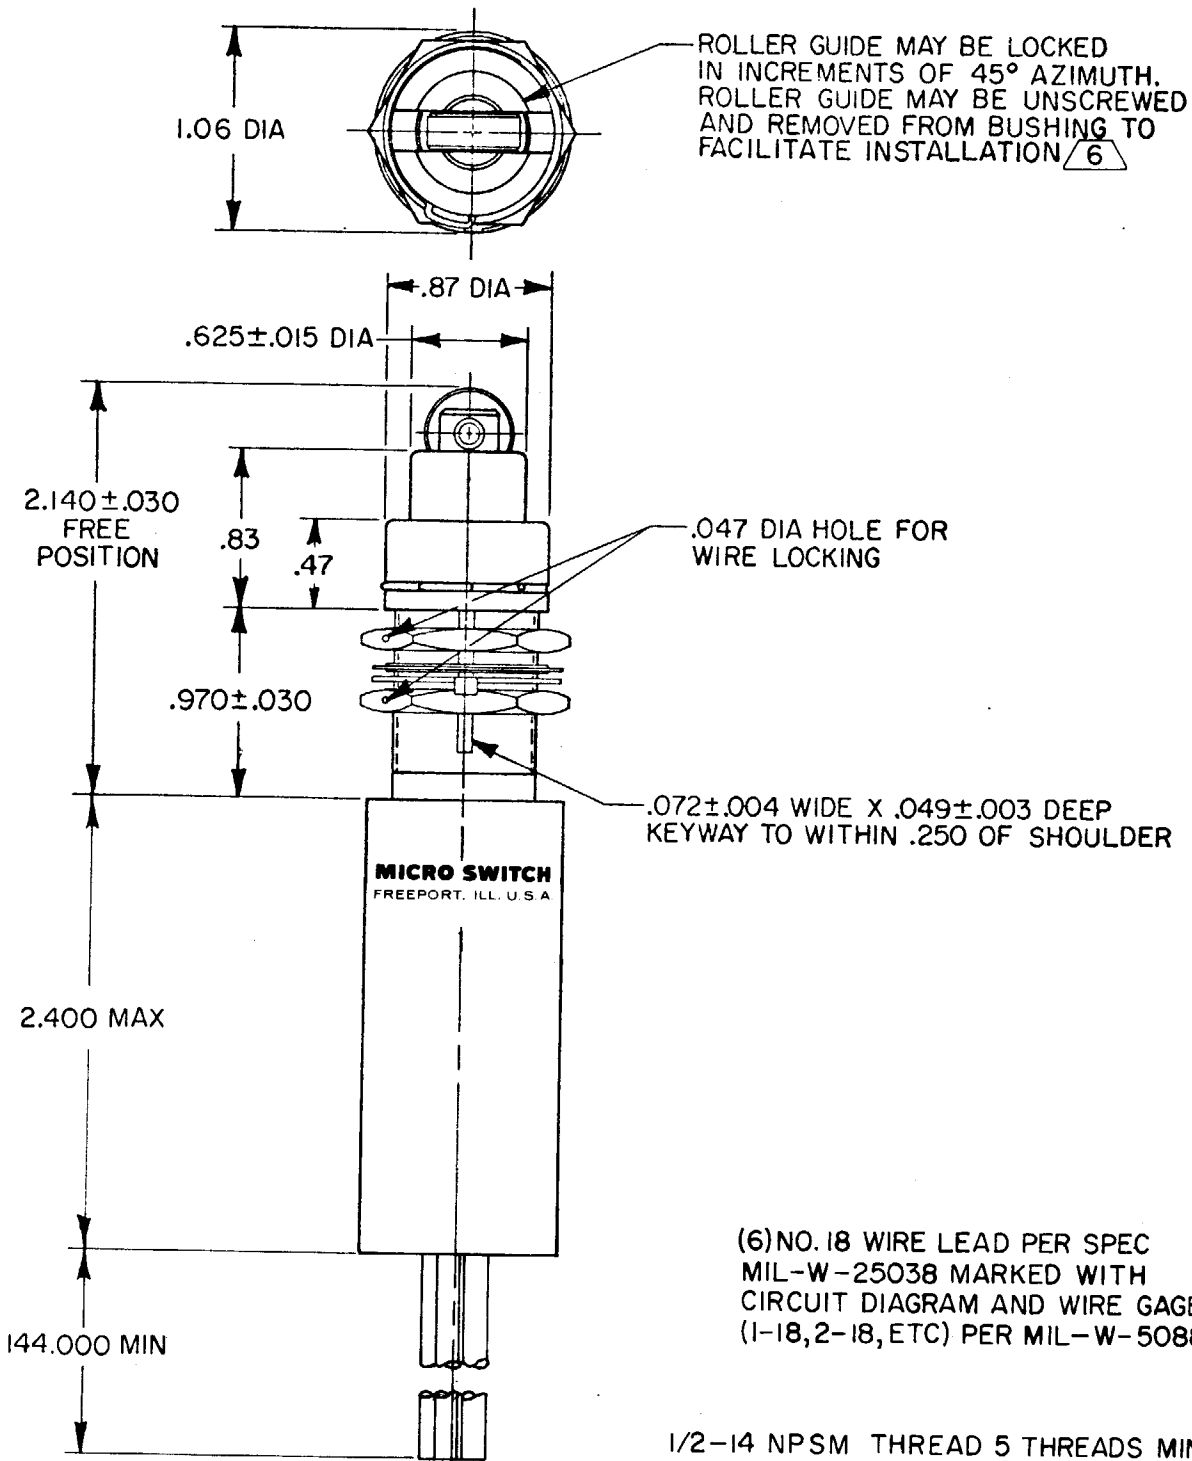

NOTES

- SWITCH WILL OPERATE SATISFACTORILY IN TEMPERATURES FROM -85°F TO +599°F
- SWITCH SEALED PER MIL-S-8805 SYMBOL 5 SWITCH CHAMBER. WATERTIGHT TEST NOT APPLICABLE
- ALL EXPOSED PARTS ARE CORROSION RESISTANT
- CIRCUIT DIAGRAM PERMANENTLY MARKED ON SWITCH HOUSING
- LEAD IDENTIFICATION IS SHOWN ON CIRCUIT DIAGRAM
- TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION, SECURE BY REPLACING ROLLER GUIDE LOCK RING
- HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
- COINCIDENCE OF OPERATING AND RELEASING POINTS .005 INCH OF PLUNGER TRAVEL

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/04	X
ONE PLACE	X,X	0.41/0.15	X,X
TWO PLACES	X,XX	0.15/0.06	X,XX
THREE PLACES	X,XXX	0.06/0.015	X,XXX
ANGLES		0.13/0.005	

DESIGN UNITS ☐ SI METRIC ☒ US CUSTOMARY

RAW MATERIAL—COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED

WEIGHT 15.7 OZ MAX

CHARACTERISTICS

OPERATING FORCE	6-12 LB
FULL OVERTRAVEL FORCE	35 LB MAX
RELEASE FORCE	5 LB MIN
PRETRAVEL	.050 MAX
DIFFERENTIAL TRAVEL	.015 MAX
OVERTRAVEL	.250 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT SPDT(2)		
LOAD	28 VDC	
	SEA LEVEL	50,000 FT.
RES	5	
IND	2	
MOTOR		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[22HR29-12](#)