


STRIPPING DIMENSION

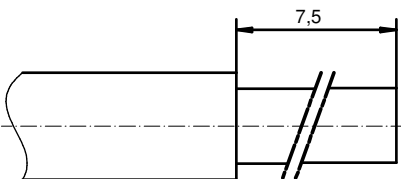

Directive 2002/95/EC RoHS compliant

3	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
2	1	REAR SIDE	COPPER ALLOY	GOLD FLASH over NICKEL
1	1	FRONT SIDE	COPPER ALLOY	min. 30µin HARD GOLD over min. 50µin NICKEL
pos	qty	description	material	plating

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND		tolerance		dim. in mm	scale: 5:1	
		ISO 2768-m			material: SEE PARTLIST	
drawn	03.01.11	name		title:		
appd.	03.01.11	name		HIGH POWER CONTACT MALE		
norm				SOLDER CUP 30A FOR AWG 10-12; d=3,5mm		
d-old				D-SUB COMBINATION		
a	Origin			dwg no:		DIN-A3
rev.	description	date	name	13K1A3531		sh: 1
				part no:		131C10139X



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[131C10139X](#)