


12

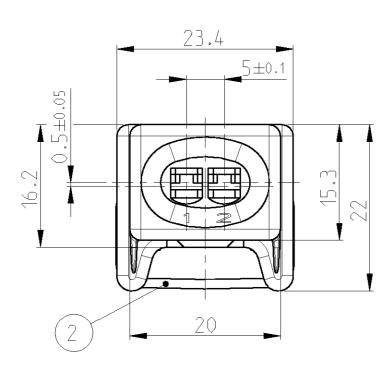

А

D

С

В

		2														
					гос Д	DIST —	P L	TR			REVISION		DA	TE DWN	APVD	
							A	4 R	EVISED	PER	ECO-11-005294		29AP	R11 RK	HMR	
																D
										(T			С
, ,															-	
2 • •																
			1	1	1	1	9 9 9 9 9 9	27 27 27 27 27 27 27	374 - 374 - 374 - 374 - 374 - 374 - 374 - 374 -	.7 .6 .5 .4 .3 .2	2 POS. HOUSING		PA 6.6 GFV 30	YELL RE GRE BLL BRO BLA GRE NATU	D EN JE W N C K	B
		827 551-8 1 1 827 551-8 1 1	27 551-6 -	27 551-	827 551-4 T T 827 551-3 T T	827 5	1 8 1 8 1 2	327 325 PAR ⁻	547- 383- T-NO	-1	SPRING SEALING DESCRIPTIC	2	DIN 2076 NEOPRENE MATERIAL			
	DIMENSION	S:	1 PLC 2 PLC	TRANCES I WISE SPE 0.3mm ±-	UNLESS CIFIED:	PRODUCT	(her.M.	12 JUL 09 AUG 25 AUG	1983	NAME 2 [Constant for the second secon		TE Connec DUSING ER CONTAC nior-Timer		+	А
	MATERIAL	_	3 PLC 4 PLC ANGLES FINISH	± ±	±2,5°	— WEIGHT		_		A 2		NG NO		RESTR	істер то — ^{EV} A4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>827551-3</u>