

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705550094

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 25 Circuits, 0.76µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400-001 (PDF)

Product Specification PS-70541-001 (PDF)

Product Specification TS-70541-001-001 (PDF)

Product Specification TS-70541-100-001 (PDF)

Packaging Specification PK-70873-0015 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

General

Product Family

Series

Application

Overview

Product Name

UPC

PCB Headers

70555

Signal, Wire-to-Board

SL Modular Connectors

SL

800753767508

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

Flammability

Glow-Wire Capable

Guide to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Shrouded

Stackable

Temperature Range - Operating

Termination Interface: Style

No

25

25

Black

50

94V-0

No

Yes

Yes

Brass, Phosphor Bronze

Gold

Tin

High Temperature Thermoplastic

5.518/g

1

Right Angle

3.30mm

Yes

Yes

1.60mm

Tube

2.54mm

0.762µm

1.905µm

Yes

Fully

No


-40° to +105°C

Through Hole

Electrical

Current - Maximum per Contact

3.0A

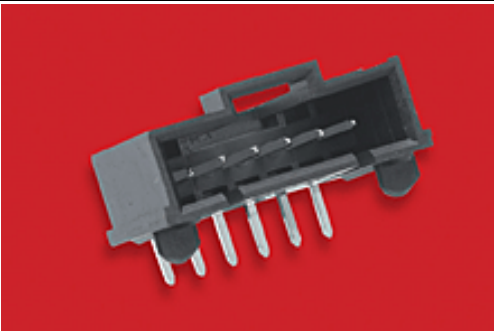

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Relevant

RoHS Phthalates

Not Reviewed

Search Parts in this Series

70555 Series

Mates With

SL Crimp Housing 70066 Option N, 70066 Option G, 70430 Option G, 70400 Option G

Voltage - Maximum	250V
Solder Process Data	
Lead-freeProcess Capability	WAVE
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0015
Product Specification	PS-70400-001, PS-70541-001, TS-70541-001-001, TS-70541-100-001
Sales Drawing	705550000-SD-000

This document was generated on 11/01/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[70555-0094](#)