

NUMBER C-175111







METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

AMP-J
REV. 10/83

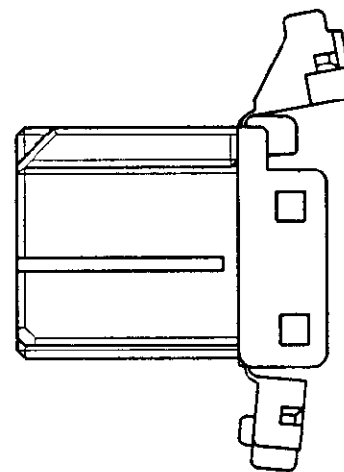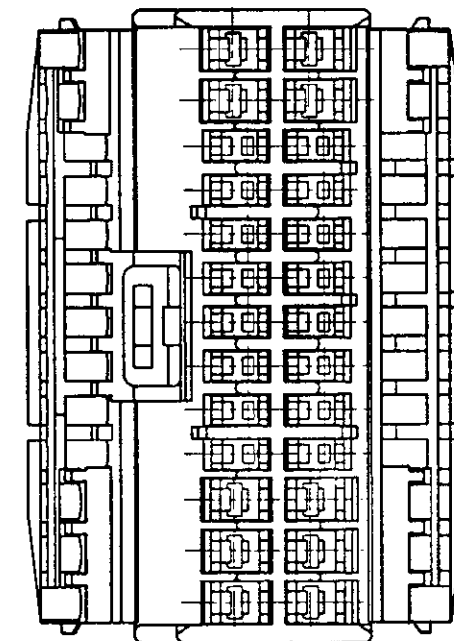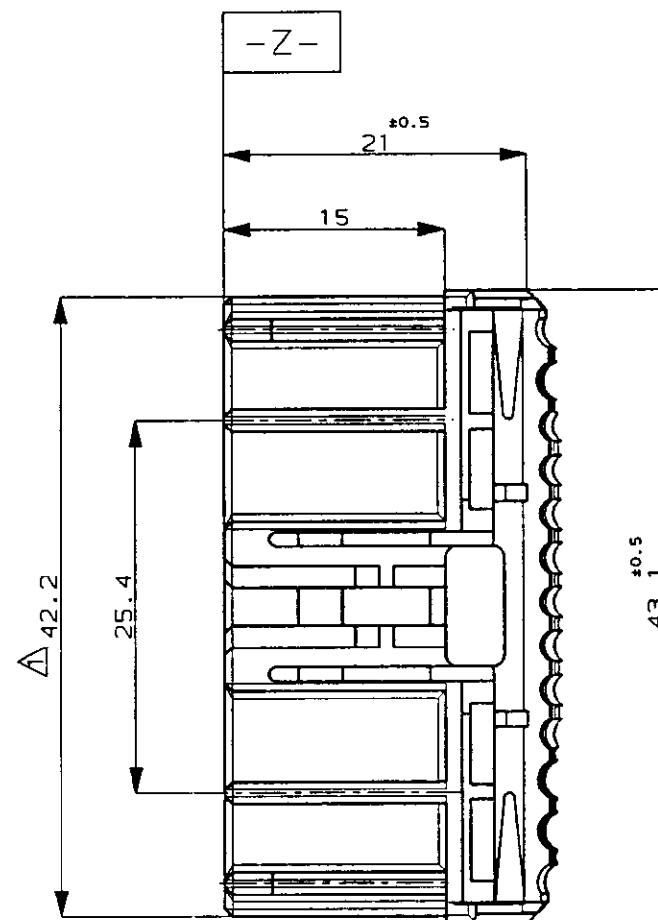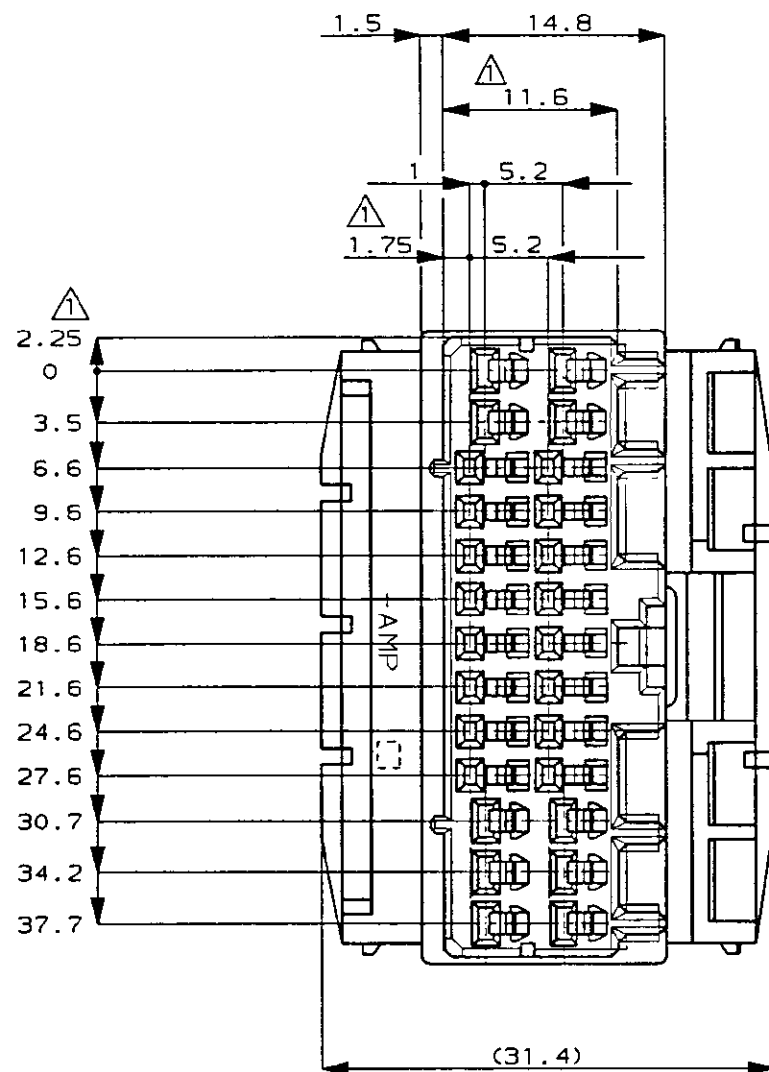

NOTES;

1. MUST BE KEPT BETWEEN -Z- AND 2mm.
2. APPLIED CONTACT PART NUMBER; 173681, 173630, 173631
3. APPLICABLE PRODUCT SPEC. 108-5280

注:

1. -Z- 面より 2mm の範囲で測定
2. 内装するリセプタクルコンタクト型番: 173681, 173630, 173631
3. 適用製品規格番号 108-5280

				Copyright ©1989年 AMP (Japan) LTD. ALL RIGHTS RESERVED.		Copyright ©1989 AMP (Japan) LTD. ALL RIGHTS RESERVED.		AMP AMP (JAPAN), LTD. Tokyo, Japan	
C	追加 -S	FJ00-2749-95	KS	5.0	61.8	WIRE RANGE mm ² (AWG)	INSULATION DIA mm	NAME 26pos. PLUG HOUSING .040/.070 HYBRID I/O CONN. T.F 26極 プラグハウジング .040/.070 ハイブリッド I/O コネクタ T.F	
B	変更 J-0413		AT	10/14	91	材料 MATERIAL PBT	色 COLOR 表参照 SEE TABLE	GENERAL TOLERANCE	SIZE LOC NUMBER
A	変更 J-0015	YF	KY	4/16	91	DR. K. Suzuki 10/31/89	DE. K. Suzuki 11/15/89	0<≦ 10 : ±0.2 10<≦ 30 : ±0.25 30<≦ 100 : ±0.3 ANGLES : ±3°	A3 J C-175111
O	作成 J-10927	KS	KY	11/15	89	CHK. M. Matsushita 11/15/89	APP. K. Suzuki 11/20/89	SCALE 2-1	REV. C SHEET
LTR	REVISION RECORD		DR	CHK	DATE				

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1751111-8](#)