



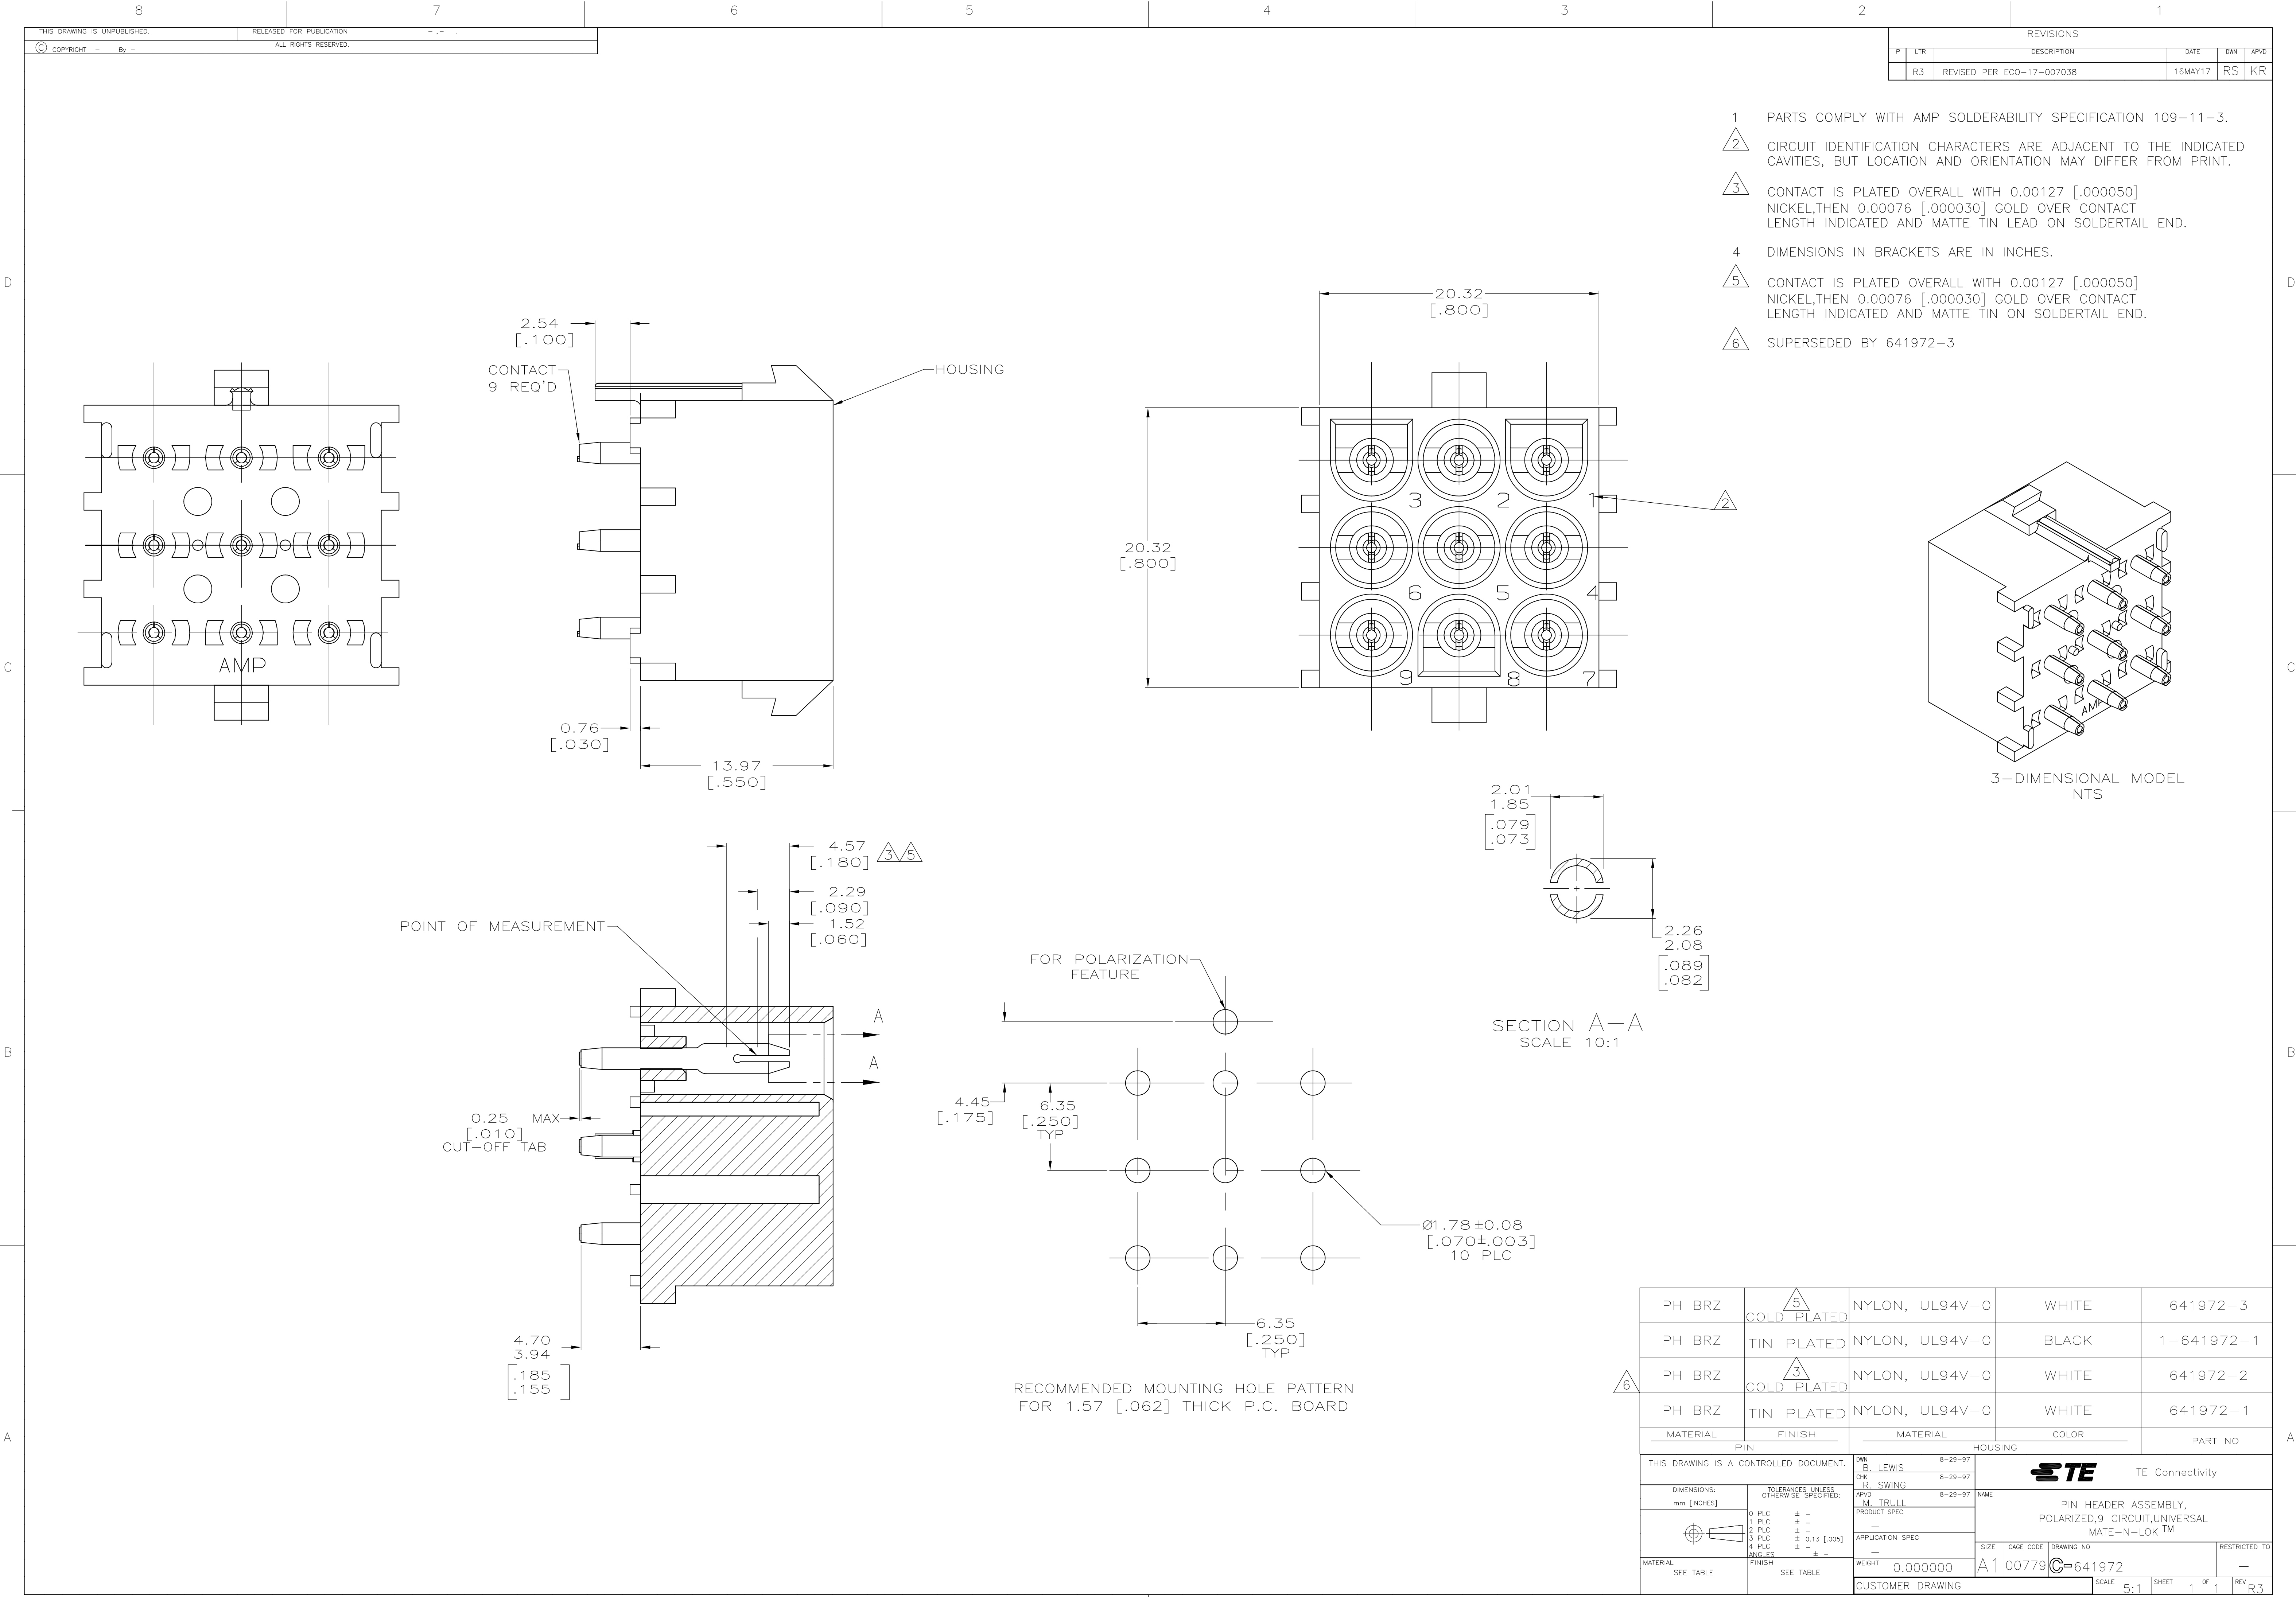

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
R3		REVISED PER ECO-17-007038	16MAY17	RS	KR


- 1 PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-3.
- 2 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3 CONTACT IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL, THEN 0.00076 [0.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 CONTACT IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL, THEN 0.00076 [0.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- 6 SUPERSEDED BY 641972-3

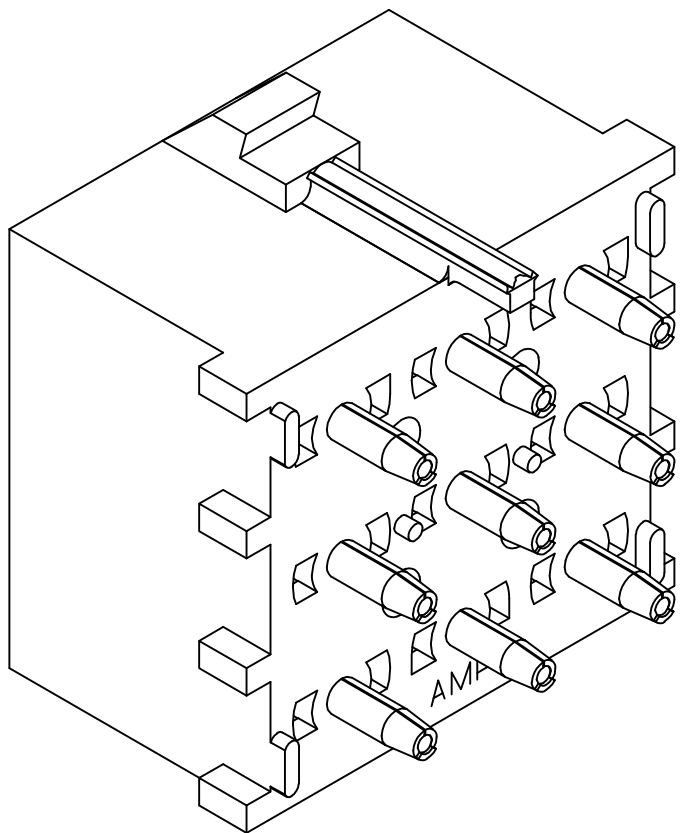

3-DIMENSIONAL MODEL NTS

SECTION A-A
SCALE 10:1

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [0.062] THICK P.C. BOARD

PH BRZ		5 GOLD PLATED		NYLON, UL94V-0	WHITE	641972-3			
PH BRZ		TIN PLATED		NYLON, UL94V-0	BLACK	1-641972-1			
PH BRZ		3 GOLD PLATED		NYLON, UL94V-0	WHITE	641972-2			
PH BRZ		TIN PLATED		NYLON, UL94V-0	WHITE	641972-1			
MATERIAL		FINISH		MATERIAL	COLOR	PART NO			
PIN				HOUSING					
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN B. LEWIS CHK R. SWING APVD M. TRULL 8-29-97 8-29-97 8-29-97 STE TE Connectivity PIN HEADER ASSEMBLY, POLARIZED,9 CIRCUIT,UNIVERSAL MATE-N-LOK™					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:						NAME	
		0 PLC ± -						PRODUCT SPEC	
		1 PLC ± -						APPLICATION SPEC	
		2 PLC ± -						SIZE	
		3 PLC ± -		CAGE CODE					
4 PLC ± -		0.13 [0.005]		DRAWING NO					
ANGLES ± -		± -		RESTRICTED TO					
MATERIAL		FINISH		WEIGHT		0.000000			
SEE TABLE		SEE TABLE		A1 00779		641972			
CUSTOMER DRAWING				SCALE		5:1			
				SHEET		1 OF 1			
				REV		R3			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[641972-3](#)