
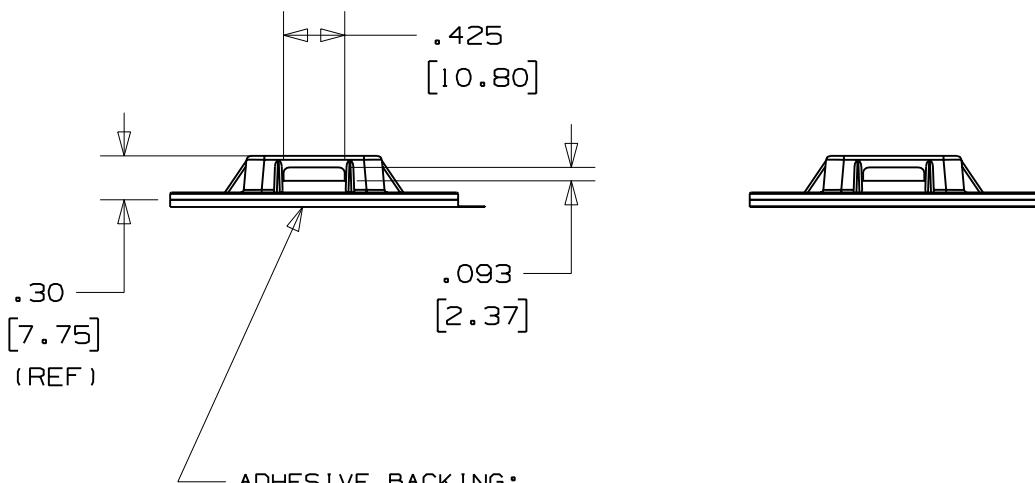


NO WARRANTY, EXPRESSED OR IMPLIED IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE. AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND / OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

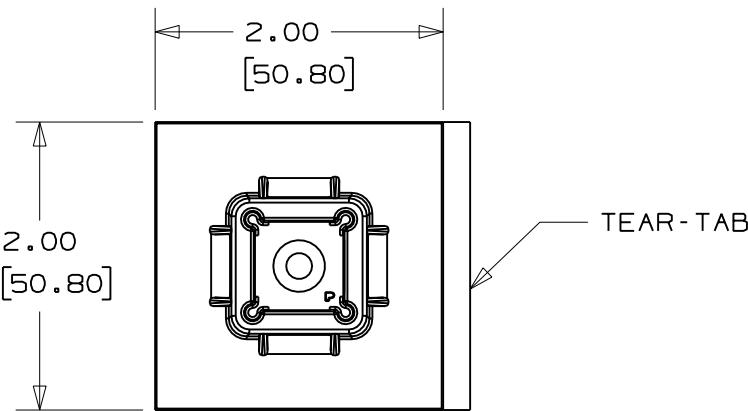

ADHESIVE BACKING:

MOUNT IS DESIGNED TO SUPPORT 2.0 lbs (907g) MAX. WEIGHT ON A CLEAN DRY SMOOTH SURFACE.


*[-A] RUBBER BASED ADHESIVE PRESSURE SENSITIVE FOAM TAPE 0.04 (1.0) THICK WITH A PROTECTIVE LINER.

*[-AT] ACRYLIC BASED ADHESIVE PRESSURE SENSITIVE FOAM TAPE 0.04 (1.0) THICK WITH A PROTECTIVE LINER.

PANDUIT PART NO.	REC'M FASTENER	USE WITH THESE CABLE TIE CROSS SECTIONS	WEIGHT LBS / 100 (g) / PCS
SGABM50-A- --- ABM50	RUBBER ADHESIVE	M, I, S, LH, H SG100M, SG150I, SG200S, SG250S, SG300S, SG370S, SG350LH, SG450H	1.2 (544.3)
SGABM50-AT- --- ABM50B	ACRYLIC ADHESIVE		

NOTES

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND COLOR.
2. HOLE FOR STANDARD #8 FLAT HEAD SCREW.
3. [-A] MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 120°F (49°C).
[-AT] MOUNT HAS A MAXIMUM CONTINUOUS OPERATING TEMPERATURE OF 180°F (82°C).

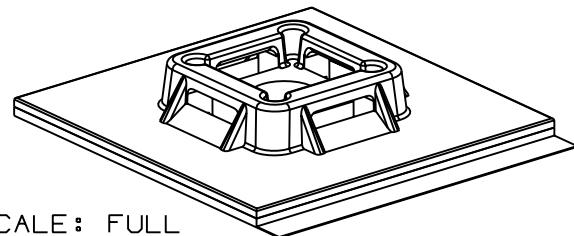

SCALE: FULL

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS G03150FH_PB_SGABM50_01

PANDUIT CORP.

TINLEY PARK, ILLINOIS

ADHESIVE BACKED MOUNT - SUPER GRIP COMPATIBLE (SGABM50- ---)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± 0.05 (.1.3) (.XXX) ± 0.010 (.0.25)
(.XX) ± 0.02 (.0.51) ANGLES $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE
PROJECTION.

DRAWN BY
JAD

MAT'L:

SCALE
3/4

NYLON 6/6

DRAWING NO.
GB3150FH

DWG
A
SIZE

1

9/20/06

JAD

UPDATE, ADD TEAR TAB

GB3150FH

1

DATE
6/12/06

CHK'D

REV

DATE

BY

CHK

DESCRIPTION

ECN - R

CUST

SUP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[SGABM50-A-L](#) [SGABM50-AT-L0](#)