

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0452801252

Status:


Active

Overview:

Micro-Fit Connector System

Description:

Micro-Fit BMI CPI Compliant Pin Header, Blind Mate Interface, Dual Row, Vertical, 12 Circuits, PA Polyamide Nylon 4/6, UL 94V-0, 0.38µm Gold (Au) Selective Contact Plating, Tin (Sn) Tail Plating

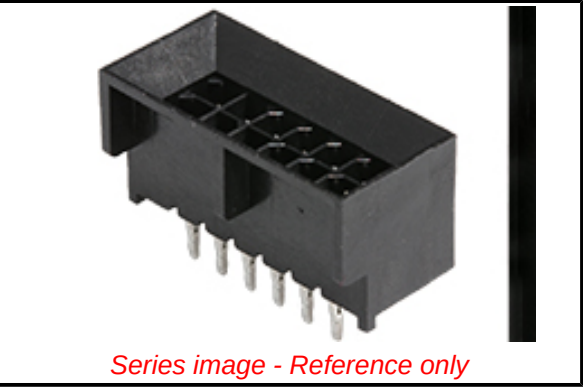

Series image - Reference only

Documents:

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[3D Model](#)

[Product Specification PS-44300-001-001 \(PDF\)](#)

[Test Summary TS-45280-001-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Product Literature \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
Application tooling part link	
Application Tooling Part Link	62200-2700
Application Tooling Part Link	62200-8400
Application Tooling Part Link	62203-0450
General	
Product Family	PCB Headers
Series	45280
Application	Board-to-Board, Power, Wire-to-Board
Overview	Micro-Fit Connector System
Product Name	Micro-Fit BMI CPI
UPC	822350222846
Physical	
Breakaway	No
Circuits (Loaded)	12
Circuits (maximum)	12
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.356/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	4.80mm
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ECHA_01_2020 (16 January 2020	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

45280 Series

Mates With

441331200 Micro-Fit BMI Panel Mount Receptacle Housing, 447691202 Micro-Fit BMI Vertical Receptacle Header, 447641202 Micro-Fit BMI Right Angle Receptacle Header

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Insertion Tool for Micro-Fit BMI CPI Header Assemblies	622002700
Compliant Pin Insertion Flat Rock Tool	622008400
Removal Tool	622030450

Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	8.5A
Voltage - Maximum	600V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-44300-001-001
Sales Drawing	SD-45280-002
Symbol/Footprint Data	SYM-45280-1201
Test Summary	TS-45280-001-001

This document was generated on 04/20/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[45280-1252](#)