

D


С


В

4805 (3/11)





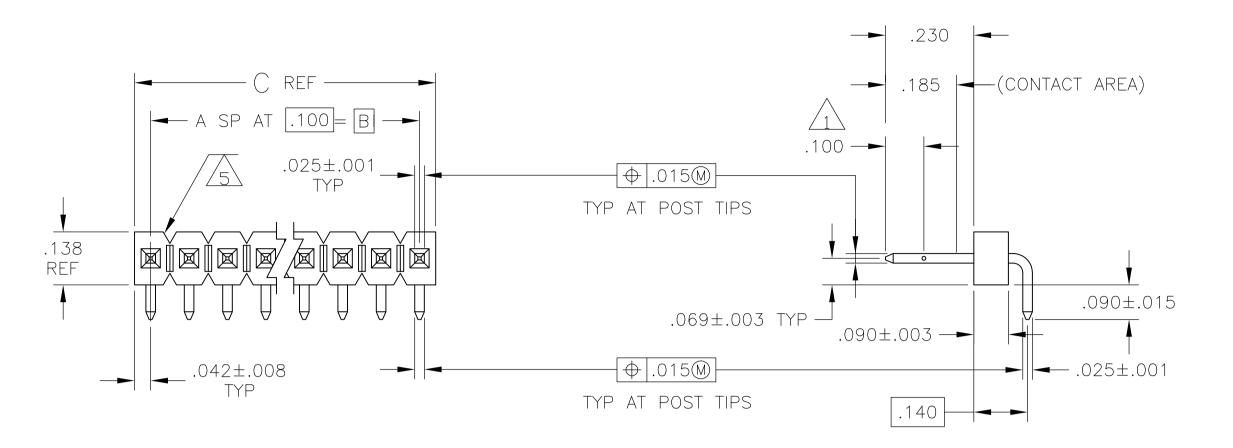

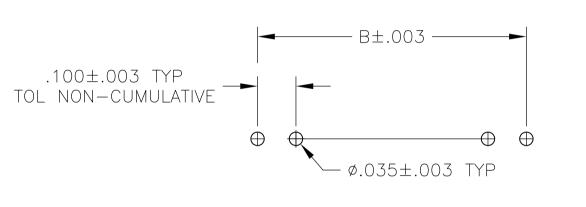





2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.



.000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER .000050 NICKEL 4



 $\overline{7}$ HIGH TEMPERATURE CONFIGURATION

8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

OBS OBS

OBS

OBS

OBS



0B; 0B; OB

8 SUPERCEDED BY 6-10 8 OBS

8 SUPERCEDED BY 6-10 OBZ

8 OBS

8 OBS

THIS DRAWING IS A DIMENSIONS: INCHES  $\oplus$ HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK 1ATERIAL POSTS: COPPER ALLOY

	7		6	3.98	84	3.900	39	40	9-103	765-0	
						3.400	34	35	8 8	-5	
SOLETE			6			2.900	29	30	8		
			6			2.400	24	25	7 -	5	
						1.900	19	20	/ _	- 0	
SOLETE			6			1.300	13	14	6 –		
						1.200	12	13	6		
SOLETE			6			1.100	11	12	6 —		
001111			6			1.000	10	1 1	6 -		
				.98		.900	9	10	6 —		
SOLETE				.88	4	.800	8	9	5 -	9	
			6	.78	4	.700	7	8	5 —	- 8	
SOLETE				.68	4	.600	6	7	5 -	7	
			6	.58		.500	5	6	5 -	- 6	
			6	.48		.400	4	5	5 -	- 5	
			<u>6</u>	.38		.300	3	4	5 —	- 4	
	<u> </u>			.28		.200	2	3	5 -	- 3	
SOLETE						. 100		1	5-103		(
JULLIL				3.98		3.900	39	40	4 - 103		
BSOLETE			4	3.88			38	39	3 -	- 9	
BSOLETE						3.700	37	38	3 –	- 8	
BSOLETE			4	3.68			36	37	3 –	- 7	
BSOLETE			4	3.58	34	3.500	35	36	3 —	- 6	
SOLETE			4	3.48				35	3 –	5	
BSOLETE			4			3.300	33	34	3 –	- 4	
BSOLETE			4	3.28			32	33	3 –	- 3	
BSOLETE			4			3.100	31	32	3 –	- 2	
<u>SOLETE</u>			4	3.08			30	31	3 -	<u> </u>	
solete Bsolete			4	2.88		2.900	<u>-29</u> 28	<u> </u>	3 - 2 -	0	
BSOLETE			4	2.78			28	29	2 -	- 8	
BSOLETE				2.68			26	27	2 -	- 7	
BSOLETE						2.500	25	26	2 -	- 6	
SOLETE			$\wedge$	2.48				25	2 -	5	
BSOLETE			4	2.38	34	2.300	23	24	2 –	- 4	
BSOLETE			4	2.28	34	2.200	22	23	2 -	- 3	
BSOLETE			4	2.184			21	22	2 –	- 2	
BSOLETE			4	2.08			20	21	2 -	— 1	
			4			1.900	19	20	2 -	- 0	
BSOLETE			4			1.800	18	19	1 —	- 9	
<u>BSOLETE</u> BSOLETE			4			1.700	17	18	1 -	<u> </u>	
BSOLETE						1.500	15	16	1 —	- 6	
JOULLIL				1.48			14	15	1 —	- 5	
03765-4				1.38			13	14	1	4	
SOLETE			4	1.28	34	1.200	12	13	1		
			4	1.18	34	1.100	1 1	12	1 —	- 2	
03765-1			4	1.08	34	1.000	10	11	1	1	
8			4	.98		.900	9	10	1		
SOLETE			4	.88		.800		9		9	
			<u></u>	.78		.700	7	8		- 8 7	
SOLETE			4	.68 .58		.600	<del>0</del> 5	6		- 6	
			4	.48		.400	4	5		- 5	
				.38		.300	3	4		- 4	
			4	.28		.200	2	3		- 3	
				.18	4	.100	1	2		- 2	
SOLETE			4	.08	4			1	103	765-1	
							A	NO OF POS	ASSEMBLY PART NUMBER		
	REMARK	ŚŚ	PLATING	C		B					
		1									
		DWN		24JUL85							
CONTROLLED	DOCUMENT.	L. D. RINGLEY CHK		24JUL85 24JUL85		-	<b>TE</b>	TE (	Connectivity		
O PLC ± -			R. ELICKER APVD 24JUL85 R. ELICKER PRODUCT SPEC			ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, RIGHT ANGLE					
3 PLC ± .005 4 PLC ± - ANGLES ± -			_		SIZE	SIZE CAGE CODE DRAWING NO RESTRICTED TO					
FINISH	TABLE	Weight _ $A100779$ C= 103765									
Y		CUSTOMER DRAWING					SCA	4:1 s	HEET OF	REV	

D

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: 5-103765-4