




SMA Quick-Connect Product Family

The Johnson SMA **Quick-Connect** Plug quickly mates to a standard, threaded SMA Jack receptacle allowing rapid test connections to devices utilizing SMA threaded jacks.

SMA electrical performance is not compromised because the connector retains all the benefits of a threaded coaxial coupling. The final connection is a solid metal to metal coupling not relying on spring forces to maintain the coupling. This results in a more reliable connection with less signal leakage and a lower VSWR than most push-on connectors.

Full Mil-C-39012 electrical compatibility is obtained with a push and twist motion. The knurled thumbnut requires only one half to one full turn to create a solid electromechanical connection. Rapid disconnect is accomplished with a twist and pull motion.

The SMA **Quick-Connect** Plug Adapter converts a standard SMA Plug test cable into a **Quick-Connect** cable. This makes the testing process more efficient by reducing the time and effort required to connect and disconnect the test cable.

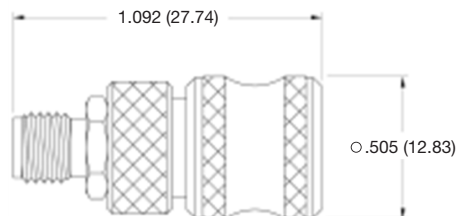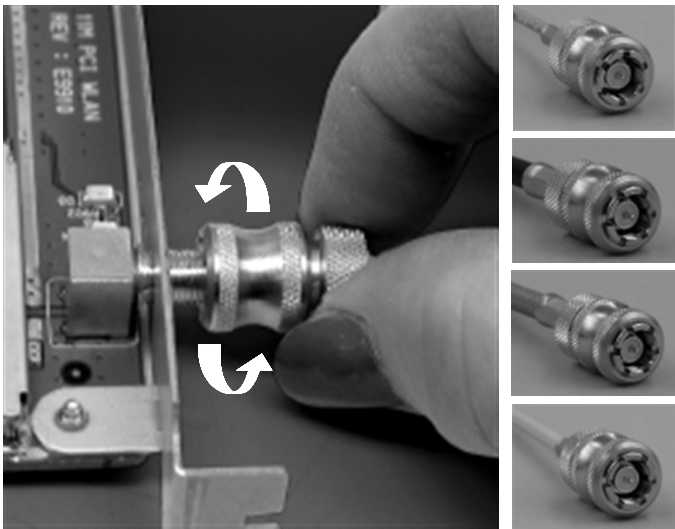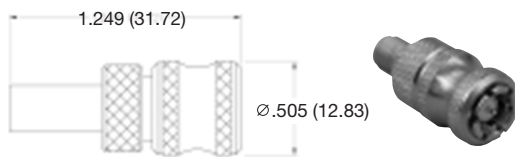

ADAPTER

VSWR & Frequency Range	Gold Plated*
1.05 + .005 f (GHz) 0-18 GHz	142-1901-821

PLUGS

Cable Type	VSWR & Frequency Range	Gold Plated*
RG-161/U, 174, 188, 316	1.15 + .02 f (GHz) 0-12.4 GHz	142-1403-001
RG-188 DS, RG-316 DS	1.15 + .02 f (GHz) 0-12.4 GHz	142-1404-001
RG-58/U, 141, 303	1.15 + .01 f (GHz) 0-12.4 GHz	142-1407-001
RG-55/U, 142, 223, 400	1.15 + .01 f (GHz) 0-12.4 GHz	142-1408-001

*Nickel plated coupling hardware, gold plated body



Cinch Connectivity Solutions
299 Johnson Avenue SW, Suite 100
Waseca, MN 56093 USA

+1 507.833.8822

cinchconnectivity.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[142-1408-001](#) [142-1407-001](#) [142-1403-001](#) [142-1404-001](#)