
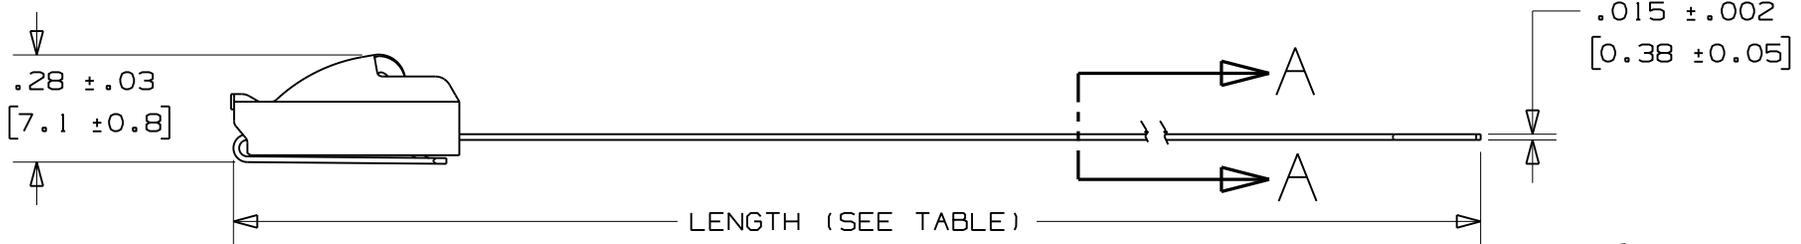


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NO. | MAX. BUNDLE DIA. | PACKAGE QTY. | LENGTH +/- .3" [7] |
|------------------|------------------|--------------|----------------------|
| MLT4DEH-Q316 | 4" [102] | 25 | 29.5" [749] |
| MLT6DEH-Q316 | 6" [152] | 25 | 41.5" [1054] |
| MLT8DEH-Q316 | 8" [203] | 25 | 53.5" [1359] |

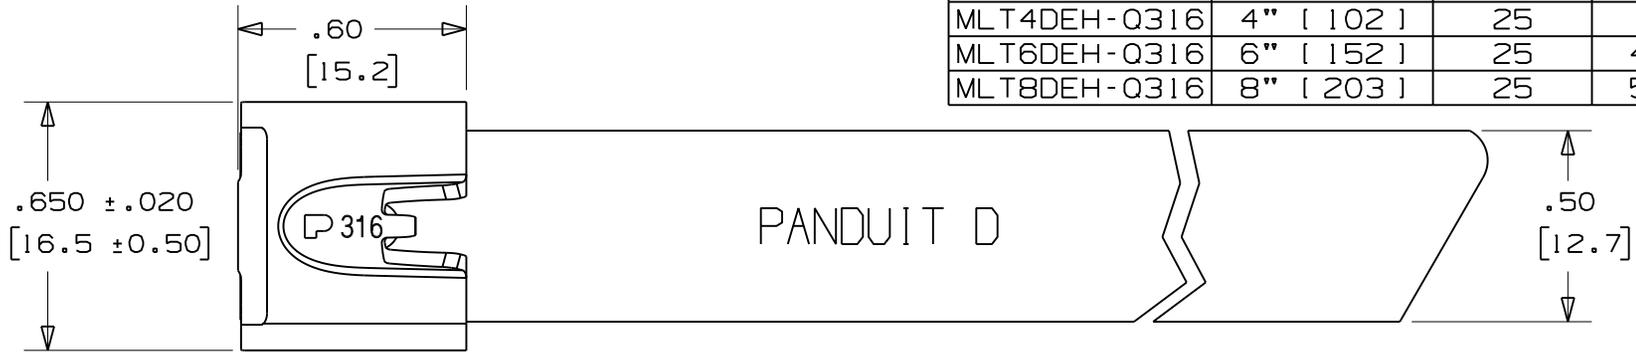


NOTES:

1. APPLICATION TOOLS - ST3MT & RT2HT
2. MINIMUM LOOP TENSILE STRENGTH - 800 LBS. (3560 NEWTONS) WHEN TESTED ON A 3" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL



SECTION A - A
SCALE: 4x

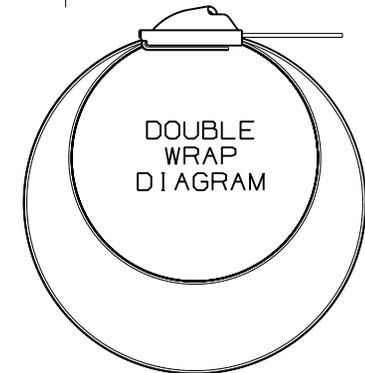

BODY WRAPS AROUND TWO TIMES
ENTERING HEAD TWICE
(NOT TO SCALE)

N41160BS_DC/01A

| | | | | | | | | | | | | | |
|-----|-------|------|-----|--|--|--|--|-----|------|--|--------------|-------------|----------------------------|
| | | | | | | | TINLEY PARK, ILLINOIS METAL LOCKING TIE EXTRA HEAVY DUTY 316 STAINLESS STEEL - DOUBLE WRAP CUSTOMER DRAWING | | | | | | |
| 01A | 10/08 | JAMB | SKB | | | | | | | ORIG CAD FILE SPEC WAS S41160_01 NOTE 1: APPLICATION TOOL RTIHT REPLACED BY RT2HT | | | |
| 01 | 8/04 | JAMB | DPN | (A) REMOVED "AISI NO.1 FULL RADIUS" & REPLACED WITH "FULLY ROUNDED" | | | 11907 | CCH | JJB | | | | |
| 00 | 1/04 | JAMB | DPN | RELEASED | | | 11307 | CCH | JJB | | | | |
| REV | DATE | BY | CHK | DESCRIPTION | | | ECN # | PM | CUST | DRAWN BY JAMB | CHK'D DPN | SCALE 2x | DRAWING NO. N41160BS_DC |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[MLT4DEH-Q316](#) [MLT6DEH-Q316](#) [MLT8DEH-Q316](#)