
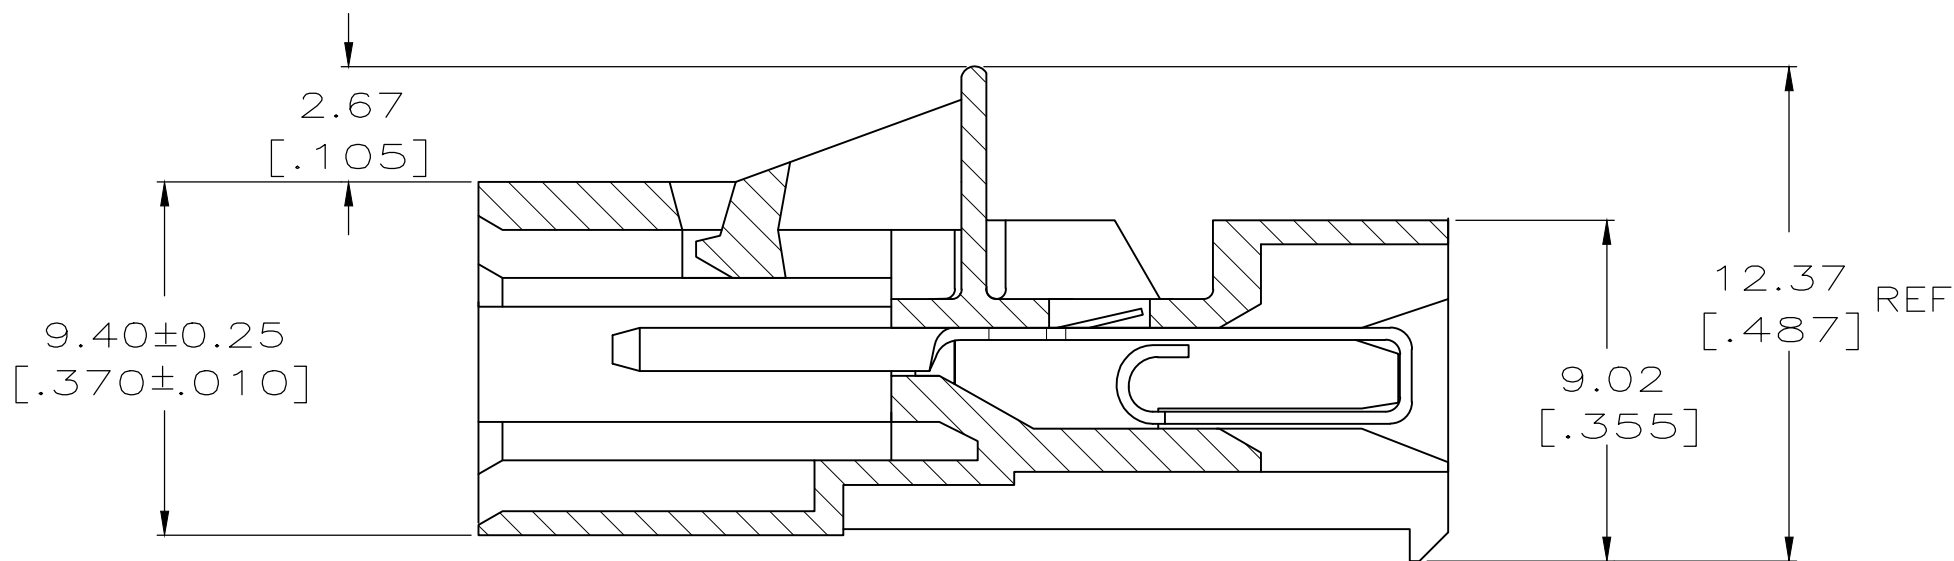
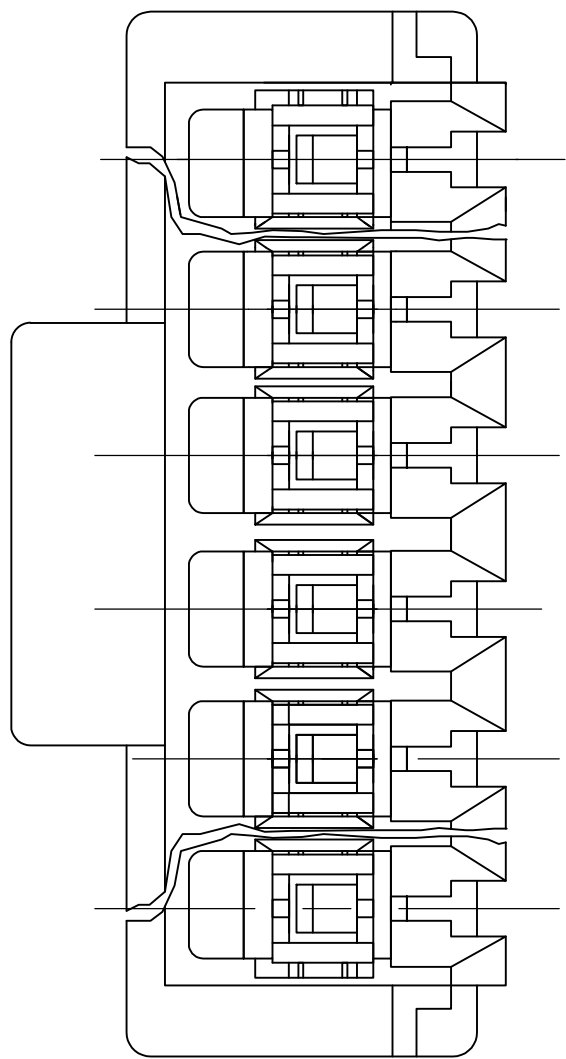
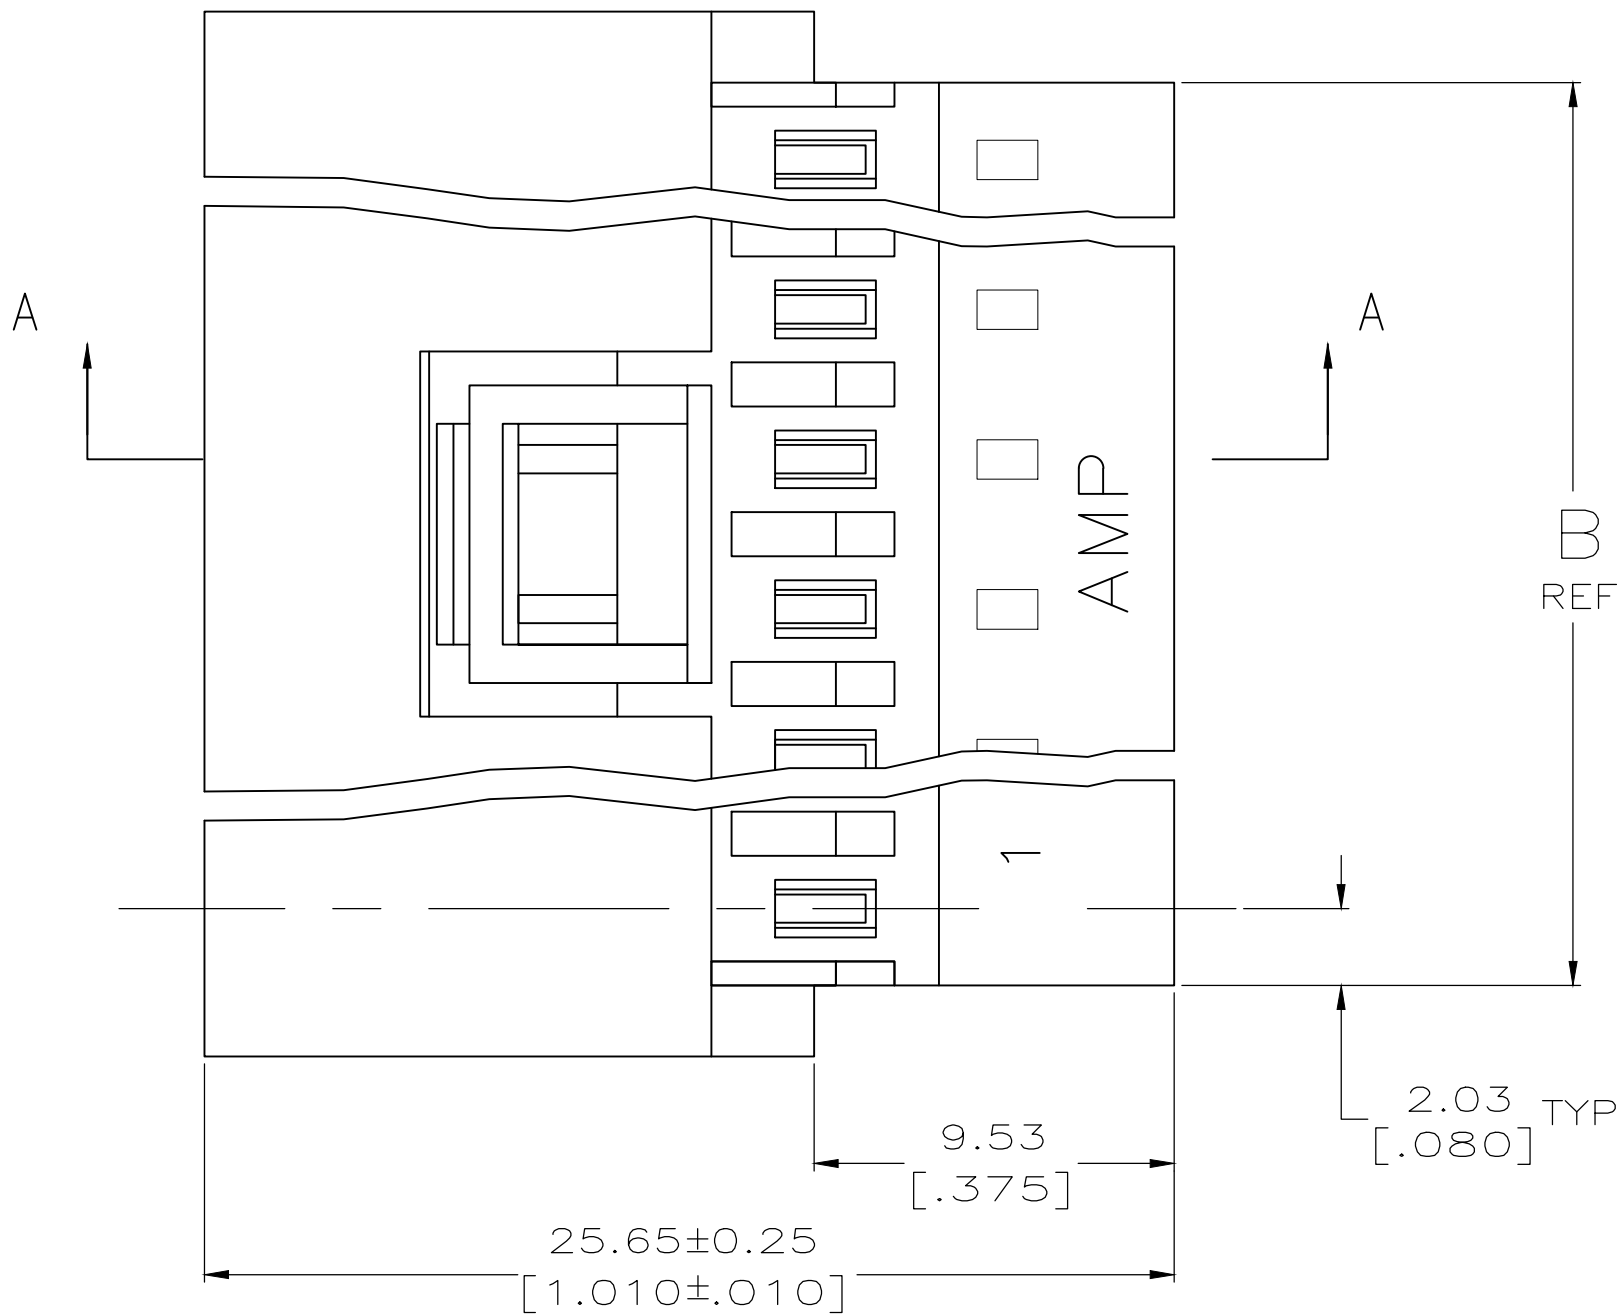


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		F1	ECO-14-012257	05NOV2014	KR	OC

- 1 MATERIAL: CONNECTOR- NYLON UL94V-2 (ORANGE).
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00038 [.000015] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH
OVER 0.00030 [.000012] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION,
ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
OR
CONTACTS - 0.30 [.012] THK COPPER ALLOY
(PLATED 0.00038 [.000015] MIN GOLD OR 0.00008 [.000003] MIN GOLD FLASH
OVER 0.00030 [.000012] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION,
ON POST END, WITH MATTE TIN 0.00203 [.000080] MIN THK ON WIRE END)
- 2 CONTACTS ACCEPT #18 AWG SOLID, FUSED STRANDED OR
STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- 3 BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- 4 HOUSING FEATURES: CLOSED END.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

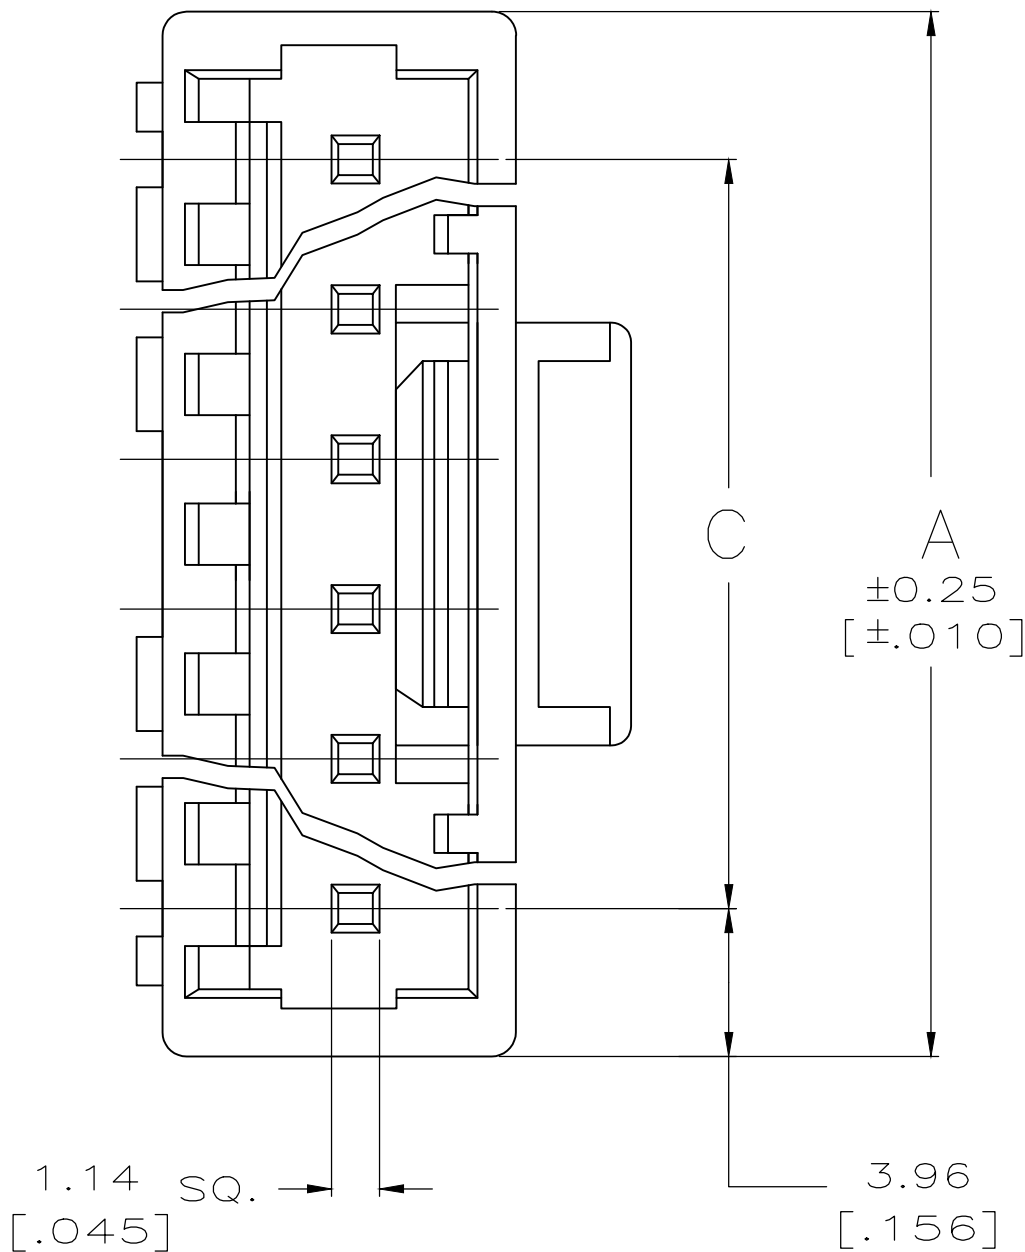

SECTION A-A

6 SUPERCEDED	6 SUPERCEDED	TIN	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
6 SUPERCEDED	6 SUPERCEDED	TIN	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
6 SUPERCEDED	6 SUPERCEDED	TIN	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]	4	3-647476-4
			7.92 [.312]	11.99 [.472]	15.85 [.624]	3	3-647476-3
			3.96 [.156]	8.03 [.316]	11.89 [.468]	2	3-647476-2
			55.47 [2.184]	59.54 [2.344]	63.40 [2.496]	15	4-647476-5
			43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
6 SUPERCEDED	6 SUPERCEDED	TIN-LEAD	43.59 [1.716]	47.65 [1.876]	51.51 [2.028]	12	4-647476-2
			31.70 [1.248]	35.76 [1.408]	39.62 [1.560]	9	3-647476-9
			19.81 [.780]	23.88 [.940]	27.74 [1.092]	6	3-647476-6
			11.89 [.468]	15.95 [.628]	19.81 [.780]		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-647476-4](#)