
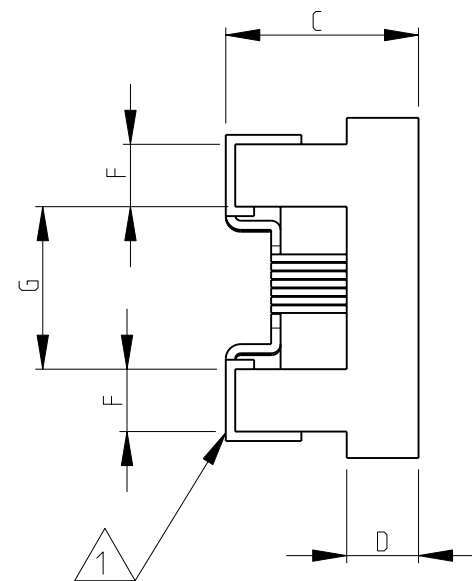


- 1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS
- 2 AVAILABLE IN 2 DIFFERENT SERIES
- 3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

Technical drawing of a rectangular plate. The drawing shows a side view of the plate with a central horizontal slot. The overall height of the plate is labeled 'A' with a vertical dimension line. The overall width of the plate is labeled 'B' with a horizontal dimension line. The central slot is defined by two horizontal lines, and the plate has a uniform thickness.



RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASH.M 14-NOV-08		 TE Connectivity	
DIMENSIONS: mm		CHK PRAKASH.S 14-NOV-08			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEPHEN.P 14-NOV-08		NAME LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650	
		PRODUCT SPEC -			
0 PLC ± 0.2 1 PLC ± 0.1 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 5°		APPLICATION SPEC -		SIZE A 3	
MATERIAL -		FINISH -		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C= 1624112	
CUSTOMER DRAWING				RESTRICTED TO -	
				SCALE 20:1	
				SHEET 1 OF 1	
				REV BA1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36501J5N1JTDG](#)