
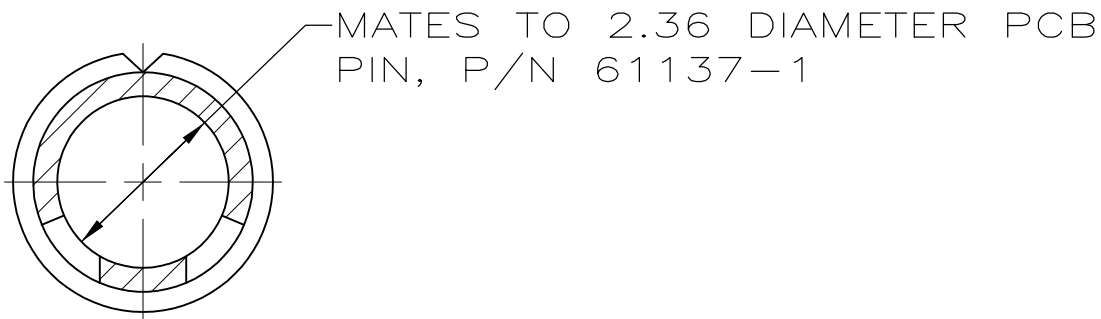


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	52		L2	REVISED PER ECO-11-004917	11MAR11	RK



APVD	HMR
------	-----

1. WIRE RANGE: 0.3 - 0.9 MM² (22 - 18 AWG)
2. INSULATION RANGE: 1.52 - 2.79
- 3


 REVERSE REEL OF PART NUMBER 61291-5.

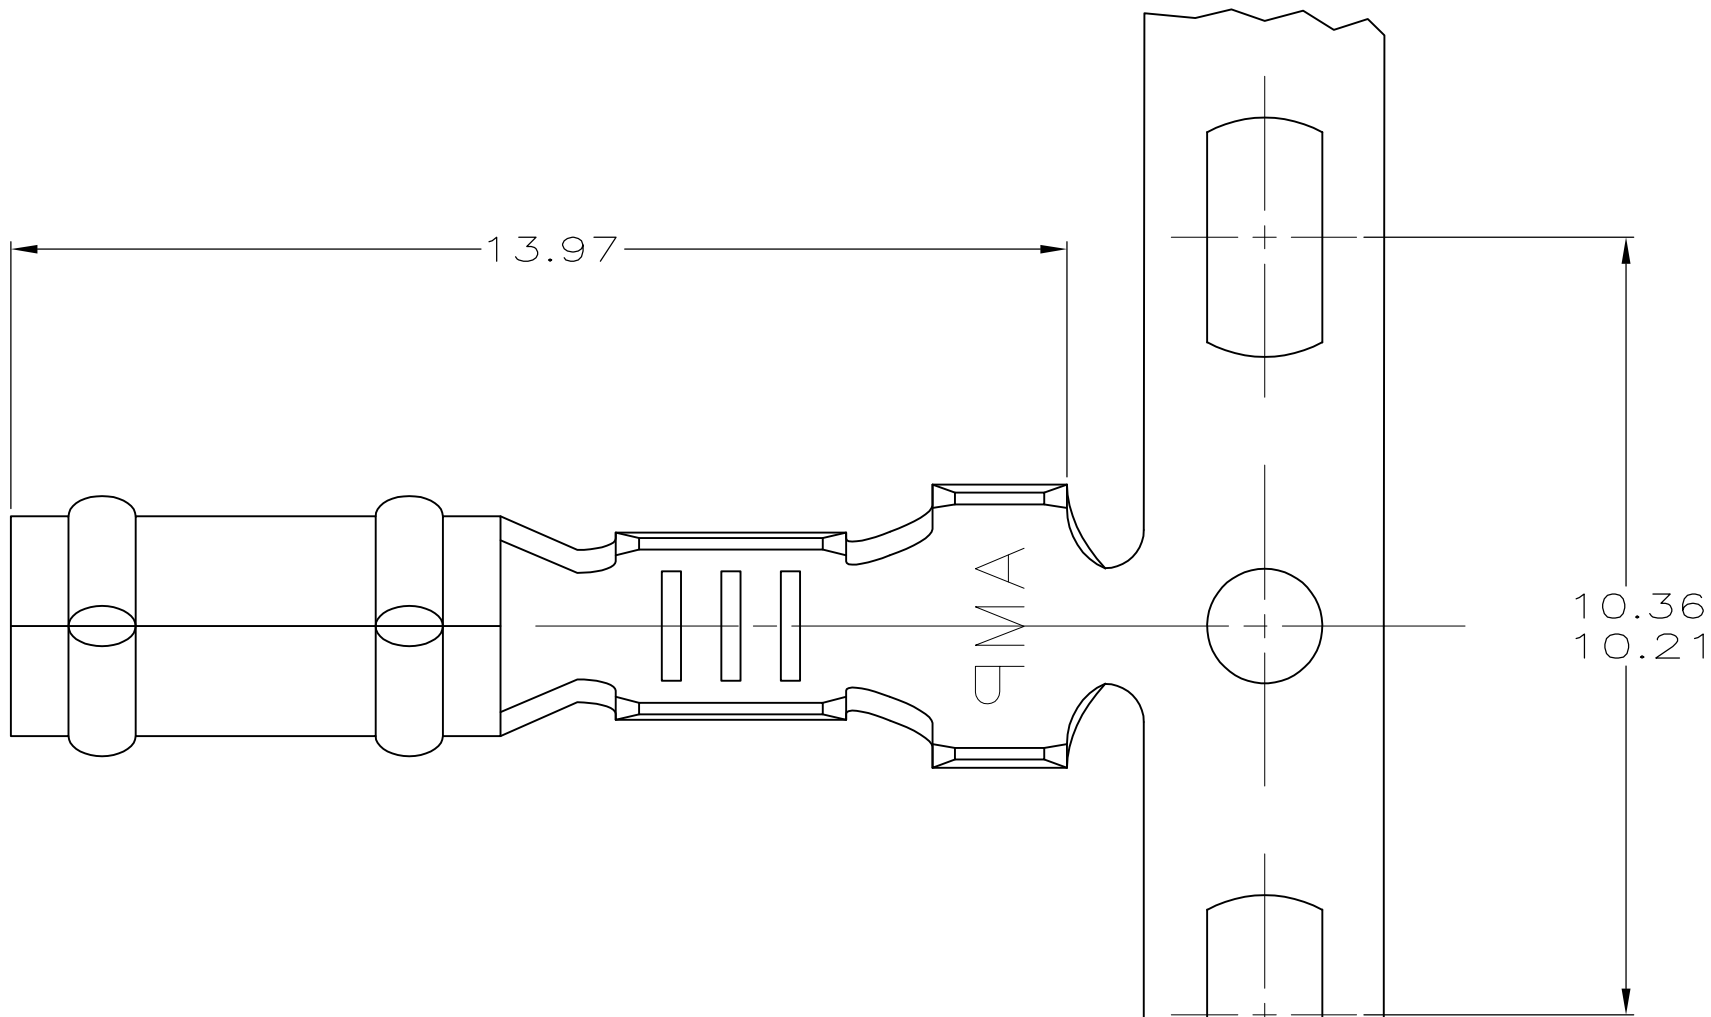

SECTION A-A

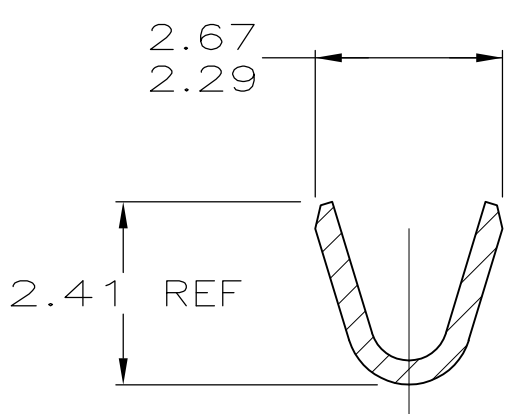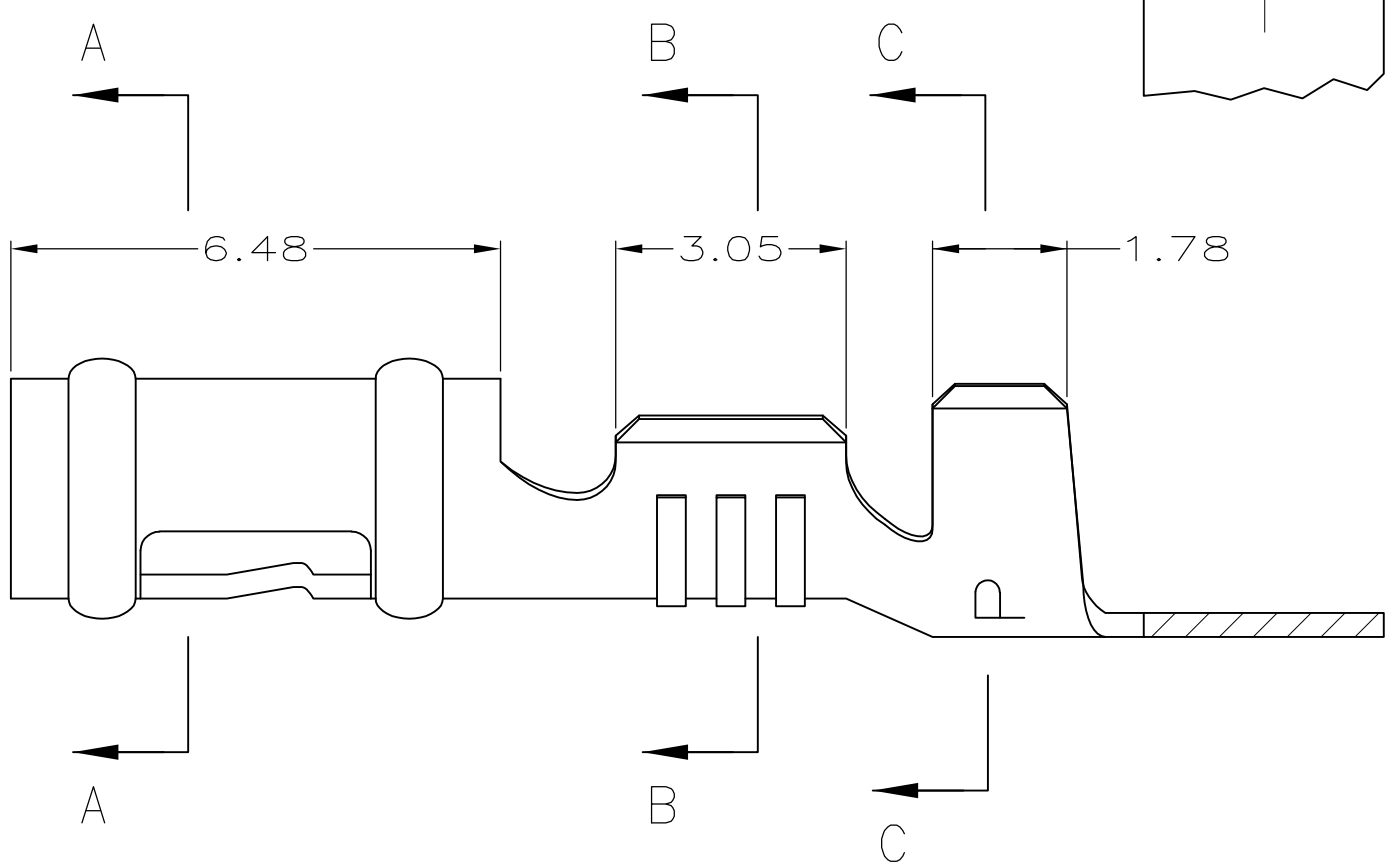

SECTION B-B

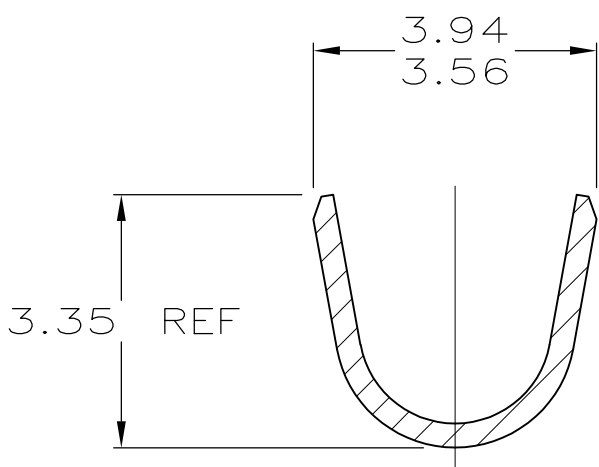


SECTION C-C

61291-5
61291-1
PART NUMBER

2.29	.090	3.05	.120	10.21	.402	-	-
1.78	.070	2.79	.110	6.48	.255	-	-
1.52	.060	2.67	.105	3.94	.155	-	-
0.32	.013	2.41	.095	3.56	.140	13.97	.550
0.13	.005	2.36	.093	3.35	.132	10.36	.408
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

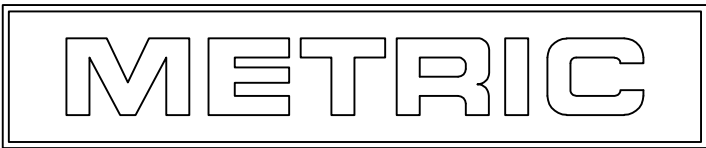

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. BECK 6-16-97	TE Connectivity			
DIMENSIONS: mm		CHK R. SWING 6-16-97				
		APVD A. BEDDICK 8-22-97	NAME			
		PRODUCT SPEC 108-1025	RECEPTACLE, .093 DIAMETER, 22-18 AWG, .060-.110 INSULATION, P.C. CONTACT			
MATERIAL 0.32 PH BRZ		APPLICATION SPEC 114-1008	SIZE A2	CAGE CODE 00779	DRAWING NO C-61291	RESTRICTED TO -
FINISH PRE TIN		WEIGHT -	CUSTOMER DRAWING		SCALE 10:1	SHEET 1 of 1
					REV L2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[612911](#)