


FILE

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	UPDATED TO STANDARD	7/11/97	VPS

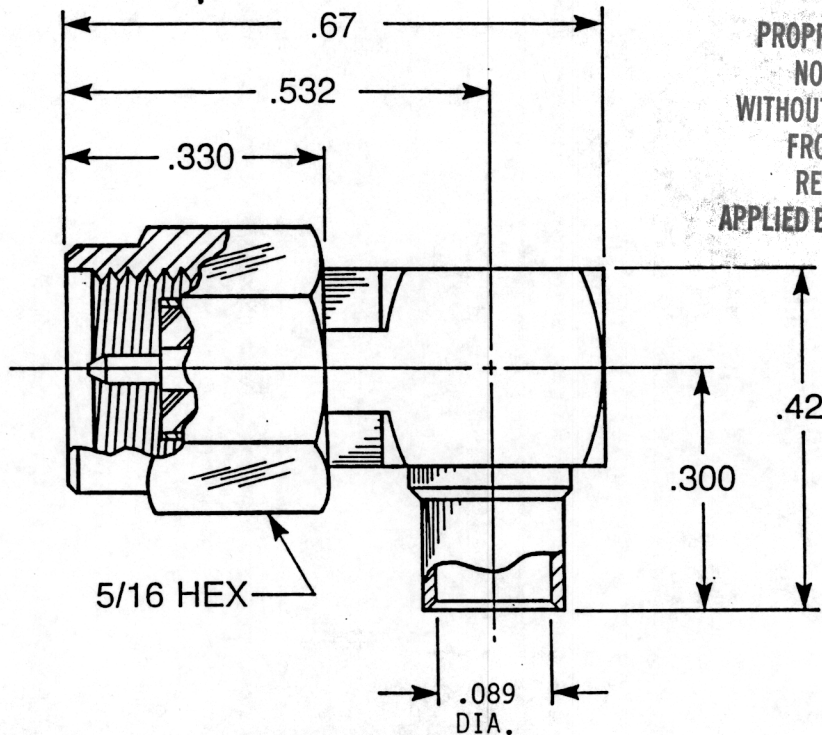

NOTES: CONFORMS TO MIL-PRF-39012

MATERIAL:

1. BODIES & COUPLING NUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. CONTACT & SNAP RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. INSULATOR = TEFLON, VIRGIN WHITE, ASTM D1710, GRADE 1, TYPE I, CLASS "A".
4. CAP = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
5. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

1. BODIES = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS O, GRADE C OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
3. CAP = GOLD PLATE PER MIL-G-45204 TYPE II, CLASS I, GRADE C OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.
4. COUPLING NUT = PASSIVATE PER QQ-P-35, TYPE VI.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. 1/64 DECIMAL ANGLES ± 2°			DRAWN VPS		DATE 7-11-97		APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Drive, P.O. Box 510 New Haven, CT 06513	
			CHECKED T.D.		DATE 7-11-97			
MATERIAL:			APPROVED <i>[Signature]</i>		DATE 7/14/97		SMA RIGHT ANGLE CABLE PLUG, RG-405 CONTROL DRAWING	
			FINISH:					
			SIZE A	CODE IDENT NO. 19505	9443-1563-010			
			SCALE NTS	REV A	SHEET 1 OF 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[9443-1563-010](#)