


Applications

- General Purpose
- For IF applications

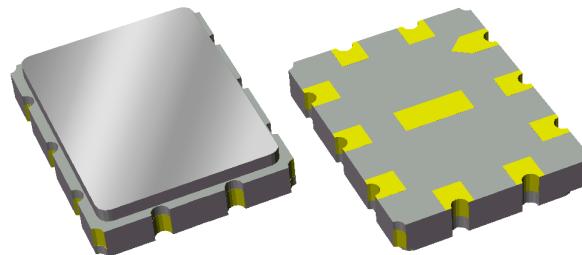

Product Features

- Typical 3dB Bandwidth of 57.0 MHz
- Low loss
- High attenuation
- Single-ended operation
- Replaces P/N 851947 (BW 3dB=56 MHz)
- Ceramic Surface Mount Package (SMP)
- Small Size
- Dimensions: 9.0 x 7.0 x 1.5mm
- Hermetically Sealed
- RoHS compliant, Pb-free



General Description


The 856074 is a high-performance IF SAW filter with a center frequency of 140 MHz and a 3 dB bandwidth of 57.0 MHz.

It features low loss with excellent attenuation, and is designed to be used with a single ended input and output.

The device is RoHS compliant and Pb-free.

Functional Block Diagram

Top view

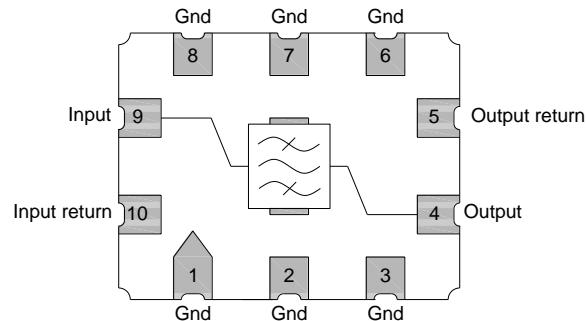

Pin Configuration

Pin # SE	Description
9	Input
10	Input Return
4	Output
5	Output Return
1,2,3,6,7,8	Case Ground

Ordering Information

Part No.	Description
856074	packaged part
856074-EVB	evaluation board

Standard T/R size = 2000 units/reel.

Specifications

Electrical Specifications ⁽¹⁾

Specified Temperature Range: ⁽²⁾ 0 to +70 °C

Parameter ⁽³⁾	Conditions	Min	Typical ⁽⁴⁾	Max	Units
Center Frequency		-	140	-	MHz
Minimum Insertion Loss		-	18.65	19.5	dB
Lower 1dB Band Edge ⁽⁵⁾		-	112.7	115.75	MHz
Upper 1dB Band Edge ⁽⁵⁾		164.25	166.1	-	MHz
Lower 3dB Band Edge ⁽⁵⁾		-	111.4	112.8	MHz
Upper 3dB Band Edge ⁽⁵⁾		167.2	168.4	-	MHz
Lower 40dB Band Edge ⁽⁵⁾		102.2	106.3	-	MHz
Upper 40dB Band Edge ⁽⁵⁾		-	176.4	177.8	MHz
Amplitude Variation	115.75 – 164.25 MHz	-	0.60	1.15	dB p-p
Phase Linearity	115.75 – 164.25 MHz	-	4.07	7.75	deg p-p
Group Delay Variation	115.75 – 164.25 MHz	-	31	60	ns p-p
Group Delay	115.75 – 164.25 MHz	-	0.531	-	μs
Relative Attenuation ⁽⁵⁾	10 – 27.5 MHz	49	58	-	dB
	27.5 – 102 MHz	39	42	-	dB
	178 – 252.5 MHz	37	42	-	dB
	252.5 – 300 MHz	36	44	-	dB
Source Impedance (single-ended) ⁽⁶⁾		-	50	-	Ω
Load Impedance (single-ended) ⁽⁶⁾		-	50	-	Ω
Temperature Coefficient of Frequency		-	-74	-	ppm/ °C

Notes:

1. All specifications are based on the TriQuint schematic for the main reference design shown on page 3
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature
5. Relative to minimum insertion loss
6. This is the optimum impedance in order to achieve the performance shown


Absolute Maximum Ratings

Parameter	Rating
Operating Temperature	0 to +70 °C
Storage Temperature	-40 to +85 °C

Operation of this device outside the parameter ranges given above may cause permanent damage.

Reference Design – 50Ω SE Input, 50Ω SE Output


Schematic

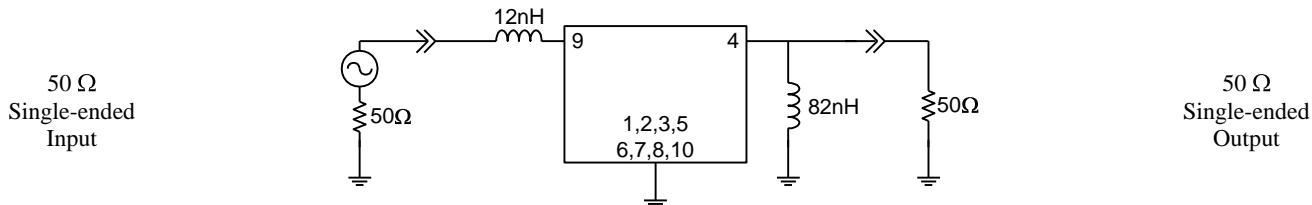

Notes:

1. Actual matching values may vary due to PCB layout and parasitics


PC Board

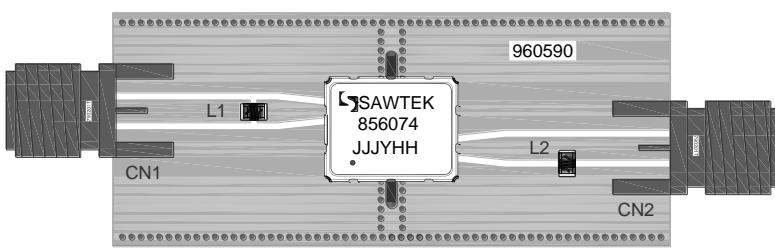

Notes:

Top, middle & bottom layers: 1 oz copper
 Substrates: FR4 dielectric, .031" thick
 Finish plating: Nickel: 3-8µm thick, Gold: .03-.2µm thick
 Hole plating: Copper min .0008µm thick

Mounting Configuration

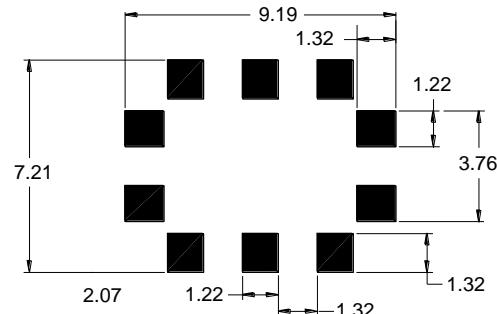







Notes:

1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.

Bill of Material


Reference Desg.	Value	Description	Manufacturer	Part Number
L1	12nH	Coil Wire-wound, 0603, 5%	MuRata	LQW18AN12NJ10
L2	82nH	Coil Wire-wound, 0603, 5%	MuRata	LQW18AN82NJ10
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960590

Typical Performance (at room temperature)

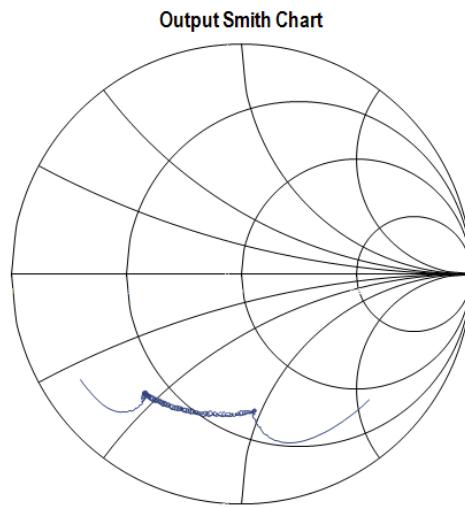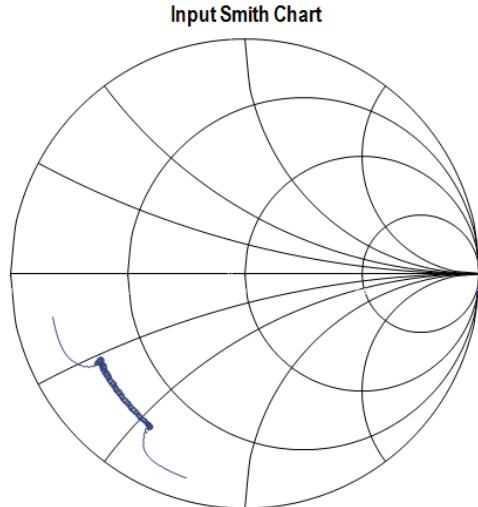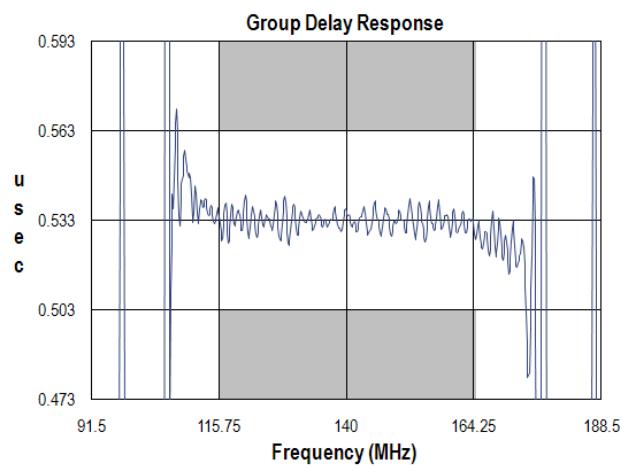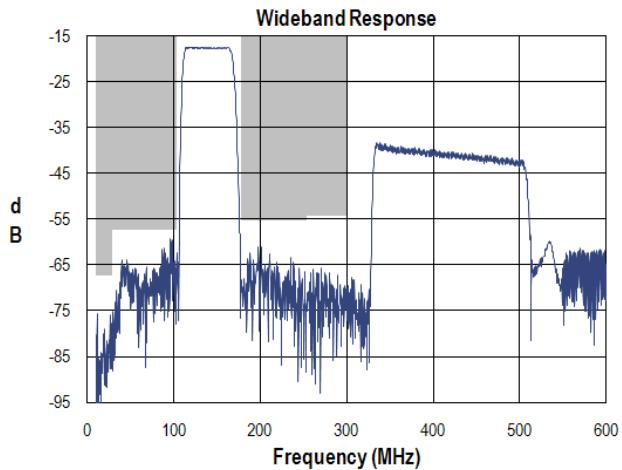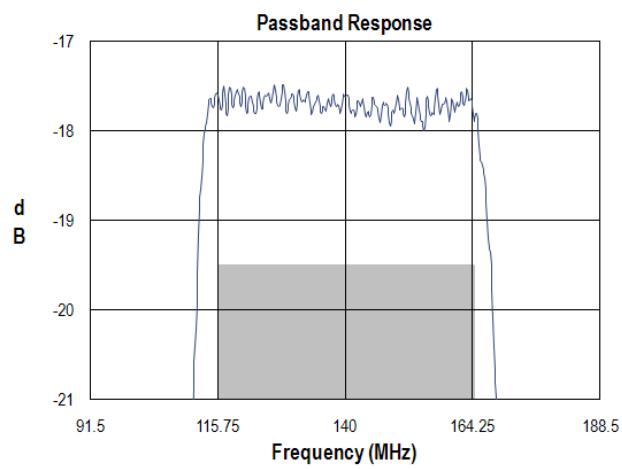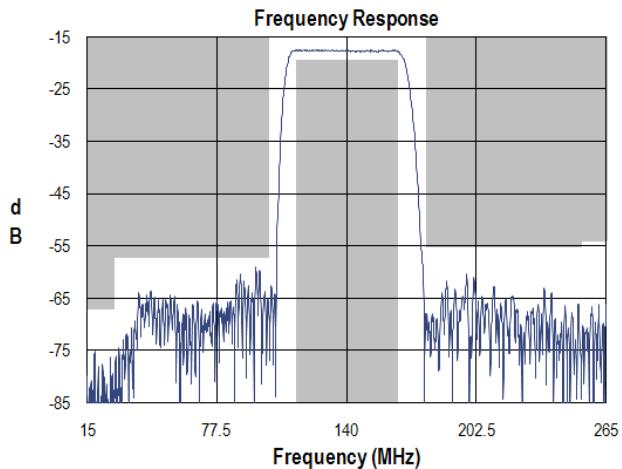

Mechanical Information

Package Information, Dimensions and Marking

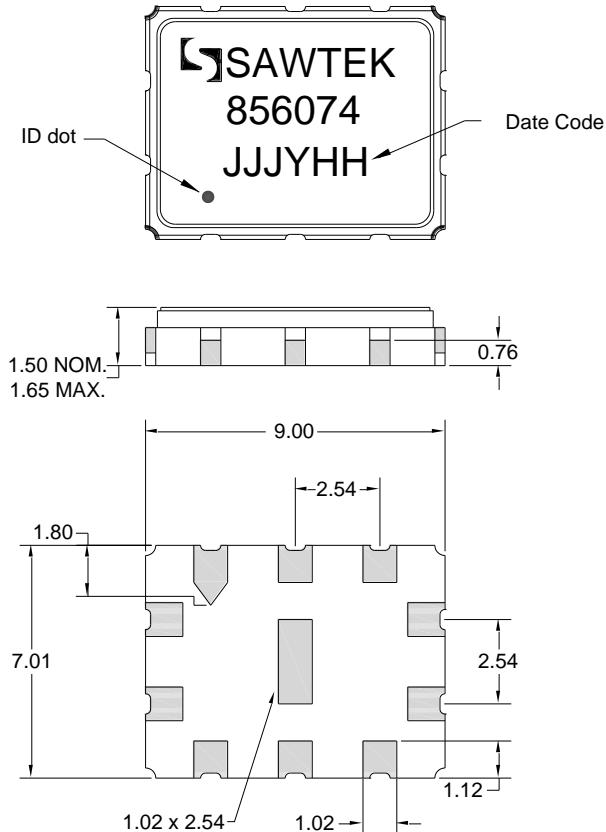

Package Style: SMP-35B
Dimensions: 9.00 x 7.01 x 1.50 mm


Body: Al_2O_3 ceramic
Lid: Kovar, Ni plated
Terminations: Au plating 0.5 - 1.0 μm , over a 2-6 μm Ni plating

All dimensions shown are nominal in millimeters
All tolerances are $\pm 0.15\text{mm}$ except overall length and width
 $\pm 0.10\text{mm}$

The date code consists of: day of the current year (Julian, 3 digits), last digit of the year (1 digit) and hour (2 digits)

Tape and Reel Information

Standard T/R size = 2000 units/reel. All dimensions are in millimeters

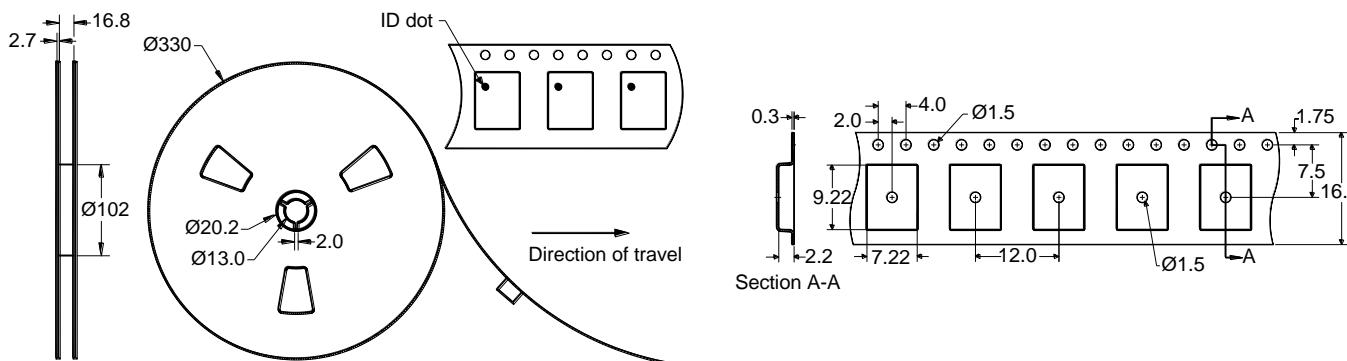

Product Compliance Information

ESD Information



Caution! ESD-Sensitive Device

ESD Rating: 1B

Value: Passes ≥ 650 V min.
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

ESD Rating: B

Value: Passes ≥ 300 V min.
Test: Machine Model (MM)
Standard: JEDEC Standard JESD22-A115

MSL Rating

Devices are Hermetic, therefore MSL is not applicable.

Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($C_{15}H_{12}Br_4O_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@tqs.com

Tel: +1.407.886.8860
Fax: +1.407.886.7061

For technical questions and application information:

Email: applications.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Qorvo](#):

[856074](#) [856074-EVB](#)