
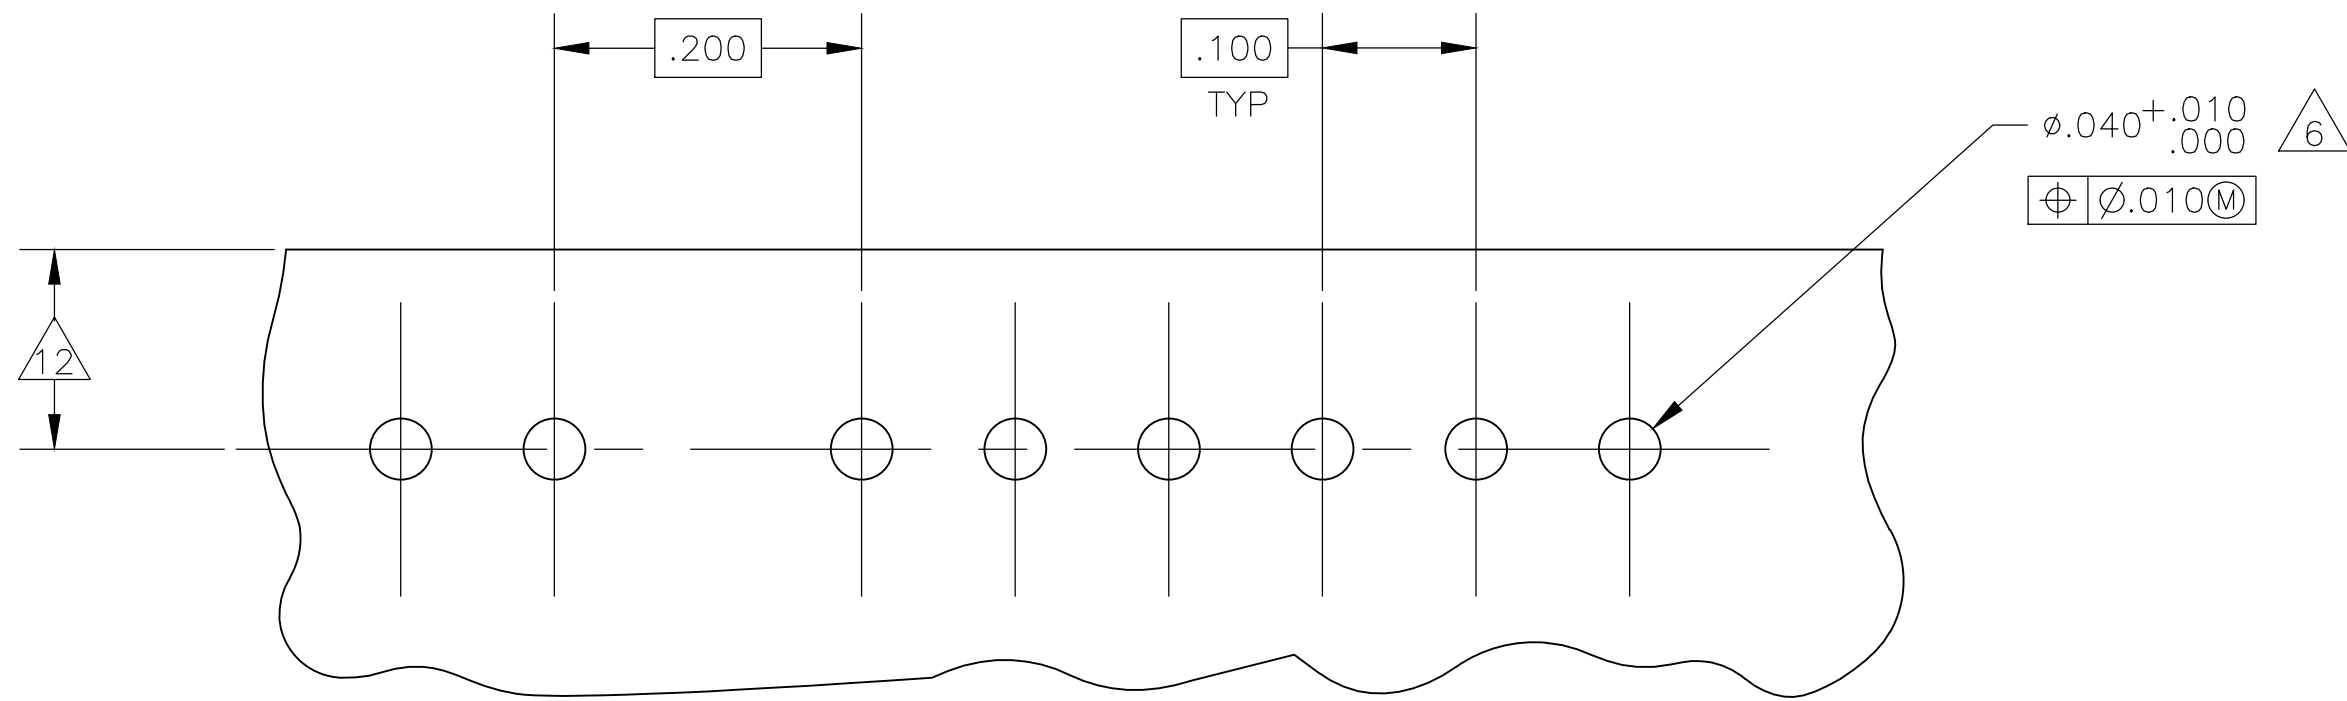
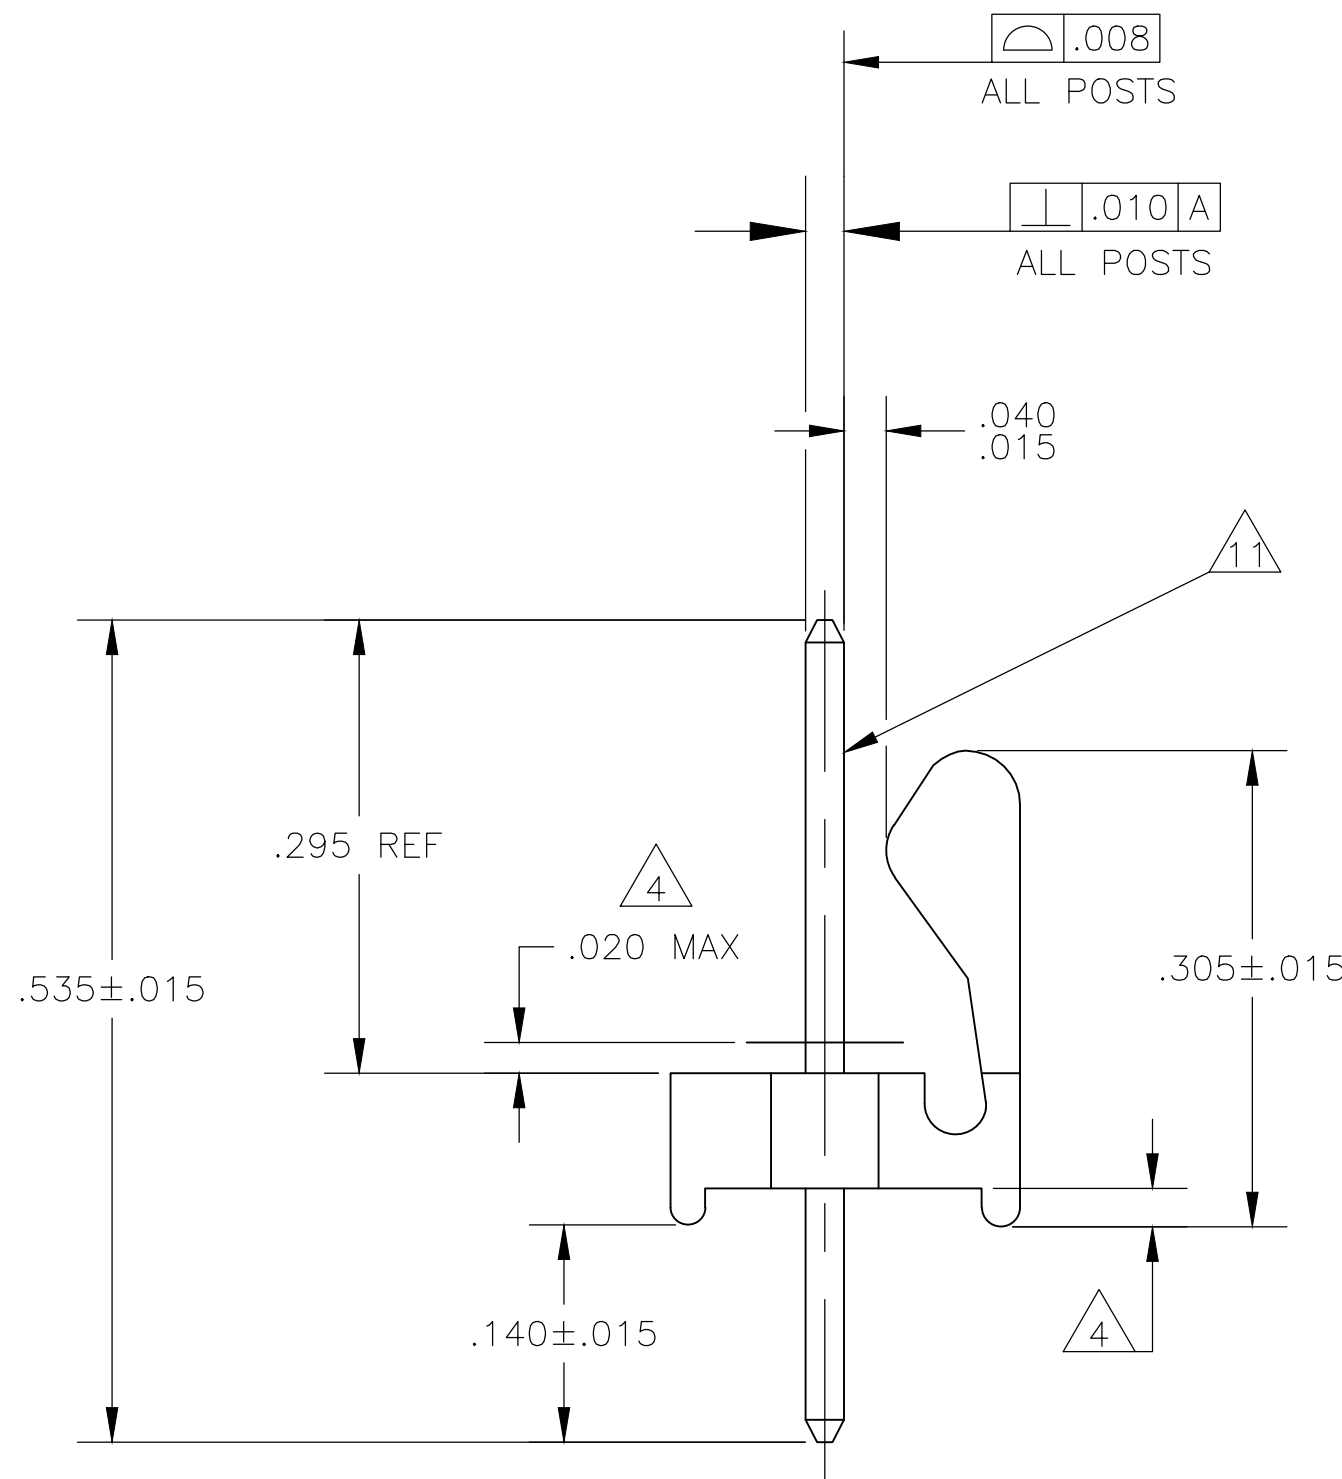
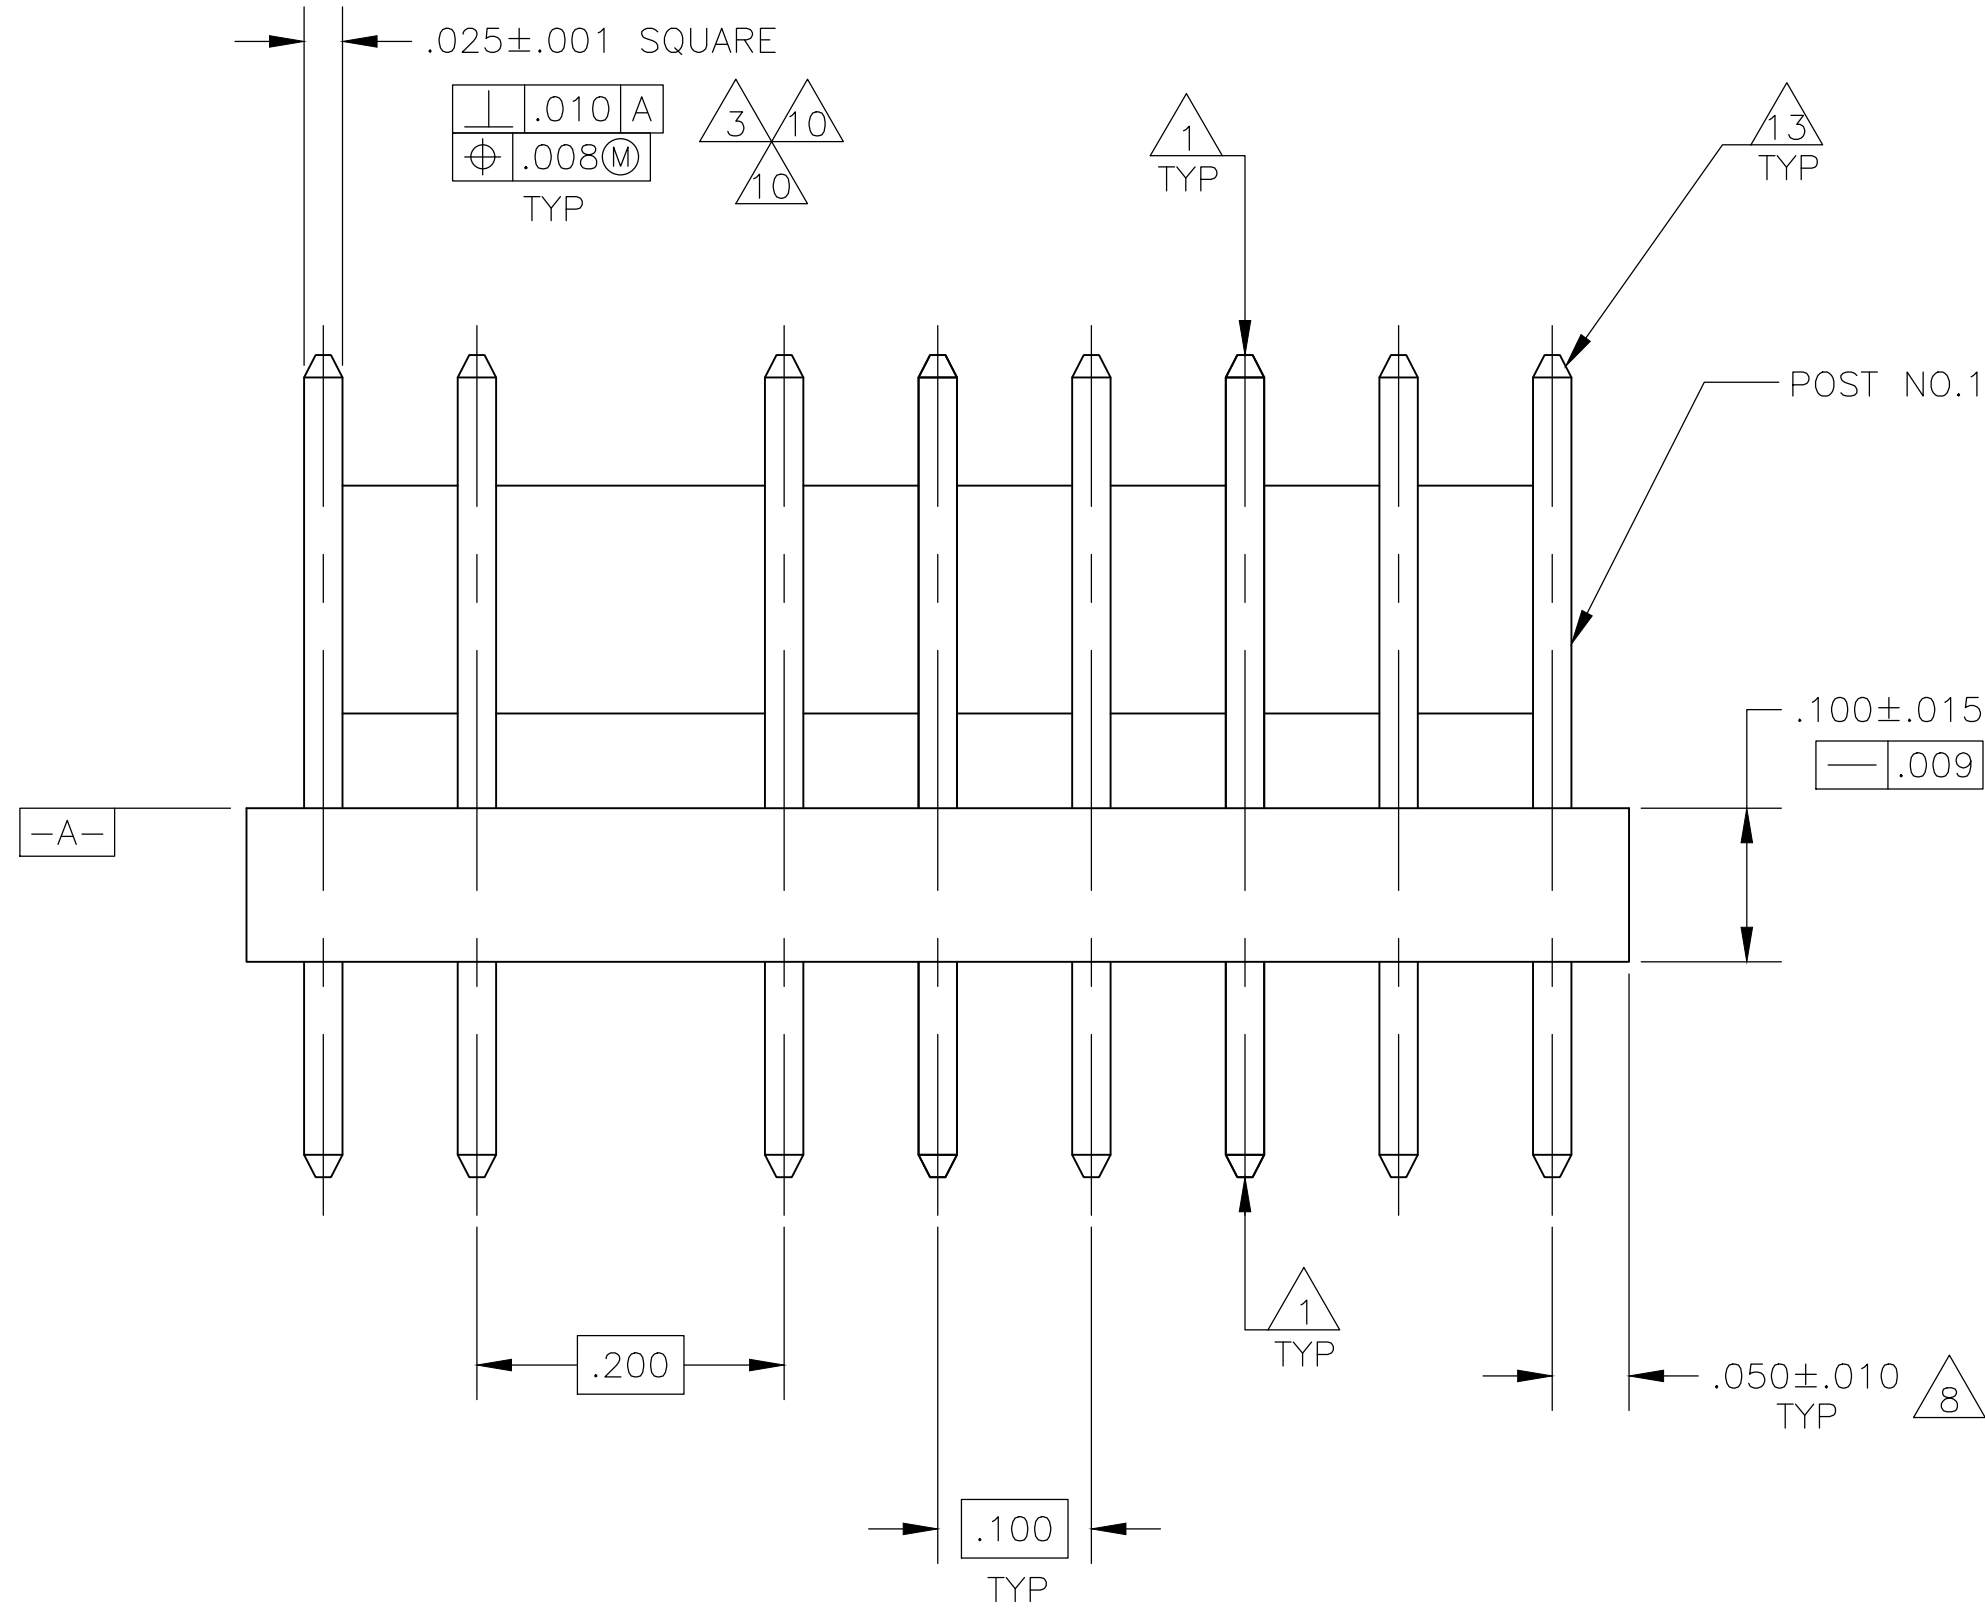


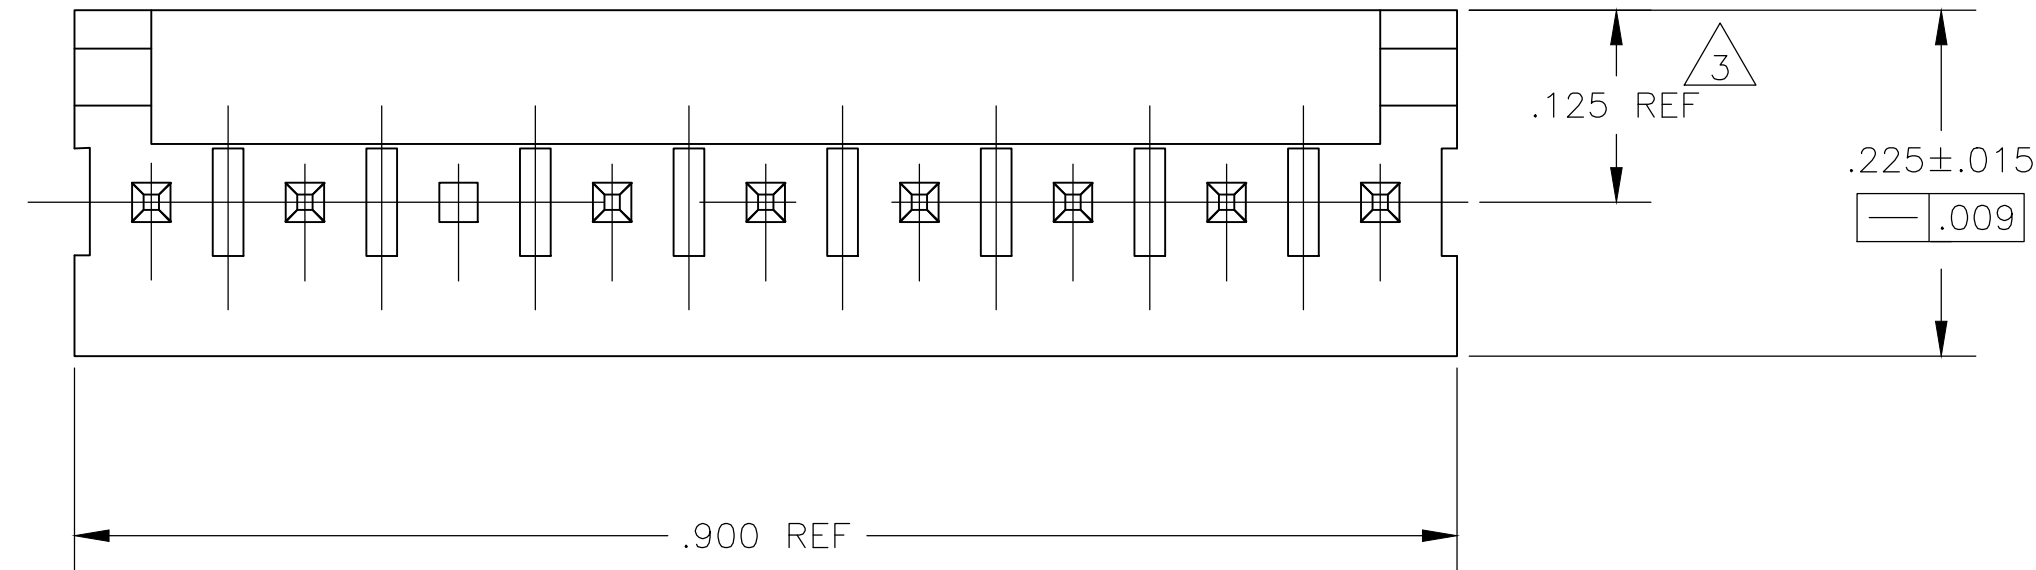

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THICK P.C. BOARD

1. POST TO WITHSTAND 13 NEWTONS (3 LBS.) MIN. AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
2. TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
3. MEASURED AT SURFACE -A-.
4. PLASTIC FLASH PERMITTED IN THIS AREA.
5. PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
6. ONE HOLE MAY BE UNDERSIZED (.032-.035 DIA.) FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
7. MATERIAL: HEADER-THERMOPLASTIC POLYESTER
UL94V-O (NATURAL)
POST-COPPER ALLOY (TIN PLATED)
8. COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
9. PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
10. POSTS TO BE MEASURED WHEN STRIP IS HELD FLAT.
11. POSTS MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
12. DIMENSION SHOULD BE .130 MIN WHEN MATING WITH A MTA 100 CONNECTOR ASSEMBLY OR CST 100 CONNECTOR.
13. PIN BURR OF .005 MAX. VERTICAL AND .003 MAX. HORIZONTAL PERMITTED AT POST TIPS ON BOTH ENDS.

.040	1.02		
.035	0.89	.900	22.86
.032	0.81	.535	13.59
.025	0.64	.310	7.87
.020	0.51	.295	7.49
.015	0.38	.225	5.72
.010	0.25	.200	5.08
.009	0.23	.140	3.56
.008	0.20	.130	3.30
.005	0.13	.125	3.18
.003	0.08	.100	2.54
.001	0.03	.063	1.60
.000	0.00	.050	1.27
IN	MM	IN	MM

CONVERSION TABLE

OBSOLETE	8	643265-9
	2,4,6,8	643265-8
	6	643265-7
	4	643265-5
OBSOLETE	2	643265-4
	3	643265-3
	7	643265-2
	POST NUMBER OMITTED	PART NUMBER

643265-2 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
L. SMITH
CHK
R. SWING
REV
R. SPEER
PRODUCT SPEC
APPLICATION SPEC
MATERIAL
7

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0. PLC ± -
1. PLC ± -
2. PLC ± -
3. PLC ± .005
4. PLC ± - ± 0°30'
FINISH
7

DATE
15APR93
NAME
MTA-100 HEADER ASSEMBLY, FRICTION LOCK, NOTCHED, .025 SQUARE STRAIGHT POST, TIN PLATED, 9 POSITION, OMITTED POST
SIZE
A1
CAGE CODE
00779
DRAWING NO
643265
RESTRICTED TO
-
CUSTOMER DRAWING
SCALE
8:1
SHEET
1 OF 1
REV
W3

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[643265-9](#)