



SRJ-SERIES



Suggested PCB Layout




Position Options




8 Position
10 Position
16 Position
(PCB Layout Differs)


Actuator Options



SRK-SERIES



Suggested PCB Layout




Position Options



10 Position
16 Position

Actuator Options



FEATURES:

- 3x2, 3x3, and 4x1 Pin Layouts
- Through Hole and Surface Mount Versions
- Washable
- Superior Quality


SPECIFICATIONS:

RATING: 100mA 5VDC (Switching)
100mA 50VDC (Non-Switching)
TEMPERATURE: -10°C to 60°C (Operating)
-40°C to 85°C (Storage)
OPERATING FORCE: 400gf·cm
ELECTRICAL LIFE: 15,000 Cycles
CONTACT RESISTANCE: 100mΩ Max.
INSULATION RESISTANCE: 100MΩ at 250VDC
DIELECTRIC STRENGTH: 250VAC for 1 Minute


MATERIALS:

BASE: Polyphenylene Sulfide (PPS)
HOUSING: Polyphenylene Sulfide (PPS)
ACTUATOR: Polyacetal
O-RING: NBR
CONTACT: Glass Fabric Epoxy Resin
Gold Over Nickel Plated
TERMINALS: Gold Over Nickel Plated Bronze
Tin Over Nickel Plated Bronze

SRM-SERIES

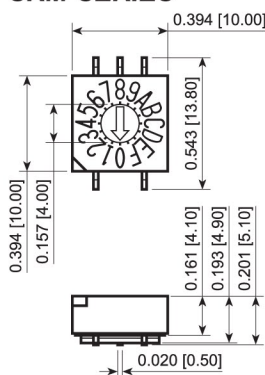

Suggested PCB Layout

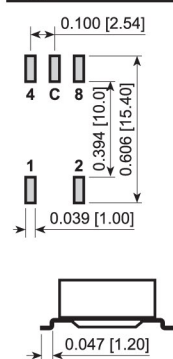


Position Options




10 Position
16 Position

SRT-SERIES

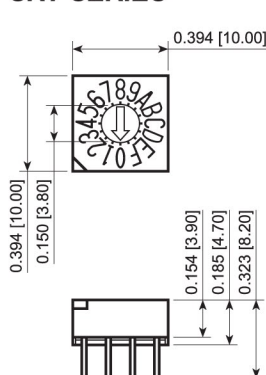

Suggested PCB Layout





Position Options



10 Position
16 Position

Right Angle Option



SRJ-8
SRJ-10HC



SRT-10

EXAMPLE PART NUMBERS:

SRJ-10	10 Position 2x3, Through Hole, Flush, Real Code
SRJ-16	16 Position 2x3, Through Hole, Flush, Real Code
SRK-10	10 Position 3x3, Through Hole, Flush, Real Code
SRK-10C	10 Position 3x3, Through Hole, Flush, Comp. Code
SRK-10H	10 Position 3x3, Through Hole, Raised, Real Code
SRK-16	16 Position 3x3, Through Hole, Flush, Real Code
SRK-16C	16 Position 3x3, Through Hole, Flush, Comp. Code
SRK-16H	16 Position 3x3, Through Hole, Raised, Real Code
SRK-16HC	16 Position 3x3, Through Hole, Raised, Comp. Code
SRM-10	10 Position 3x3, SMT, Flush Actuator, Real Code
SRM-10C	10 Position 3x3, SMT, Flush Actuator, Comp. Code
SRM-16	16 Position 3x3, SMT, Flush Actuator, Real Code
SRM-16C	16 Position 3x3, SMT, Flush Actuator, Comp. Code
SRT-10	10 Position 4x1, Through Hole, Flush, Real Code

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Series	Number of Positions	Actuator Options	Right Angle Option	Encoding Options	Tape Sealing	Packaging Options
SRJ - 2x3, Through Hole	8	For SRJ and SRK Series: None - Flush H - Extended	For SRJ, SRK, and SRM Series: None - Vertical	None - Real C - Complementary	For SRJ, SRK, and SRT Series: None - No Tape T - Taped	For SRJ, SRK, and SRT Series: None - Tube TR - Tape and Reel
SRK - 3x3, Through Hole	10	For SRK Series: 10	For SRM and SRT Series: None - Vertical R - Right Angle			
SRM - 2x3, SMT	16	For SRM and SRT Series: 10				
SRT - 4x1, Through Hole						



E-SWITCH®

www.e-switch.com

800.867.2717

DIP

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[SRJ-16C](#) [SRJ-16](#) [SRK-10](#) [SRM-10](#) [SRK-10C](#) [SRJ-8H](#) [SRJ-10](#) [SRJ-10H](#)