
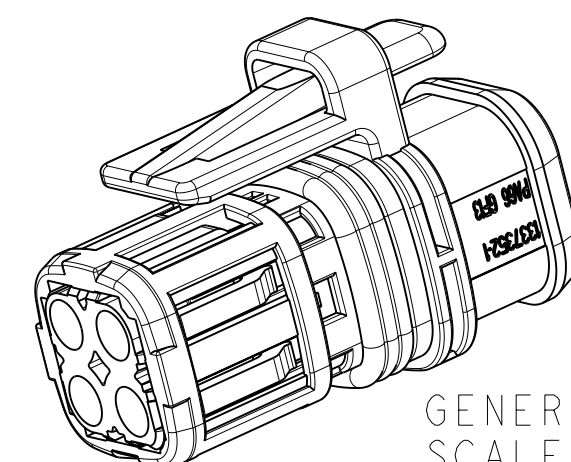
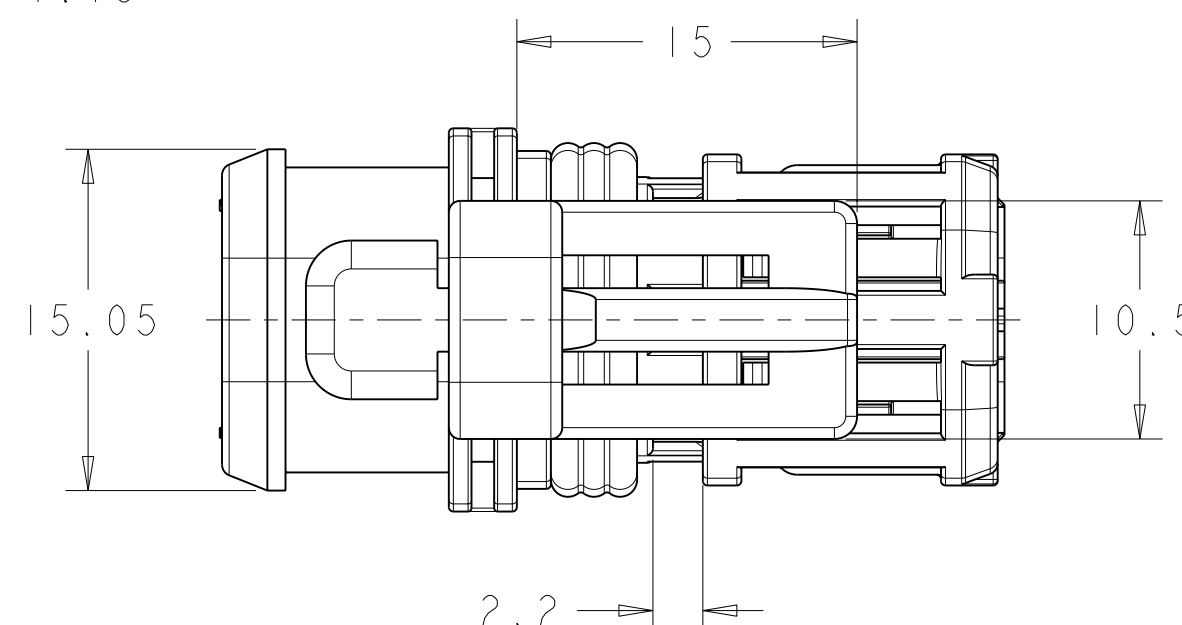
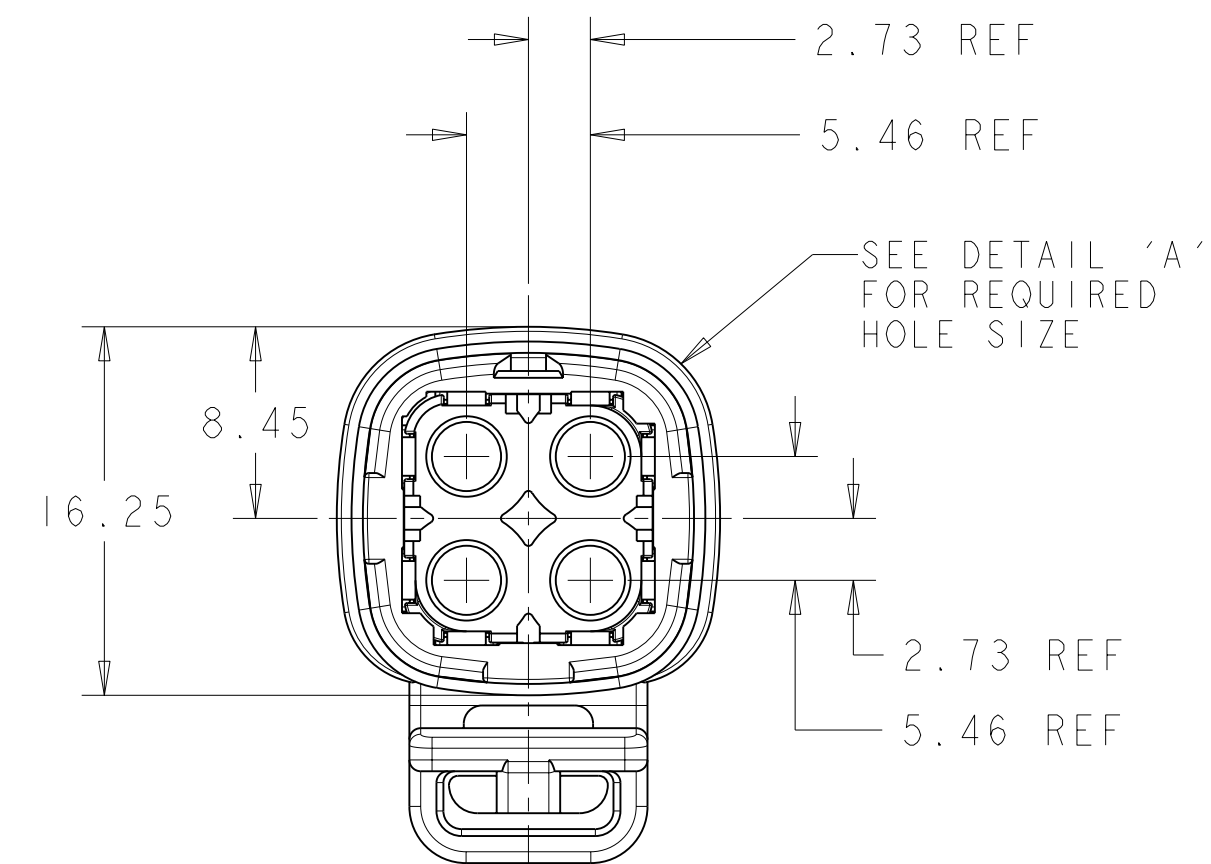
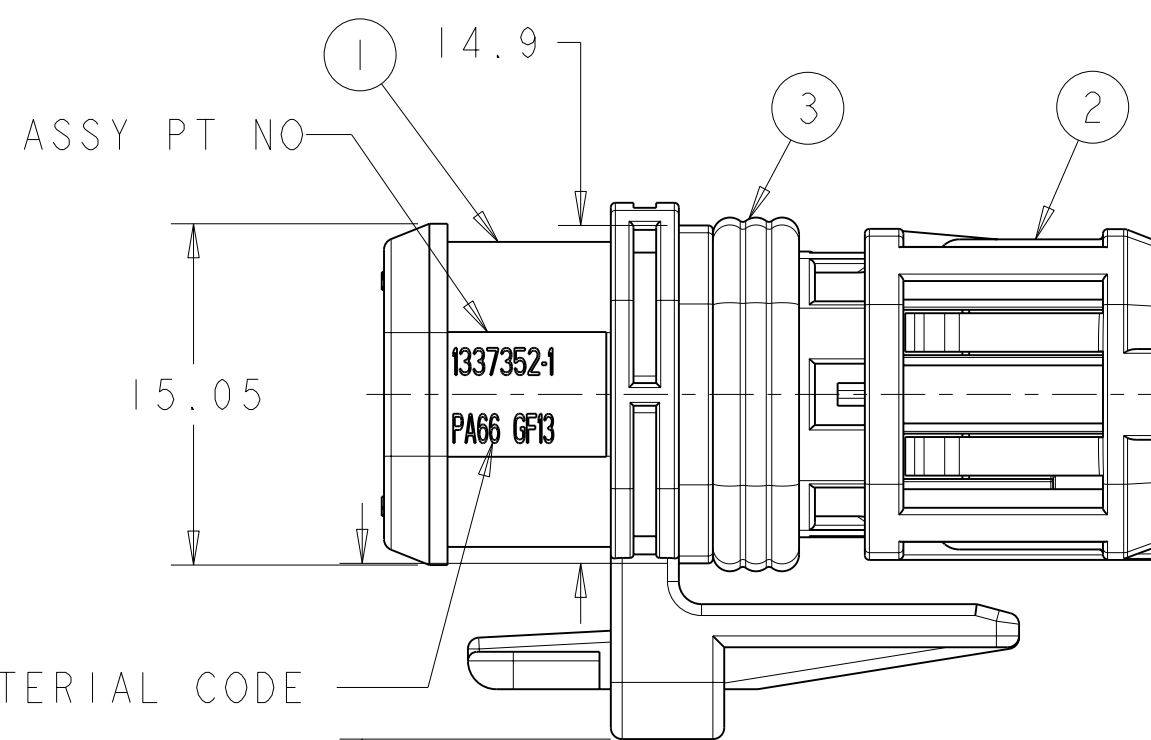


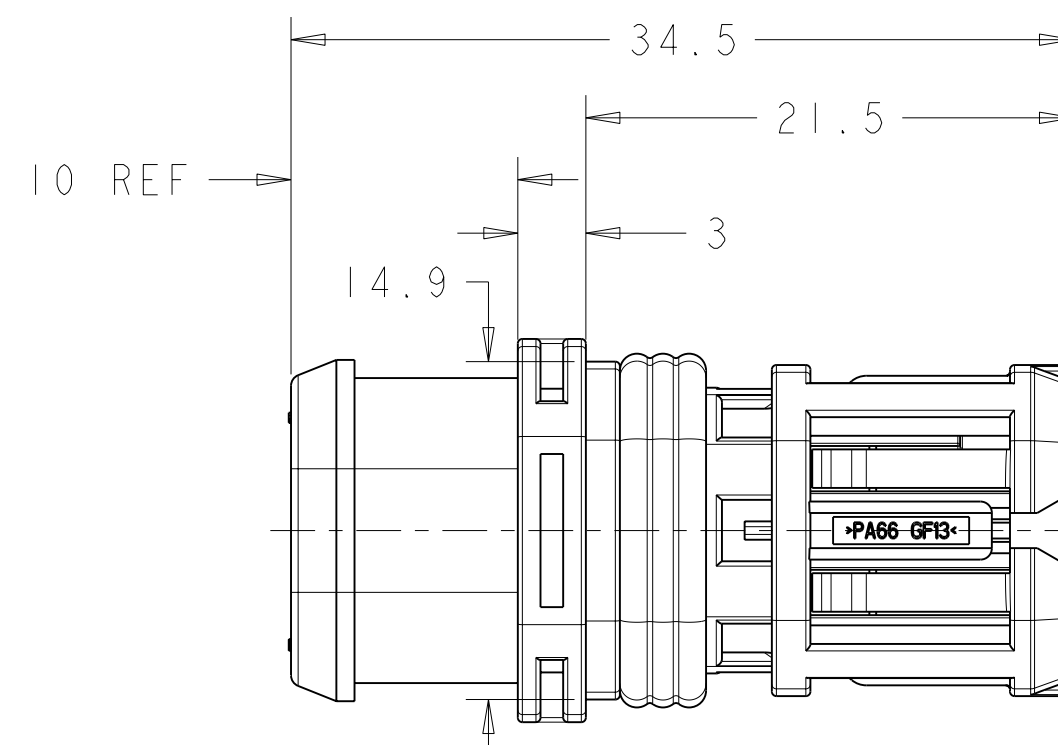

PRE-LOAD POSITION
FOR SECOND LOCK /
SEAL RETAINER

1 FOR USE WITH CONTACT SYSTEM Ø1.5MM SOCKET:

REFER TO CONTACT APPLICATION SPECIFICATION 114-18040-1
FOR WIRE SIZE & INSULATION DIAMETER SIZE DETAILS.

2 MATING INTERFACE DETAILS: 114-3226

GREEN	FLOURO-CARBON VF544-70 (WITH SILICONE COATING)	1	PERIPHERAL SEAL	3	1337352-1
RED	13% G.F. NYLON	1	SEAL RETAINER / SECONDARY LOCK	2	
BLACK	13% G.F. NYLON	1	4-WAY RECEPTALCE CONN. HSG.	1	
COLOUR	MATERIAL	QTY.	DESCRIPTION	ITEM	ASSEMBLY P/N

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		ITEM ROSEBERRY 1711	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm	LINEAR ±0.5	0 PLC ±	
	1 PLC ±	2 PLC ±	
	2 PLC ±	3 PLC ±	
	3 PLC ±	4 PLC ±	
	4 PLC ±	ANGLES ±0.5	
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
SEE TABLE	N/A	-	-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1337352-1](#)