




Quality Products. Service Excellence.

## Isolation - Step Down (115VAC to 95VAC) 179 Series


Plug In - "Classic" equipment or Japanese

### Features




**Classic**

**RoHS**

- Primary 115VAC, 50/60 Hz., Secondary 95VAC.
- Provides circuit isolation.
- Electrostatic shield between primary & secondary.
- World wide applications, 50 or 60 Hz. operation, step down (115VAC to 95 VAC).
- Designed mainly for Japanese equipment in North America.
- Perfect for operating "Classic" equipment that can not tolerate today's higher line voltages (ie..125 VAC input will produce a stress free 105 VAC output at full load PLUS isolation and shielding).
- Standard 3-wire, grounded plug (can also be used with **adaptors** for proper grounding).
- Input (primary) connected to a 5 foot long cord and standard North American plug (NEMA 5-15P)
- Output (secondary) connected to two standard - 3 wire grounded receptacles.
- Features include ventilated black steel case, rocker lighted on-off switch & fuse protected output.
- Indoor use only.
- **Remember** - These units do NOT convert line frequency
-  This series has been discontinued and is available only as long as stock lasts. At this time there is no replacement however parts can be ordered as a custom. Contact Hammond customer service for a quote.

### Accessories

- International Grounded Adaptor Plugs

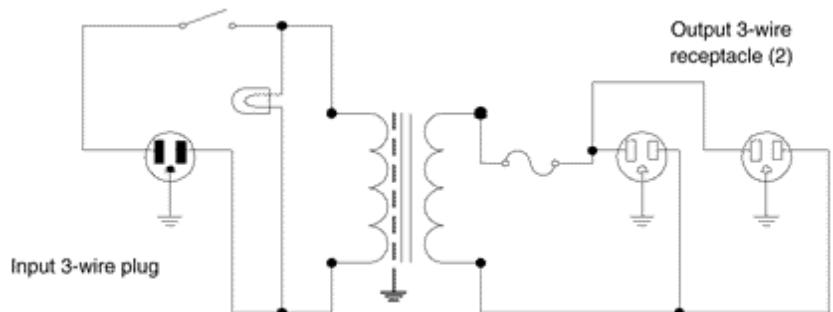

Part No.	Capacity	Outlet	Overall Dimensions		
	VA	Qty	A	B	C
179E	750	2	7.00	8.25	5.38
179F	1000	2	7.00	9.75	5.38
179G	1500	2	8.50	9.00	6.75

© 2020. Hammond Manufacturing Ltd. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[179D](#) [179E](#) [179F](#) [179C](#) [179G](#)