

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT 2003 By -

LOC

J

	DIST
--	------

REVISIONS

变更

	F
--	---

LTR

DESCRIPTION

DATE _____

	DWN
--	-----

	APVD
--	------


H2

REVISÉD PER ECO-11-005140

28MAR11

RK

HMR

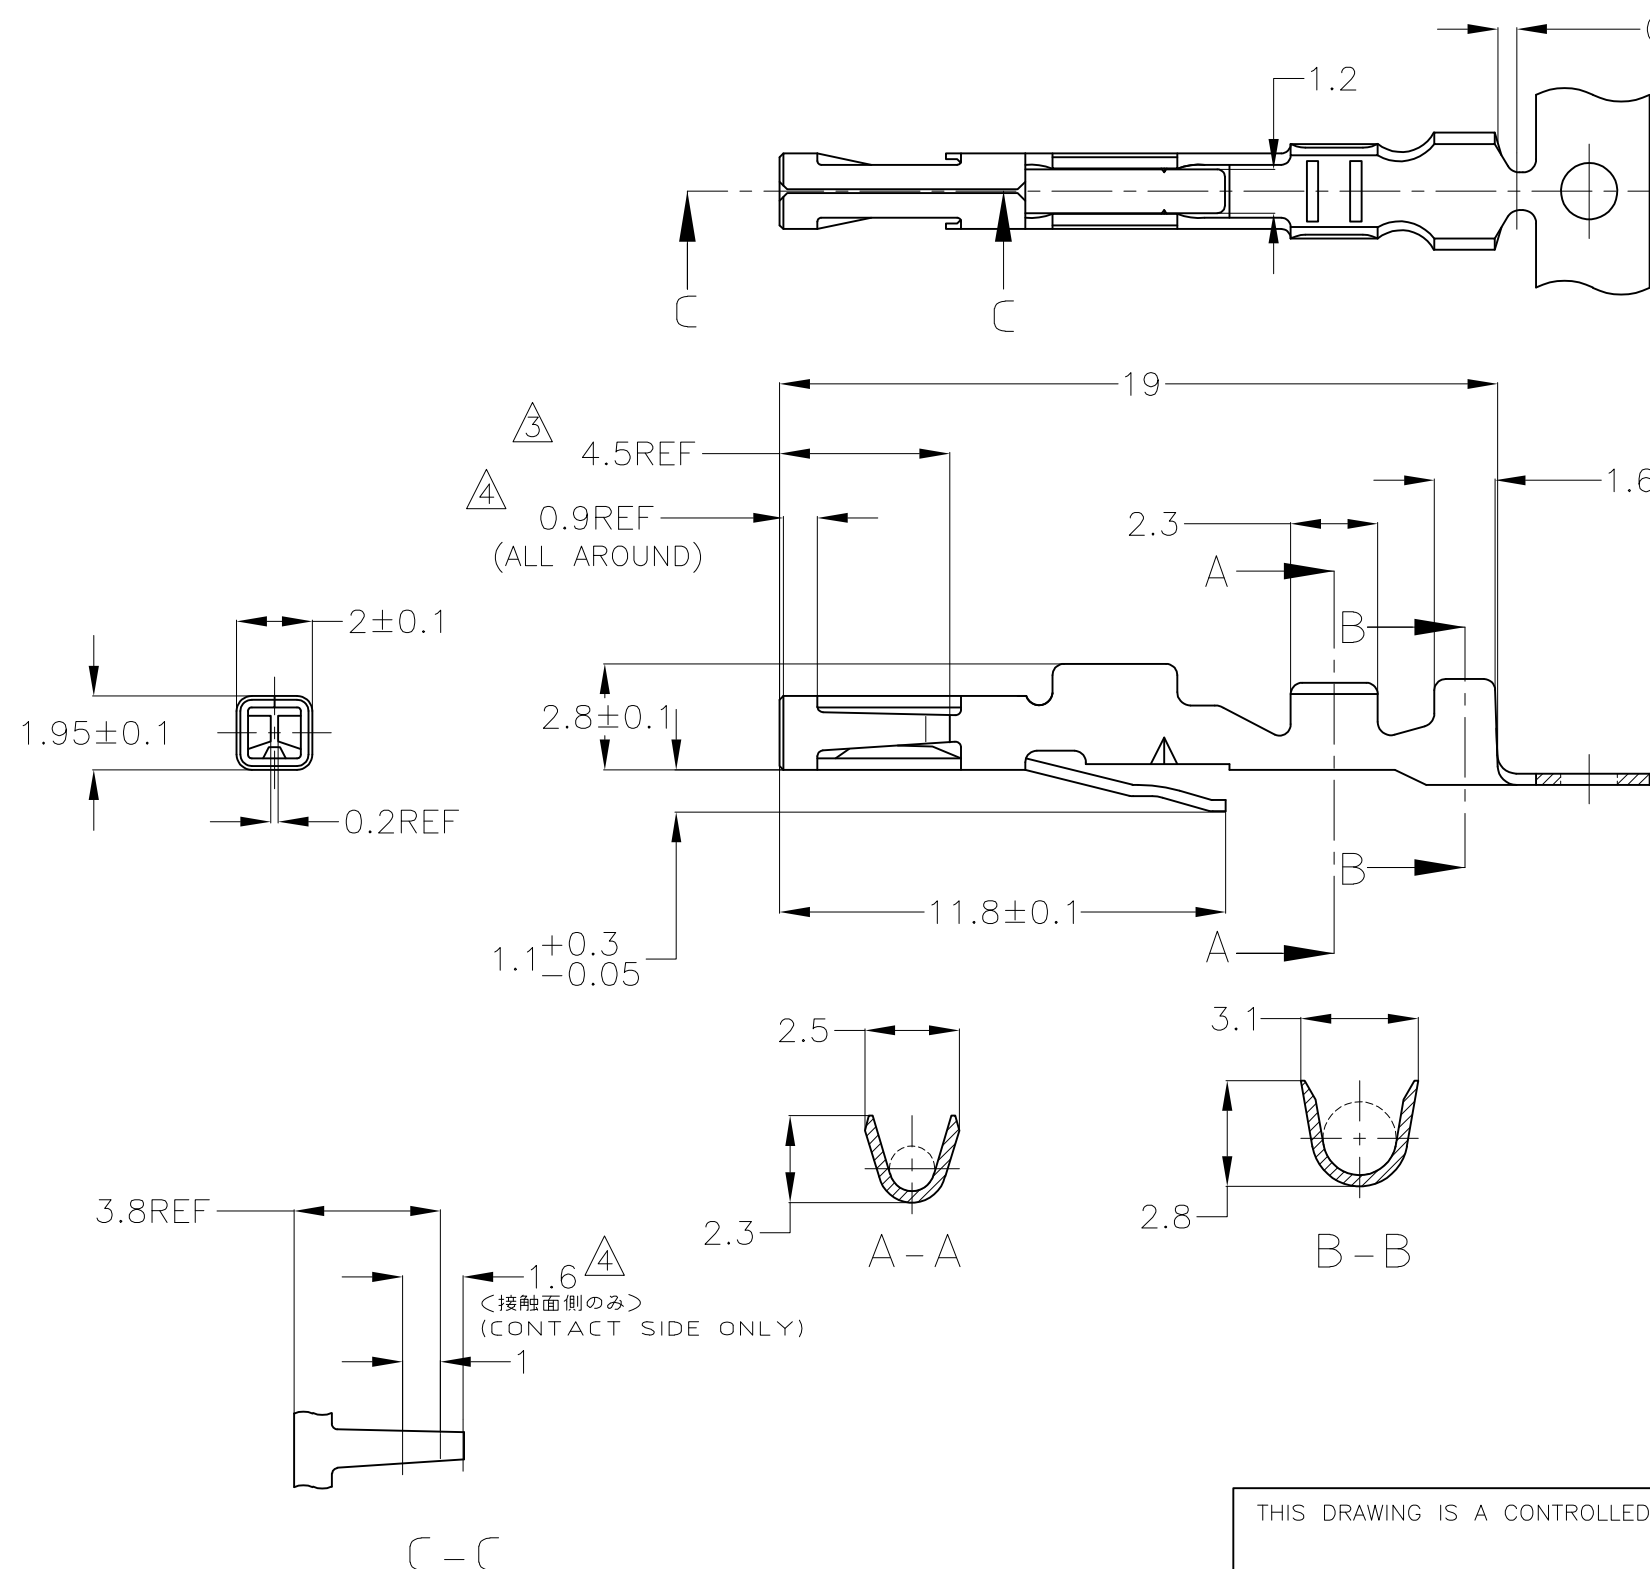


注；

- 1 使用ハウジング型番 172021,172047 他
- 2 製品規格: 108-5124
- ③ 全面ニッケルめっきの上に4.5mmの部分に0.38 μ m以上の金めっき
- ④ 全面ニッケルめっきの上に接触バネ内側 1.6mmの部分に0.38 μ m以上の金めっき
コンタクト先端 0.9mmのところに金フラッシュめっき
- ⑤ 1-170291-1の逆巻きリール

NOTES;

- 1 MATABLE HOUSING: 172021, 172047 AND OTHERS
2 PRODUCT SPECIFICATION: 108-5124
3 0.38μm MIN. SELECTIVE GOLD PLATING IN 4.5mm LENGTH OVER
NICKEL PLATING
4 0.38μm MIN. SELECTIVE GOLD IN 1.6mm LENGTH (INSIDE OF LEAF) OVER
NICKEL PLATING, GOLD FLASH PLATING IN TIP OF CONTACT 0.9mm LENGTH
5 REVERSE REEL OF 1-170291-1

		型番 (NUMBER)	材料 (MATERIAL)	仕上 (FINISH)	バラ端子型番 (L/P PART NUMBER)
OBSOLETE		1-170291-1	黄銅, BRASS, 0.3t	錫めっき済 PRE-TINND MAT'L	1-170321-1
		1-170291-3	黄銅, BRASS, 0.3t		—/—
		1-170291-4	リン青銅, 0.3t PHOS-BZ	錫めっき済 PRE-TINND MAT'L	1-170321-4
		1-170291-7	リン青銅, 0.3t PHOS-BZ		—/—
		3-170291-1	黄銅, BRASS, 0.3t	錫めっき済 PRE-TINND MAT'L	—/—

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.YAMAGUCHI 09JUL03		PRE-FINISH MATERIAL TE Connectivity			
DIMENSIONS: 単位：耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3 ±1°		CHK K.BETSUI 09JUL03		NAME 名称	
		0-PLC ± 1-PLC ± 2-PLC ± 3-PLC ± 4-PLC ± ANGLES ±		APVD K.BETSUI 09JUL03		DUAL LINE INTERLOCK CONNECTOR	
				PRODUCT SPEC 製品規格 108-5124			
WIRE RANGE 0.3~0.56mm ² (AWG#22-#20)				APPLICATION SPEC 取付適用規格 114-5045		SIZE A3	
INSULATION DIA. 2.4mm MAX.		MATERIAL 材料 SEE TABLE		FINISH 仕上 SEE TABLE		CAGE CODE 00779	
				WEIGHT —		DRAWING NO 番号 C-170291	
				CUSTOMER DRAWING		RESTRICTED TO —	
						SCALE 尺度 5:1	
						SHEET 1 OF 1	
						REV H2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-170321-1](#)