

SPECIFICATION CONTROL DRAWING

55PC6004

TITLE

THREE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT


Date

1-25-93

Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

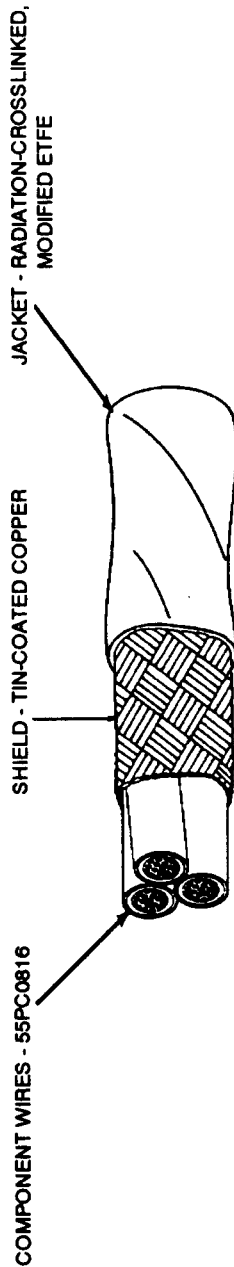

CONSTRUCTION DETAILS							
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)		WEIGHT (lbs/1000 ft.)
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC6004-24*	24	38	.0055	.0070	.122	.127	13.58
55PC6004-22*	22	38	.0055	.0070	.134	.139	17.27
55PC6004-20*	20	38	.0055	.0070	.153	.158	23.07
55PC6004-18*	18	38	.0055	.0070	.175	.180	31.61
55PC6004-16*	16	38	.0055	.0070	.192	.197	39.43

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms), 60 Hz, 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The *** in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.

Example: AWG 22, red, blue and yellow component wires; white jacket: 55PC6004-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Faraday Road, Dorcan

Swindon, Wiltshire SN3 5HH

Tel: (0793) 28171 Telex: 449409

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC6004-16-2/4/6-9CS2502](#) [55PC6004-18-2/4/6-9CS2970](#) [55PC6004-18-2/4/6-9CS2502](#) [55PC6004-20-2/4/6-9CS2970](#) [55PC6004-20-2/4/6-9CS2502](#)