
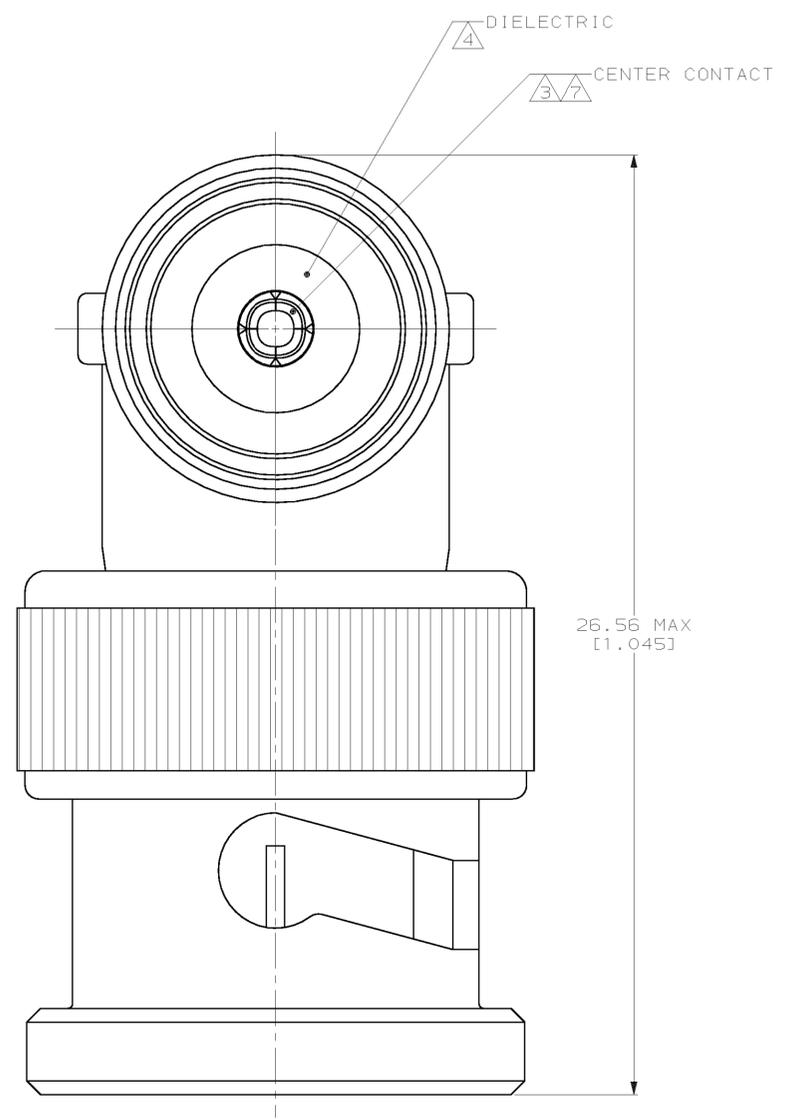


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16					REV PER OU20-0193-01	05APR01	MO

- 1 CARBON STEEL
- 2 BRASS PER ASTM-B-16
- 3 PHOSPHOR BRONZE PER ASTM-B-139
- 4 POLYMETHYLPENTENE: GENERAL PURPOSE
- 5 SILICONE RUBBER PER ZZ-R-765
- 6 ZINC DIE CAST PER ASTM-B-86
- 7 GOLD PLATE PER MIL-G-45204, 0.38µm [.000015] MIN THICKNESS
- 8 NICKEL PLATE PER QQ-N-290, 1.27µm [.000050] MIN THICKNESS
- 9 NICKEL PLATE PER QQ-N-290, 2.54µm [.000100] MIN THICKNESS
- 10 SPECIAL PACKAGING

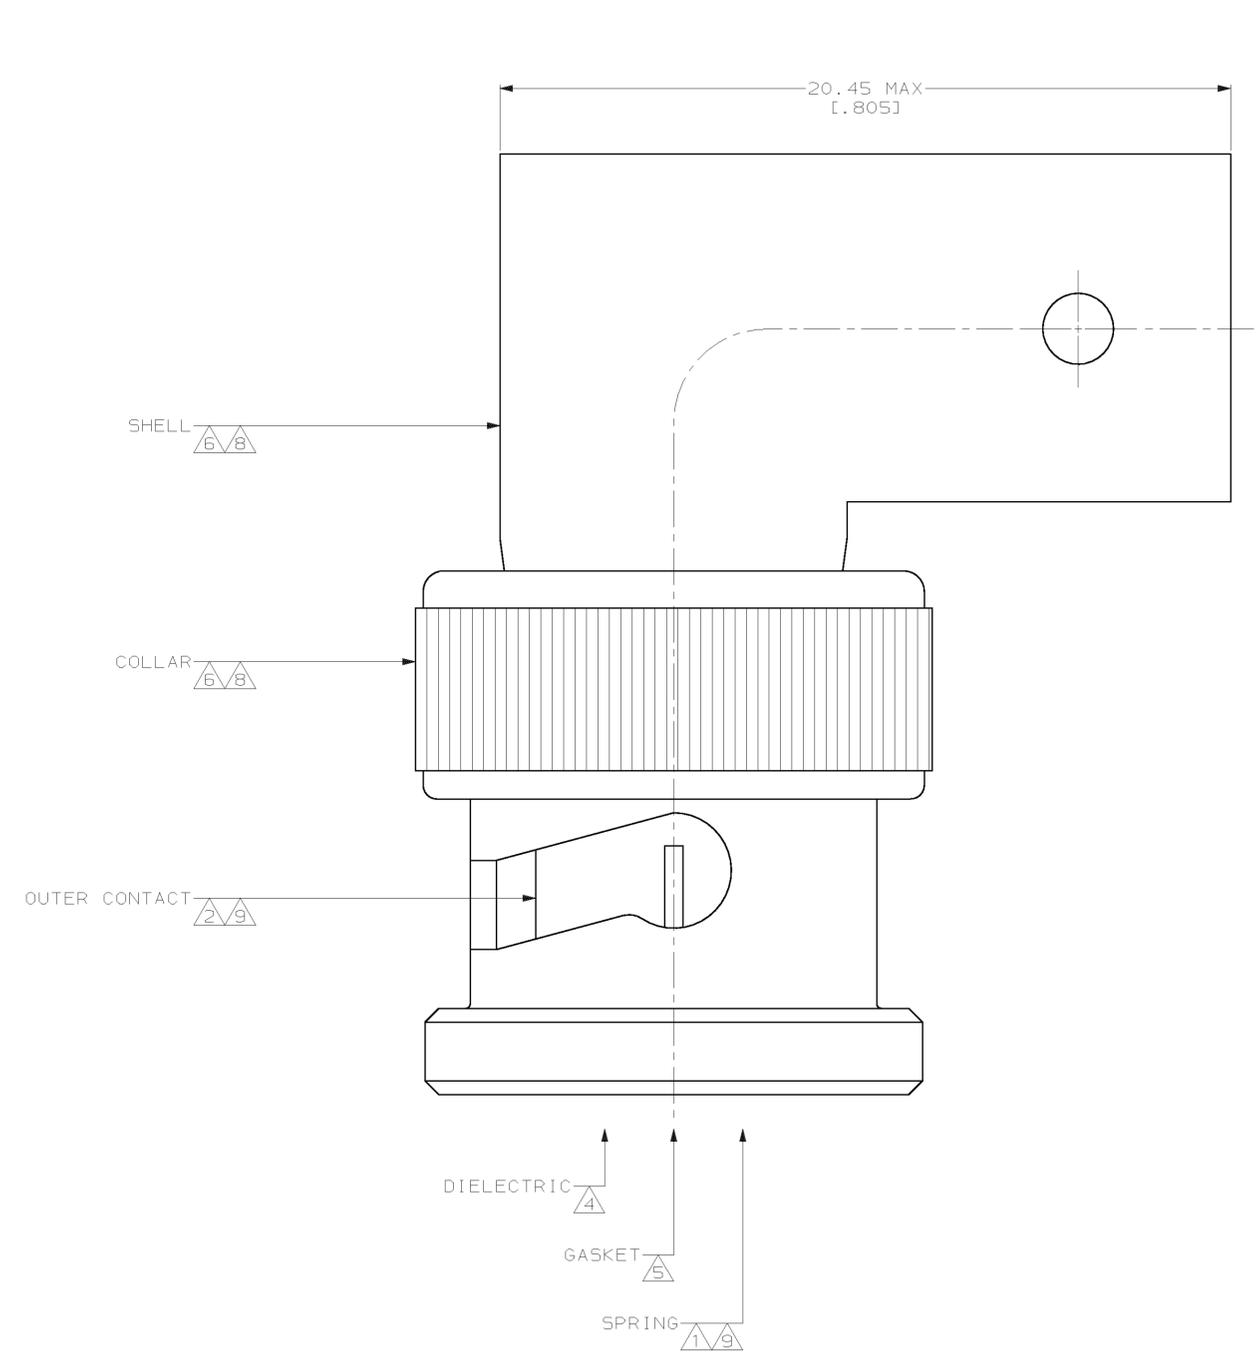

10 SUPSD BY 414666-1	414666-2
	414666-1
	PART NUMBER
	PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 12/OCT/93 M.E. COWHER CHK 18/OCT/93 M. PHILLIPS APPD 18/OCT/93 M. PHILLIPS APPD 18/OCT/93 M.E. COWHER	AMP Incorporated Harrisburg, PA 17105-3608
SEE NOTES	PRODUCT SPEC -	
FINISH	APPLICATION SPEC -	NAME PLUG-JACK ADAPTER, RIGHT ANGLE, BNC
SEE NOTES	WEIGHT -	SIZE D CAGE CODE 00779 DRAWING NO C-414666 SCALE 10:1 SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[414666-1](#)