

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


C

REV / 0L20-0042-96

07JAN97

ME

TM

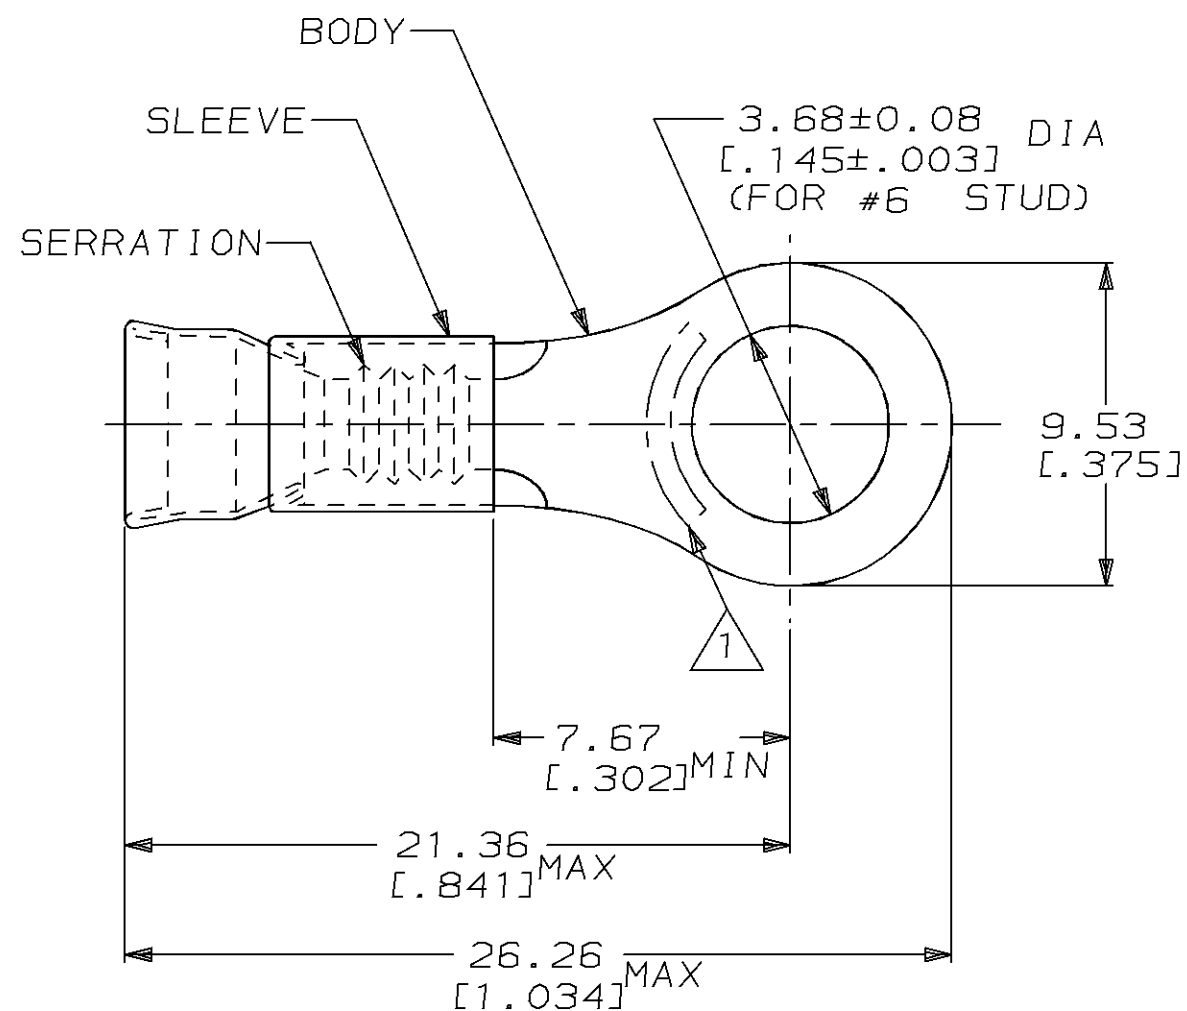

1 STAMP AMP 12-10\*APPROX AS SHOWN

2. WIRE INSUL DIA, 3.81-5.84 [0.150-0.230]

3. TONGUE MATL THK, 1.02±0.05 [0.040±0.002]

500

LOOSE PIECE

323066

QTY

PACKAGE TYPE

PART NO


AMP INCORPORATED  
CUSTOMER SERVICE SYSTEM

MAX RECOMMENDED OPERATING  
TEMPERATURE:  
343°C [650°F]

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.  
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING  
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:  
mm [in]

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:



0 PLC ±-  
1 PLC ±-  
2 PLC ±0.20 [0.008]  
3 PLC ±-  
4 PLC ±-  
ANGLES ±-

MATERIAL  
BODY, CU PER ASTM B152  
SLEEVE, NI SIL PER  
ASTM B122

FINISH  
BODY, NP, QQ-N-290

DWN 100CT94

CHK 100CT94

M ELLIS

APVD 100CT94

S BORTNER

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT -

CUSTOMER DRAWING

**AMP** AMP Incorporated  
Harrisburg, PA 17105-3608

NAME TERMINAL, RING TONGUE,  
STRATO-THERM™, DIAMOND GRIP™,  
WIRE SIZE, 12-10 AWG

SIZE A3 CAGE CODE 00779 DRAWING NO C-323066

SCALE 4:1 SHEET 1 OF 1 REV C

FOR ADDITIONAL  
PRODUCT INFORMATION OR  
COPIES OF DRAWINGS  
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER  
1-800-522-6752

FOR APPLICATION  
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER  
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

VOLTAGE RATING:  
-

CIRCULAR MIL AREA:  
2.62mm²-6.64mm² [5180-13100]

STRANDED WIRE

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[323066](#)