


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Flat connector socket, Number of positions: 32, Pitch: 0 mm, Connection method: Slip-on connection, Color: green, Contact surface: Tin

The illustration shows the version SFL (2,8-0,8) F 48



Key Commercial Data

Packing unit	1 pc
GTIN	4 017918 055936
Weight per Piece (excluding packing)	36.03 g
Custom tariff number	85369010
Country of origin	Poland

Technical data

Dimensions

Length	14.8 mm
Height	28.6 mm
Width	95 mm
Pitch	0.00 mm
Hole diameter	2.8 mm

General

Range of articles	SFL (2,8-0,8)
Insulating material group	II
Rated surge voltage (III/3)	2.5 kV
Nominal cross section	0 mm ²
Insulating material	PA-F



Technical data

General

Flammability rating according to UL 94	НВ
Number of positions	32

Standards and Regulations

Flammability rating according to UL 94	НВ
r iammasmy raming according to CE c r	

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440490
eCl@ss 8.0	27440490

ETIM

ETIM 3.0	EC000516
ETIM 4.0	EC002498
ETIM 5.0	EC000516

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Approvals

EAC / EAC


Ex Approvals



Approvals	
Approvals submitted	
Approval details	
EAC	
EAC	
Accessories	
Accessories	
Insulating sleeve	
Insulating sleeve - PT/FS 2	,8 - 1406700
	Insulating sleeve, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves

Drawings



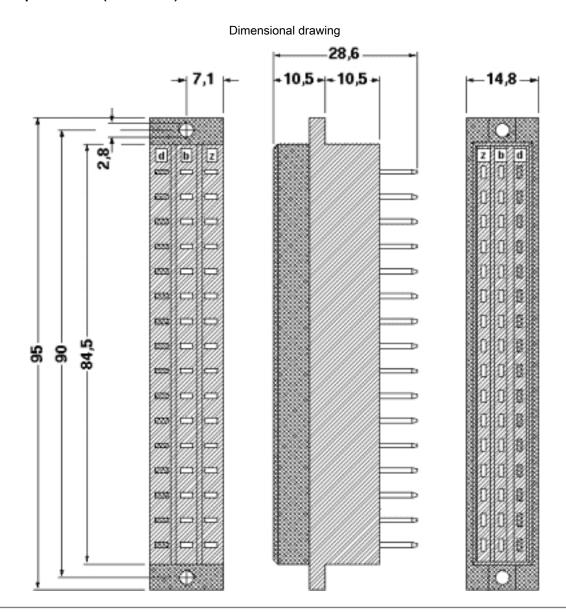

Phoenix Contact 2016 © - all rights reserved http://www.phoenixcontact.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact: 2285331