


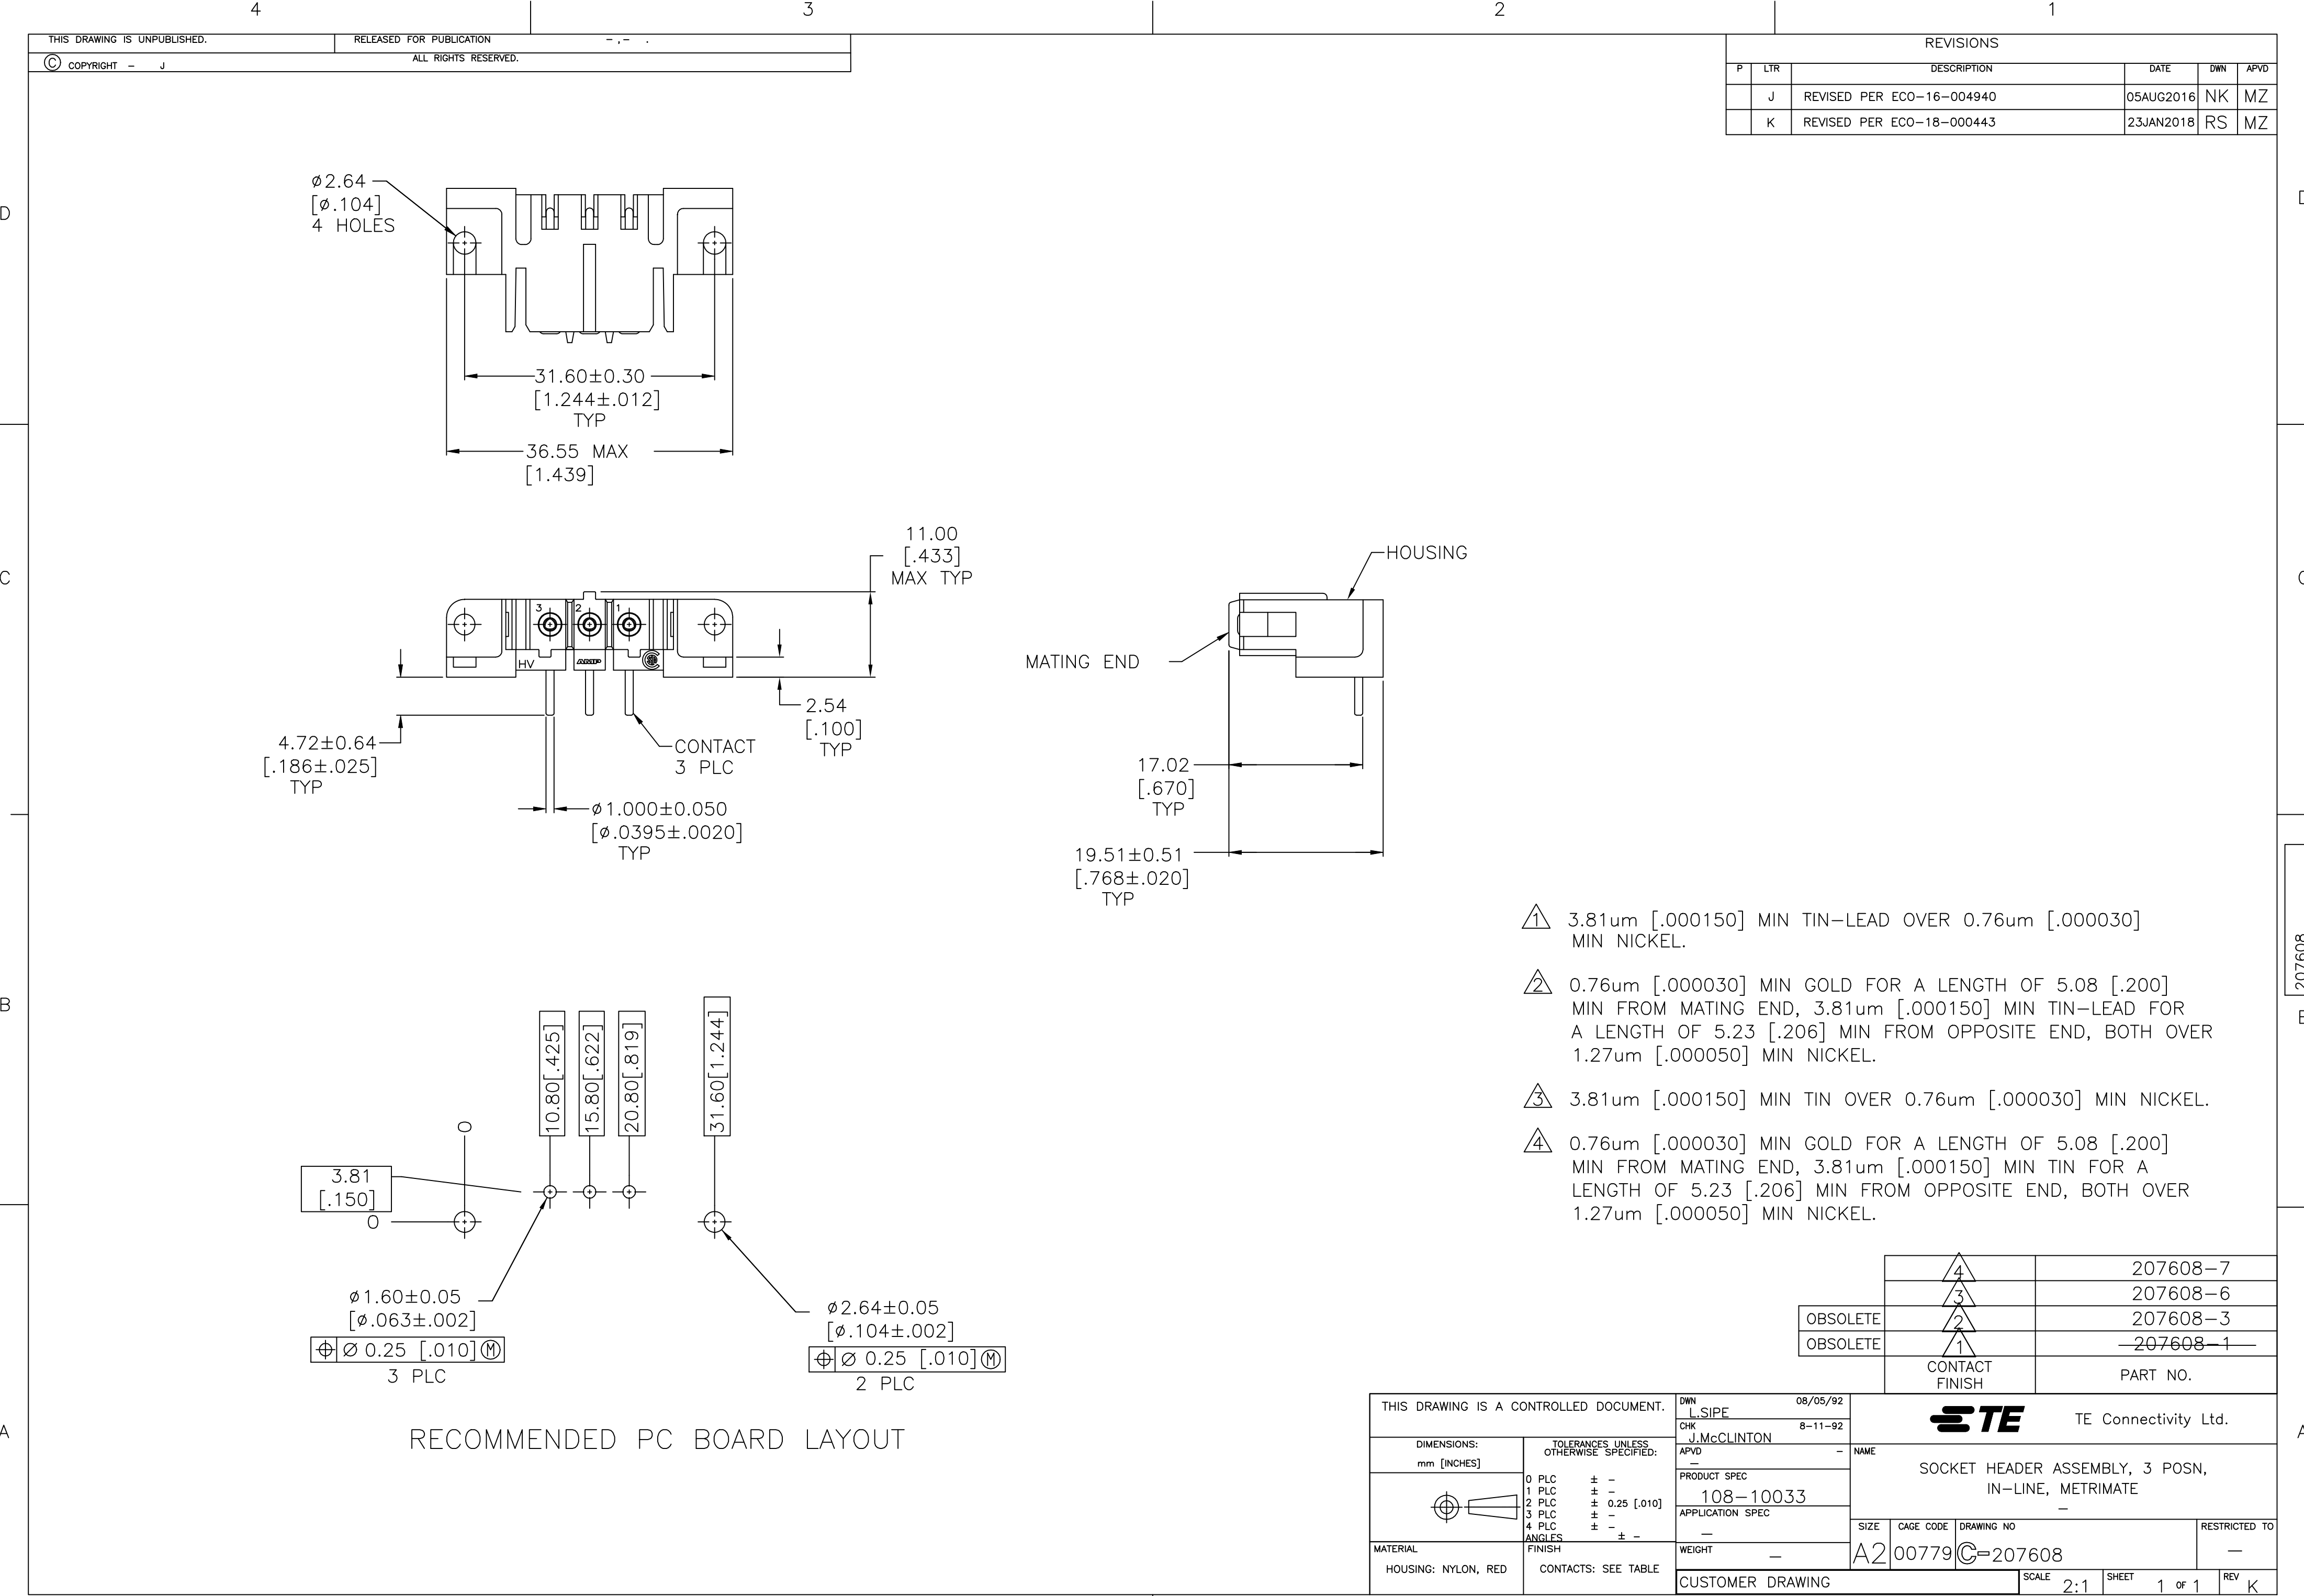

D

C

B

A

D

C

B

A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J	REVISED PER ECO-16-004940	05AUG2016	NK	MZ
	K	REVISED PER ECO-18-000443	23JAN2018	RS	MZ

- 1 3.81um [.000150] MIN TIN-LEAD OVER 0.76um [.000030] MIN NICKEL.
- 2 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 5.23 [.206] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 3 3.81um [.000150] MIN TIN OVER 0.76um [.000030] MIN NICKEL.
- 4 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 5.23 [.206] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

	4	207608-7
	3	207608-6
OBSOLETE	2	207608-3
OBSOLETE	1	207608-1
CONTACT FINISH		PART NO.

RECOMMENDED PC BOARD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.SIPE 08/05/92	TE Connectivity Ltd.			
DIMENSIONS: mm [INCHES]		CHK J.McCLINTON 8-11-92				
		APVD -	NAME			
		PRODUCT SPEC 108-10033	SOCKET HEADER ASSEMBLY, 3 POSN, IN-LINE, METRIMATE			
MATERIAL HOUSING: NYLON, RED		APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
		WEIGHT -	A2 00779 C=207608 -			
CONTACTS: SEE TABLE		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 of 1	REV K	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207608-1](#) [207608-6](#)