

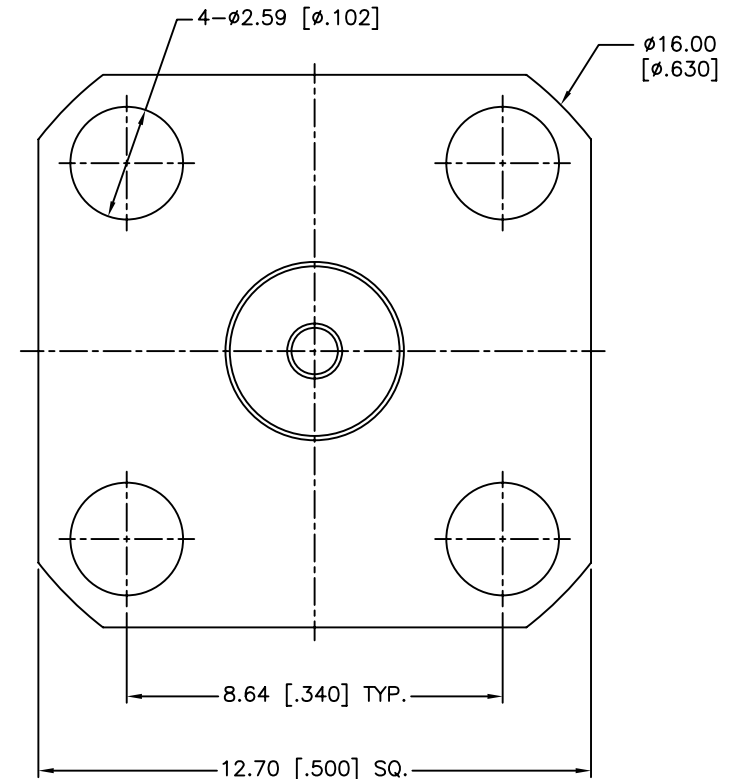


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/28/11	XXXXXX	INITIAL RELEASE

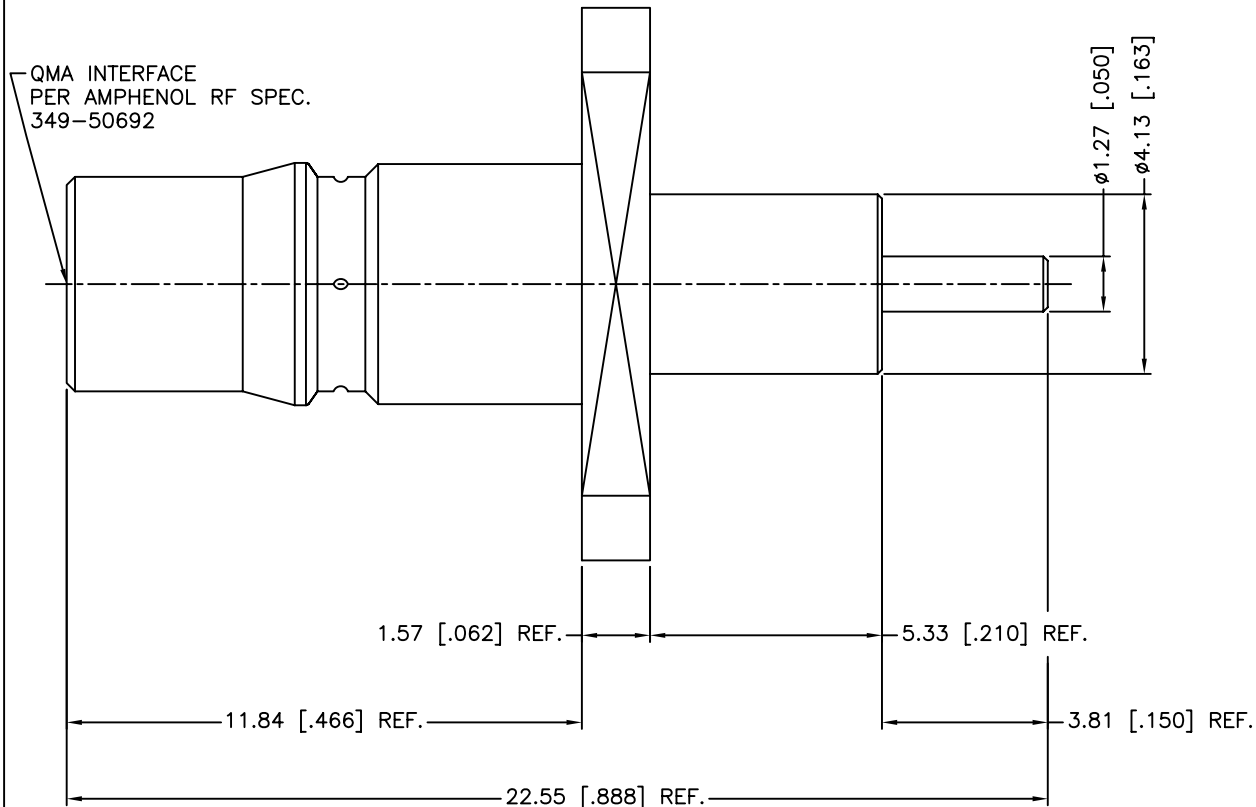

1. FREQUENCY RANGE: DC 0-6 GHZ
2. VSWR(RETURN LOSS): -32 dB TO 3 GHZ MAX.
-25 dB TO 6 GHZ MAX.
3. DURABILITY: 500 CYCLES MIN.
4. TEMPERATURE RANGE: -40°C ~ +80°C
5. CONTACT PIN MUST WITHSTAND A 6 LBS. AXIAL FORCE AND A 4 IN-OZ. MIN TORQUE
6. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED "AMPHENOL, 134103, AND DATE CODE"



3	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
DESCRIPTION	MATERIAL	FINISH	QTY	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	05/28/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/134103.DWG

Amphenol Connex

PART DESCRIPTION
QMA PANEL RECEPTACLE - 50 ohm EXTENDED TEFLON/CONTACT(.210"/.150")
PART NO.
134103
DWG. NO.
134103.DWG
REV.
NC
SIZE
A
SCALE
NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[134103](#)