

SIGN	DATE	DESCRIPTION	APPROVER
△	01/20'07	The Soldering temperature from 245° to 250°	Aaron
△	2010.08.12	The design is changed	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body (Contact pin): Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/VDE


- Voltage rating: 300VAC/250VAC
- Current rating: 10A/10A
- Wire range: 0.75-1.5mm²
- Solid wire(AWG): 14-24
- Stranded wire(AWG): 14-24
- Pull force:
- Screw:
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec △
- Safety Approval:



N=Number of contacts

HA xx 31 x 0 xxxx G

			G: Pb<40,000ppm
02	2 CONTACTS	2 Red	0000: "@" Logo (Standard)
03	3 CONTACTS	3 Orange	000A: "ANYTEK" Mark
...	...	5 Green(RAL6018/T)	Any special item by customer request.
24	24 CONTACTS	8 Grey(RAL7004/P)	please contact sales department.

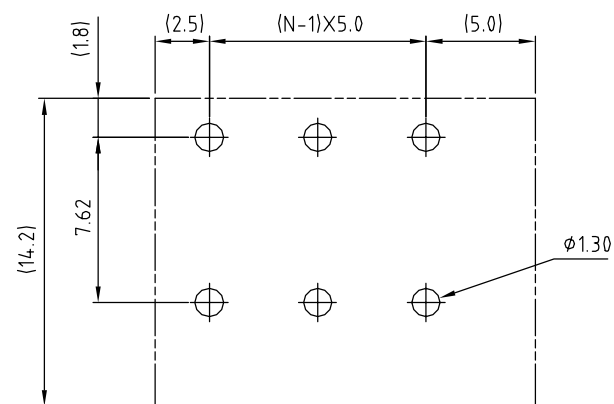


P.C.B. LAYOUT

2-6p	±0.20	±0.20
6-12p	±0.25	±0.25
12-24p	±0.40	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HA-5.0mm 180°			DWG NO.			8HA0008		
PART NO.		HAxx31x0xxxxG			DWG NO.		8HA0008			
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.					
				Chen Bo 2010.08.12			UNIT: mm		Tolerance	
							SCALE: NONE		X. ±0.50	
					SHEET: 01/01		REV: F		X.X ±0.30	
									X.XX ±0.10	
									X° ±1°	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[20020303-G041B01LF](#) [HA04315000J0G](#) [HA0931500000G](#) [HA1231500000G](#) [HA1131500000G](#) [HA0831500000G](#)
[HA0531500000G](#) [HA1031500000G](#) [HA2431500000G](#) [HA0631500000G](#) [HA1831500000G](#) [HA1631500000G](#)
[HA1531500000G](#) [HA2131500000G](#) [HA0731500000G](#) [HA0231500000G](#) [HA2231500000G](#) [HA2031500000G](#)
[HA2331500000G](#) [HA1731500000G](#) [HA1931500000G](#) [HA0331500000G](#) [HA1431500000G](#) [HA1331500000G](#)