

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.


© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	L6	ECR-16-016231	12JAN2018	SD	PS

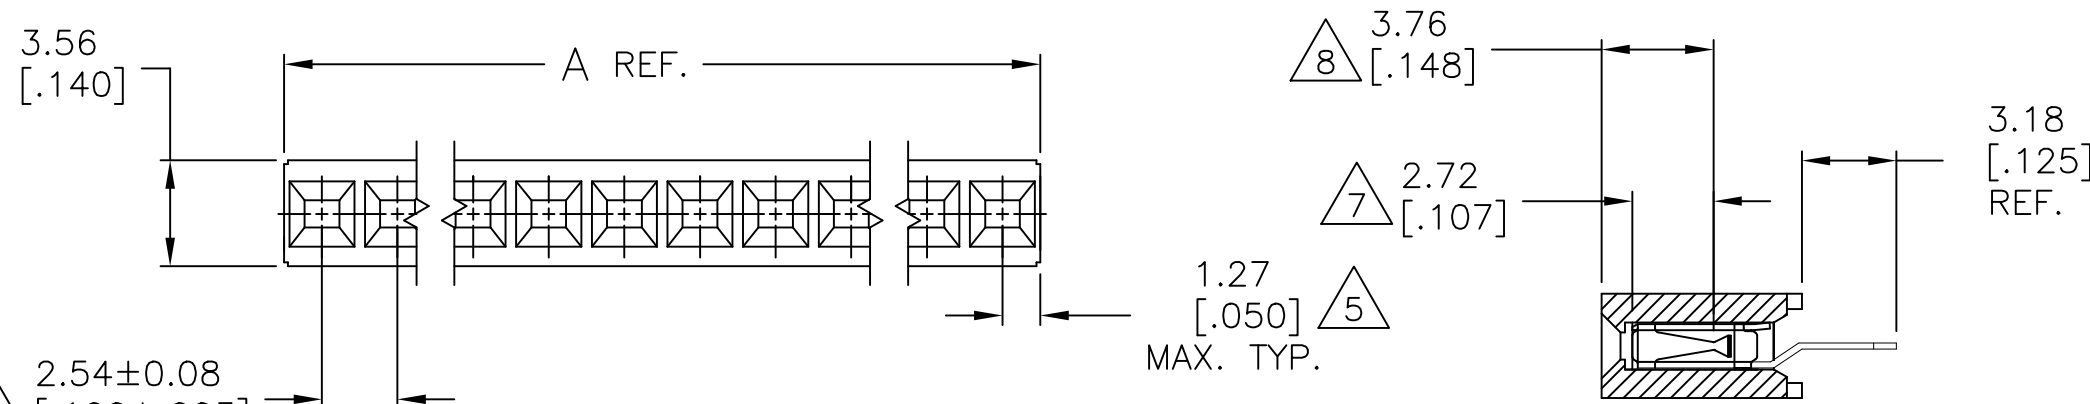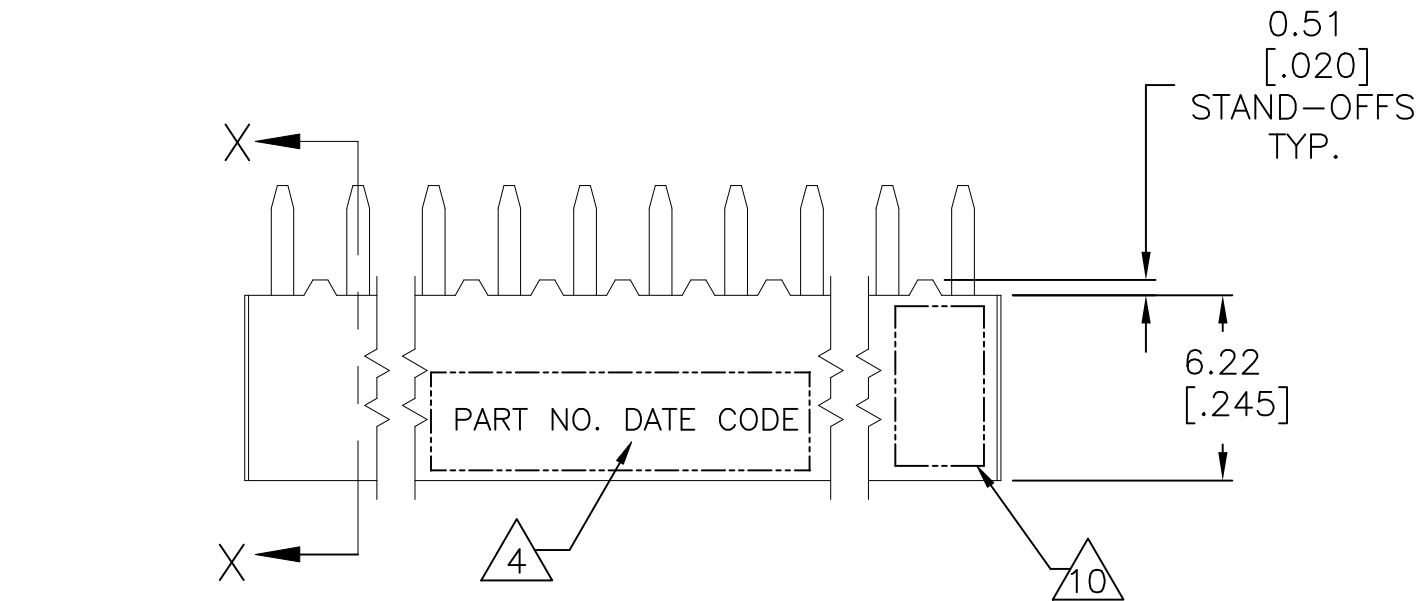

SECTION X-X

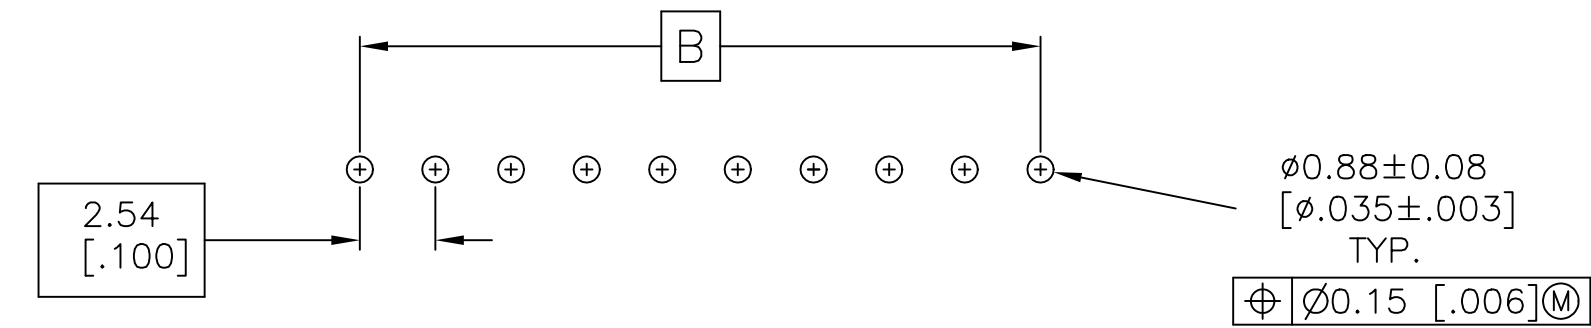

RECOMMENDED PCB LAYOUT

OBSOLETE	2.54 [.100]	5.08 [.200]	2	2	6	9	3-146138-9
	96.52 [3.800]	99.06 [3.900]	39	2			3-146138-8
	93.98 [3.700]	96.52 [3.800]	38	2			3-146138-7
	91.44 [3.600]	93.98 [3.700]	37	2			3-146138-6
	88.90 [3.500]	91.44 [3.600]	36	2			3-146138-5
	86.36 [3.400]	88.90 [3.500]	35	2			3-146138-4
	83.82 [3.300]	86.36 [3.400]	34	2			3-146138-3
	81.28 [3.200]	83.82 [3.300]	33	2			3-146138-2
	78.74 [3.100]	81.28 [3.200]	32	2			3-146138-1
	71.12 [2.800]	73.66 [2.900]	29	2			3-146138-0
	68.58 [2.700]	71.12 [2.800]	28	2			2-146138-9
	66.04 [2.600]	68.58 [2.700]	27	2			2-146138-8
	63.50 [2.500]	66.04 [2.600]	26	2			2-146138-7
	60.96 [2.400]	63.50 [2.500]	25	2			2-146138-6
	58.42 [2.300]	60.96 [2.400]	24	2			2-146138-5
	55.88 [2.200]	58.42 [2.300]	23	2			2-146138-4
	53.34 [2.100]	55.88 [2.200]	22	2			2-146138-3
OBSOLETE	50.80 [2.000]	53.34 [2.100]	21	2			2-146138-2
	76.20 [3.000]	78.74 [3.100]	31	2			2-146138-1
	99.06 [3.900]	101.60 [4.000]	40	2			2-146138-0
	73.66 [2.900]	76.20 [3.000]	30	2			1-146138-9
	48.26 [1.900]	50.80 [2.000]	20	2			1-146138-8
	45.72 [1.800]	48.26 [1.900]	19	2			1-146138-7
	43.18 [1.700]	45.72 [1.800]	18	2			1-146138-6
	40.64 [1.600]	43.18 [1.700]	17	2			1-146138-5
	38.10 [1.500]	40.64 [1.600]	16	2			1-146138-4
	35.56 [1.400]	38.10 [1.500]	15	2			1-146138-3
	33.02 [1.300]	35.56 [1.400]	14	2			1-146138-2
	30.48 [1.200]	33.02 [1.300]	13	2			1-146138-1
	27.94 [1.100]	30.48 [1.200]	12	2			1-146138-0
	25.40 [1.000]	27.94 [1.100]	11	2			146138-9
	22.86 [.900]	25.40 [1.000]	10	2			146138-8
	20.32 [.800]	22.86 [.900]	9	2			146138-7
	17.78 [.700]	20.32 [.800]	8	2			146138-6
	15.24 [.600]	17.78 [.700]	7	2			146138-5
	12.70 [.500]	15.24 [.600]	6	2			146138-4
	10.16 [.400]	12.70 [.500]	5	2			146138-3
	7.62 [.300]	10.16 [.400]	4	2			146138-2
	5.08 [.200]	7.62 [.300]	3	2			146138-1


- 1 HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE
- 2 CONTACT: DUPLEX PLATED 0.25µm[.000010] MIN GOLD IN CONTACT
AREA, 3.81-7.62µm[.000150-.000300] BRIGHT TIN-LEAD ON LEADS
ALL OVER 1.27µm[.000050] NICKEL
- 3 THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS
- 4 MARK PART NUMBER AND DATE CODE IN APPROXIMATE LOCATION SHOWN, EITHER SIDE.
- 5 TOLERANCE IS NON-CUMULATIVE.
- 6 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE CONNECTIVITY LOGO.
- 7 POINT-OF-MEASUREMENT DIMENSION FOR PLATING
THICKNESS (INSIDE CONTACT BEAM).
- 8 POINT-OF-CONTACT DIMENSION.
- 9 NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- 10 TE CONNECTIVITY LOGO AND CSA LOGO ARE MOLDED INTO HOUSING.
- 11 CONTACT: DUPLEX PLATED 0.25µm[.000010] MIN GOLD IN CONTACT AREA, 3.81-7.62µm
[.000150-.000300] MATTE TIN ON LEADS, ALL OVER 1.27µm[.000050] MIN. NICKEL.
- 12 ROHS 2002/95/EC COMPLIANT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER 05NOV02	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]		CHK J.OLSON 05NOV02	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.OLSON 05NOV02	PRODUCT SPEC	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25[.010] 3 PLC ± 0.13[.005] 4 PLC ± - ANGLES ± - FINISH		APPLICATION SPEC 108-25022 114-25018	REC ASSY, MOD IV, SR, .100 CL VRT BOARD MOUNT, CLOSED, TE SHORT PNT. OF CONTACT	
MATERIAL 1	WEIGHT 2 11	CUSTOMER DRAWING	SIZE A2	CAGE CODE 00779
DRAWING NO C=146138			RESTRICTED TO -	SCALE 4:1
SHEET 1 OF 2			REV L6	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT - By -	ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

OBSOLETE		2.54	[.100]	5.08	[.200]	2		8-146138-9
		96.52	[3.800]	99.06	[3.900]	39		8-146138-8
		93.98	[3.700]	96.52	[3.800]	38		8-146138-7
		91.44	[3.600]	93.98	[3.700]	37		8-146138-6
		88.90	[3.500]	91.44	[3.600]	36		8-146138-5
		86.36	[3.400]	88.90	[3.500]	35		8-146138-4
		83.82	[3.300]	86.36	[3.400]	34		8-146138-3
		81.28	[3.200]	83.82	[3.300]	33		8-146138-2
		78.74	[3.100]	81.28	[3.200]	32		8-146138-1
		71.12	[2.800]	73.66	[2.900]	29		8-146138-0
		68.58	[2.700]	71.12	[2.800]	28		7-146138-9
		66.04	[2.600]	68.58	[2.700]	27		7-146138-8
		63.50	[2.500]	66.04	[2.600]	26		7-146138-7
		60.96	[2.400]	63.50	[2.500]	25		7-146138-6
		58.42	[2.300]	60.96	[2.400]	24		7-146138-5
		55.88	[2.200]	58.42	[2.300]	23		7-146138-4
		53.34	[2.100]	55.88	[2.200]	22		7-146138-3
		50.80	[2.000]	53.34	[2.100]	21		7-146138-2
		76.20	[3.000]	78.74	[3.100]	31		7-146138-1
		99.06	[3.900]	101.60	[4.000]	40		7-146138-0
		73.66	[2.900]	76.20	[3.000]	30		6-146138-9
		48.26	[1.900]	50.80	[2.000]	20		6-146138-8
		45.72	[1.800]	48.26	[1.900]	19		6-146138-7
		43.18	[1.700]	45.72	[1.800]	18		6-146138-6
		40.64	[1.600]	43.18	[1.700]	17		6-146138-5
		38.10	[1.500]	40.64	[1.600]	16		6-146138-4
		35.56	[1.400]	38.10	[1.500]	15		6-146138-3
		33.02	[1.300]	35.56	[1.400]	14		6-146138-2
		30.48	[1.200]	33.02	[1.300]	13		6-146138-1
		27.94	[1.100]	30.48	[1.200]	12		6-146138-0
		25.40	[1.000]	27.94	[1.100]	11		5-146138-9
		22.86	[.900]	25.40	[1.000]	10		5-146138-8
		20.32	[.800]	22.86	[.900]	9		5-146138-7
		17.78	[.700]	20.32	[.800]	8		5-146138-6
		15.24	[.600]	17.78	[.700]	7		5-146138-5
		12.70	[.500]	15.24	[.600]	6		5-146138-4
		10.16	[.400]	12.70	[.500]	5		5-146138-3
		7.62	[.300]	10.16	[.400]	4		5-146138-2
		5.08	[.200]	7.62	[.300]	3		5-146138-1
	FINISH	B		A		NO OF POSN	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN M.BINNER		OSNOV02		 TE Connectivity Ltd.		
			CHK J.OLSON		OSNOV02				
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD J.OLSON		OSNOV02		NAME	
		0 PLC ± -		PRODUCT SPEC		REC ASSY, MOD IV, SR, .100 CL VRT BOARD MOUNT, CLOSED, TE SHORT PNT. OF CONTACT			
		1 PLC ± -		108-25022					
		2 PLC ± 0.25[.010]							
		3 PLC ± 0.13[.005]		APPLICATION SPEC					
		4 PLC ± -		114-25018		SIZE		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		CAGE CODE		DRAWING NO	
				-		A2 00779		C-146138	
CUSTOMER DRAWING						SCALE		SHEET	
						4:1		2 of 2	
								REV	
								L6	

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm [INCHES]	
	0 PLC ± -
	1 PLC ± -
	2 PLC ± 0.25[.010]
	3 PLC ± 0.13[.005]
	4 PLC ± -
	ANGLES ± -
	FINISH



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146138-3](#)