




番号 (NUMBER)
C-170209


一般公差	
10以下	±0.2
10を超え30以下	±0.25
30を超え100以下	±0.3



断面 A-A



断面 B-B

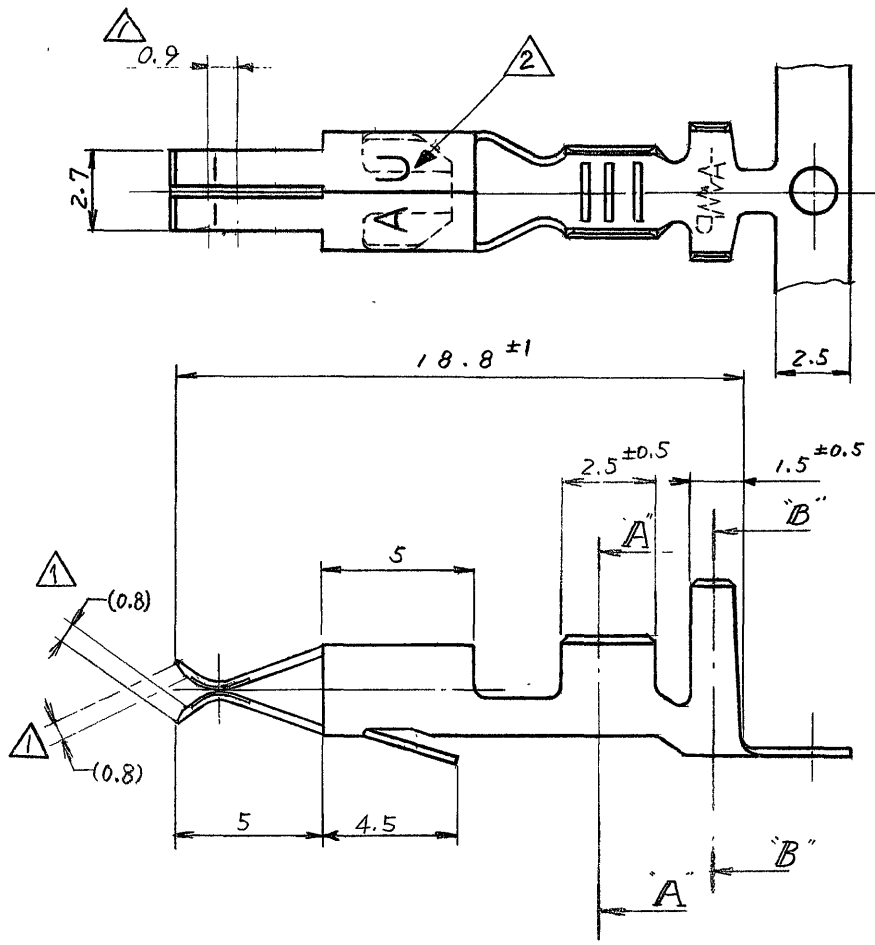

注
△ 金めっき識別マ-ク

NOTE
△ GOLD PLATING MARK

単位: 耗 DIMENSIONS IN MM DO NOT SCALE PRINT

G	Revised	J-12591	A.N	DR	8/27/90				
F	Revised	J-12118	S.S	M.O	10/1/89	170210-2	△ 部分金めっき (接触部分のみ)	焼青銅	170209-2
E	Revised	J82-6690	K.O	DR	8/27/82	170210-1	—	金めっき焼青銅	170209-1
D	変更 (J81-6323)	507	DR	1/5/82		バラ状型番	仕上	材料	連鎖状型番
C2	Revised (P-DWG Rev F2)	517	DR	12/1/88		◎1975 BY AMP (Japan), Ltd. ALL RIGHTS RESERVED AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING. 参考図面 (CUSTOMER COPY) (REFERENCE ONLY)			
C1	Revised (Rev F)	517	DR	1/1/88					
C	Revised (Rev E)	518	DR	1/28/87		材料 (MATERIAL) 板厚: 0.32 (表参照) 仕上 (FINISH) 表参照 抱合電線断面積 (WIRE RANGE) 0.5 ~ 2.27 mm² (AWG 20 ~ #14) 被覆外径 (INSULATION DIA) 2.2 ~ 3.4 mm (0.086 ~ 1.34 IN)			
B	Revised (Rev C)	518	DR	1/2/86					
A	REVISED (P-DWG R-A)	3A	DR	1/9/86		分類 (CLASS) — 型式 (TYPE) —			
O	Released (Rev O)	MT	DR	4/16/75					
LTR	変更 (REVISION RECORD)	DR	CHK.	DATE		4-1	J A	C-170209	G
DR	M. T. SUGIYAMA 4/15/75	DE.				ミニスフリング リセフタクル			
CHK.	X. Shimai 4/16/75	APP							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[170209-2](#)