

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014563073

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version G, Positive Lock, Wire Size 28 AWG, 0.76µm Gold (Au), 7 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400-001 (PDF)

Packaging Specification PK-70873-0001-001 (PDF)

RoHS Certificate of Compliance (PDF)


Agency Certification		
CSA		LR19980
UL		E29179
General		
Product Family		Ribbon Cable / Wire Trap Connectors
Series		70400
Comments		Terminals Preloaded
Component Type		Housing
Glow-Wire Capable		No
Overview		SL Modular Connectors
Product Name		SL
UPC		800753983519

Physical		
Circuits (Loaded)		7
Color - Resin		Black
Durability (mating cycles max)		50
Entry Angle		Vertical
Flammability		94V-0
Lock to Mating Part		Yes
Material - Metal		Phosphor Bronze
Material - Plating Mating		Gold
Material - Plating Termination		Tin
Material - Resin		Polyester Alloy
Number of Rows		1
PCB Retention		None
Packaging Type		Tube
Pitch - Mating Interface		2.54mm
Plating min - Mating		0.762µm
Plating min - Termination		1.905µm
Polarized to Mating Part		Yes
Stackable		Yes
Surface Mount Compatible (SMC)		N/A
Temperature Range - Operating		-40° to +105°C
Termination Interface: Style		IDT or Pierce
Wire Insulation Diameter		1.35mm max.
Wire Size AWG		28
Wire/Cable Type		Discrete Wire, Ribbon Cable

Electrical		
Current - Maximum per Contact		3.0A
Voltage - Maximum		250V

Material Info

Reference - Drawing Numbers

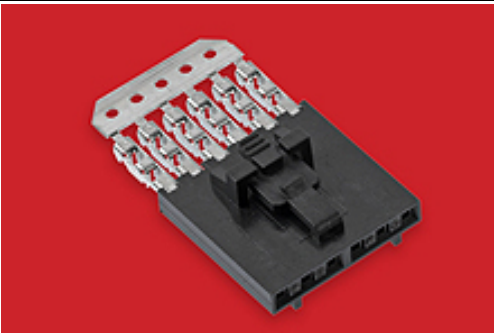

Series image - Reference only

EU ELV	
Not Reviewed	
EU RoHS	China RoHS
Not Reviewed	
REACH SVHC	
Not Reviewed	
Halogen-Free	
Status	
Not Reviewed	
For more information, please visit Contact US	
China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series

70400 Series

Mates With

Single Row Housing [70018](#) , [70107](#) Version A, [70107](#) Version B, [70543](#) , [70545](#) , [70553](#) , [70555](#)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
IDT - Semi-automatic	11200949
- Bench-Top Terminator	

Packaging Specification
Product Specification
Sales Drawing

PK-70873-0001-001
PS-70400-001
SDA-70400-1541-1564

IDT Discrete	<u>621000700</u>
Handtool Module	
Ribbon Cable Tool	<u>622016600</u>
Kit, Press Not	
Included	
Hawk Ribbon Cable	<u>623003000</u>
Terminator without	
Break-off	
Hawk Semi-	<u>623003100</u>
Automatic Discrete	
Wire Terminator	
Hawk Semi-	<u>623004900</u>
Automatic Discrete	
Wire Terminator	
for Rebuilt CE	
Approved*	
Hawk Flat Flex Cable	<u>623005200</u>
Terminator with	
Break-off	
Hawk Ribbon Cable	<u>623005300</u>
Terminator with	
Break-off	

This document was generated on 11/26/2018
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

14-56-3073