
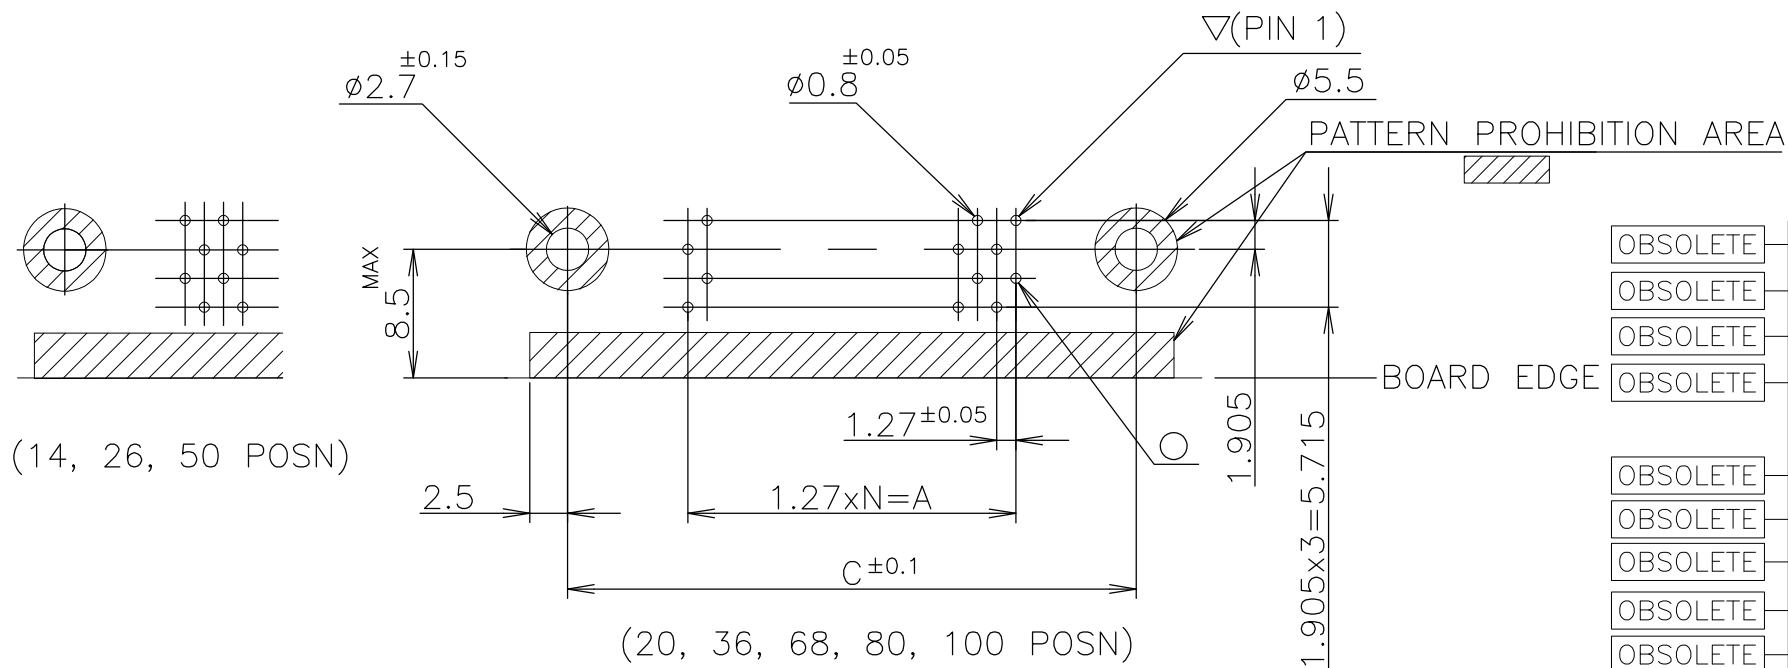
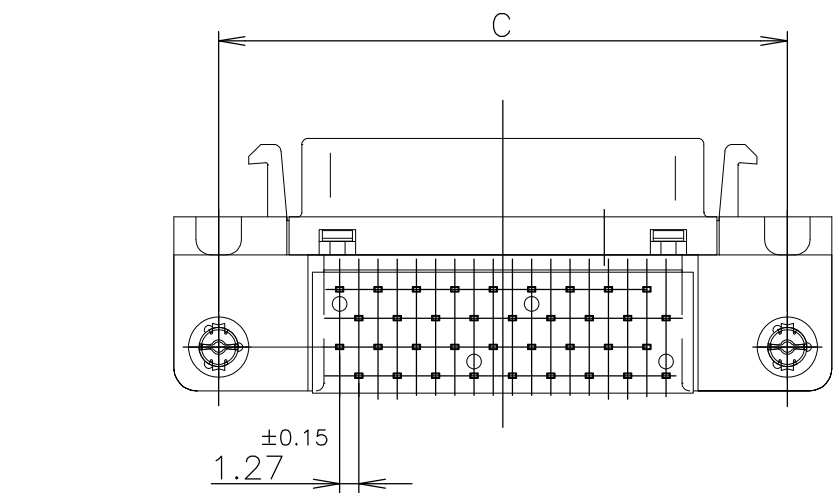
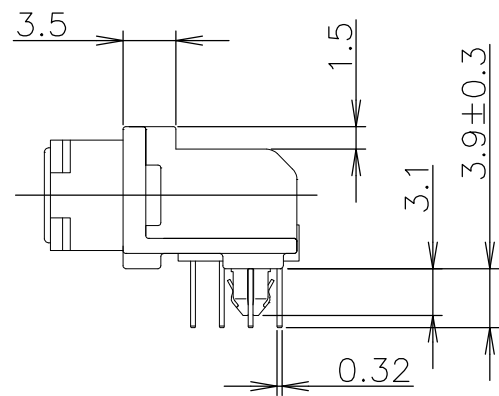
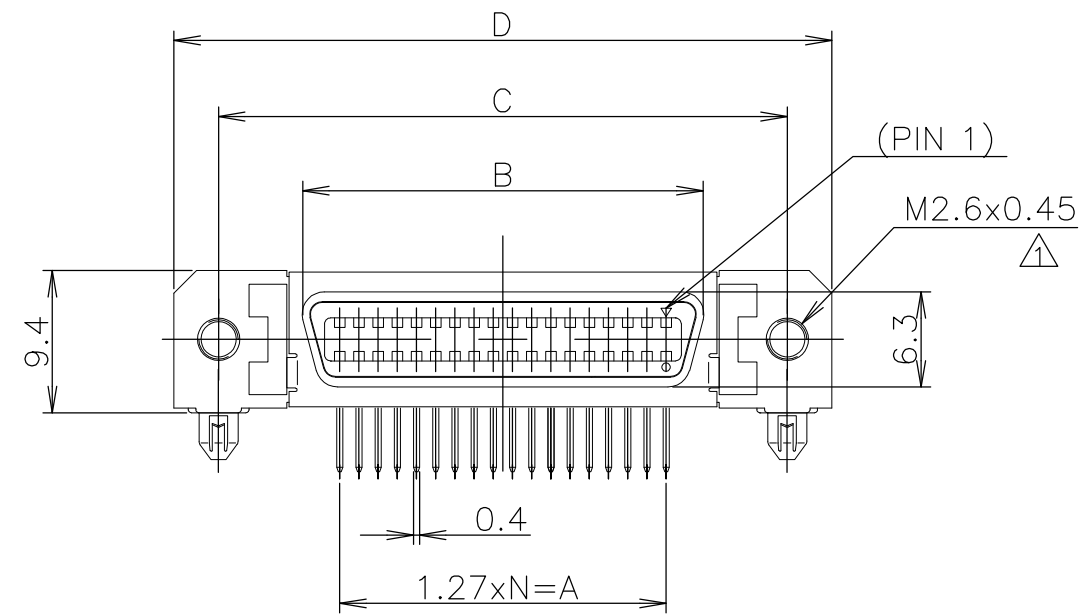
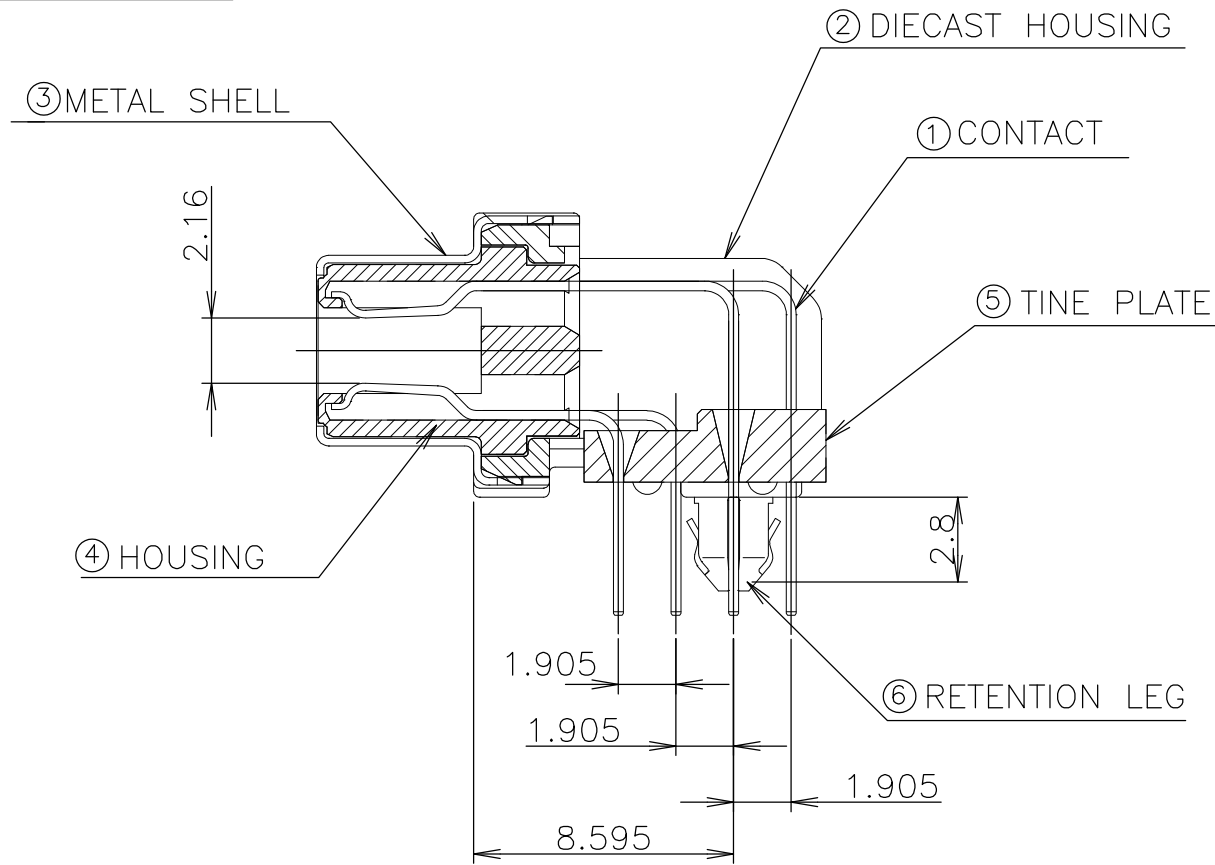



LOC J	DIST	REVISES 変更						
		P	LTR	DESCRIPTION		DATE	DWN	APVD
			E	REVISED ECO-12-012349		12MAR	BL	AC

ITEM	MATERIAL	FINISH
①	COPPER ALLOY	NICKEL UNDER PLATE ALL OVER CONTACT AREA ; Au(0.3u,0.76u) SOLDER TINE AREA ; TIN-LEAD PLATE
②	ZINC	NICKEL PLATING
③	STEEL t0.25	NICKEL PLATE OVER COPPER UNDERPLATE
④	THERMO-PLASTIC	COLOR; BLACK
⑤		
⑥	COPPER ALLOY	TIN-LEAD PLATE OVER NICKEL UNDERPLATE

- NOTES:
- △ RECOMMENDED SCREW SIZE ; M2.6 PANHEAD SCREW(L=5)
- 2 RECOMMENDED P.C BOARD THICKNESS ; 2.4mm (REF)
- 3 CONNECTOR TO BE MATED; 175677
- 4 INSERTION FORCE OF RETENTION LEG TO P.C.B; 2.2kg MAX/CONNECTOR.
- 5 RETENTIVITY OF RETENTION LEG TO P.C.B; 0.5kg MIN/CONNECTOR.

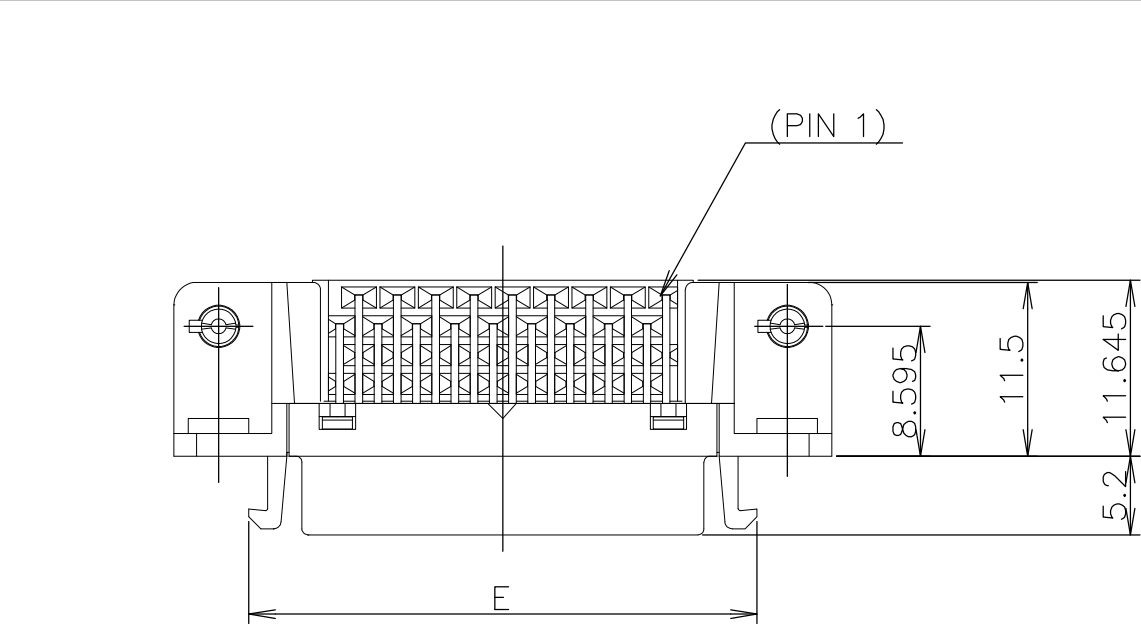

RECOMMENDED PC BOARD
MOUNTING DIMMENSION
(COMPONENT SIDE)

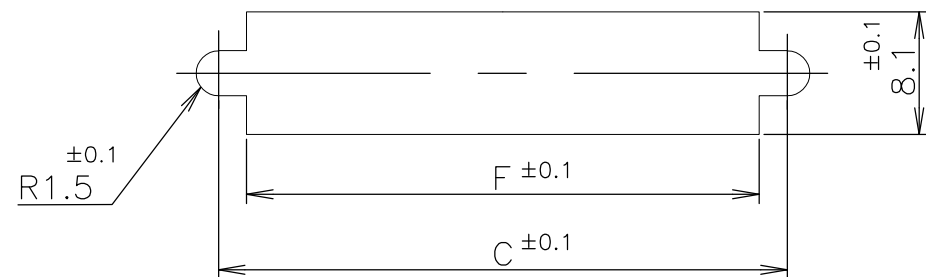

RECOMENDED PANEL CUTOUT
THK,2mm MAX

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
10>* : ±0.2
30>* >10 : ±0.25
100>* >30 : ±0.3
ANGEL : ±3

OBSOLETE	39	61.9	61.55	71.45	65.55	54.53	49.53	0.76u	80	3-178239-0
OBSOLETE	49	74.6	74.25	84.15	78.25	67.23	62.23	0.76u	100	2-178239-9
OBSOLETE	33	54.2	53.93	63.83	57.93	46.91	41.91	0.76u	68	2-178239-8
OBSOLETE	24	42.8	42.50	52.40	46.50	35.48	30.48	0.76u	50	2-178239-7
	17	33.9	33.61	43.51	37.61	26.59	21.59	0.76u	36	2-178239-5
OBSOLETE	12	27.6	27.26	37.16	31.26	20.24	15.24	0.76u	26	2-178239-4
OBSOLETE	9	23.8	23.45	33.35	27.45	16.43	11.43	0.76u	20	2-178239-2
OBSOLETE	6	19.9	19.64	29.54	23.64	12.62	7.62	0.76u	14	2-178239-1
OBSOLETE	39	61.9	61.55	71.45	65.55	54.53	49.53	0.3u	80	1-178239-0
OBSOLETE	49	74.6	74.25	84.15	78.25	67.23	62.23	0.3u	100	178239-9
OBSOLETE	33	54.2	53.93	63.83	57.93	46.91	41.91	0.3u	68	178239-8
OBSOLETE	24	42.8	42.50	52.40	46.50	35.48	30.48	0.3u	50	178239-7
OBSOLETE	17	33.9	33.61	43.51	37.61	26.59	21.59	0.3u	36	178239-5
OBSOLETE	12	27.6	27.26	37.16	31.26	20.24	15.24	0.3u	26	178239-4
OBSOLETE	9	23.8	23.45	33.35	27.45	16.43	11.43	0.3u	20	178239-2
OBSOLETE	6	19.9	19.64	29.54	23.64	12.62	7.62	0.3u	14	178239-1
	N	F	E	D	C	B	A	Au PLT.	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN H.KODAMA	22MAR91	 TE Connectivity					
				CHK Y.FUJIURA	01APR91						
DIMENSIONS: 単位： 耗 mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 一般公差		APVD Y.FUJIURA	01APR91	NAME 名称		RECEPTACLE HDR ASSY (3.9mm) RETENTION LEG TYPE STANDARD CHAMP.050 SERIES (II)			
		0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		PRODUCT SPEC 製品規格							
		± ± ± ± ± ±		APPLICATION SPEC 取付適用規格							
MATERIAL 材料		FINISH 仕上		WEIGHT		SIZE A2	CAGE CODE 00779	DRAWING NO 番号 C=178239		RESTRICTED TO	
SEE TABLE		SEE TABLE		CUSTOMER DRAWING				SCALE 尺度 2:1		SHEET 1 of 1	REV E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-178239-5](#)