

D

C

B

A

D





C

B

A

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT — By —	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	—		E4	REVISED	ECR-15-003916	11MAR2015
					TS	KB

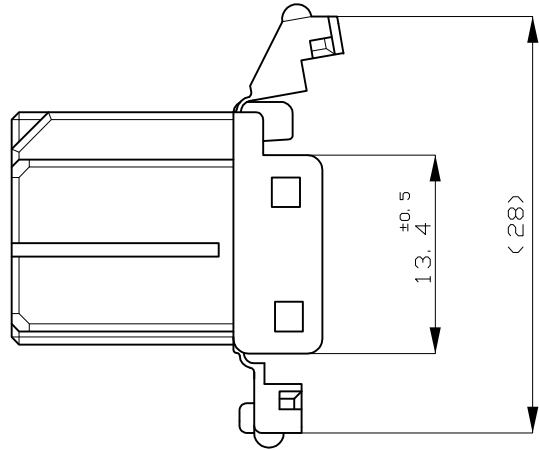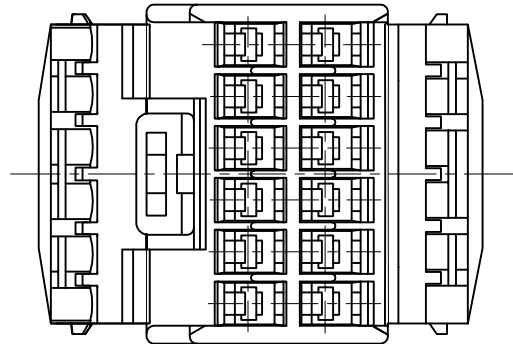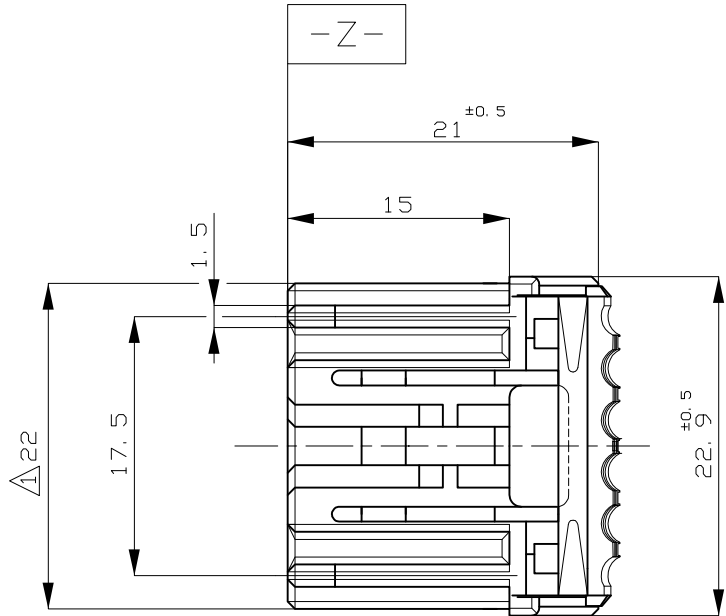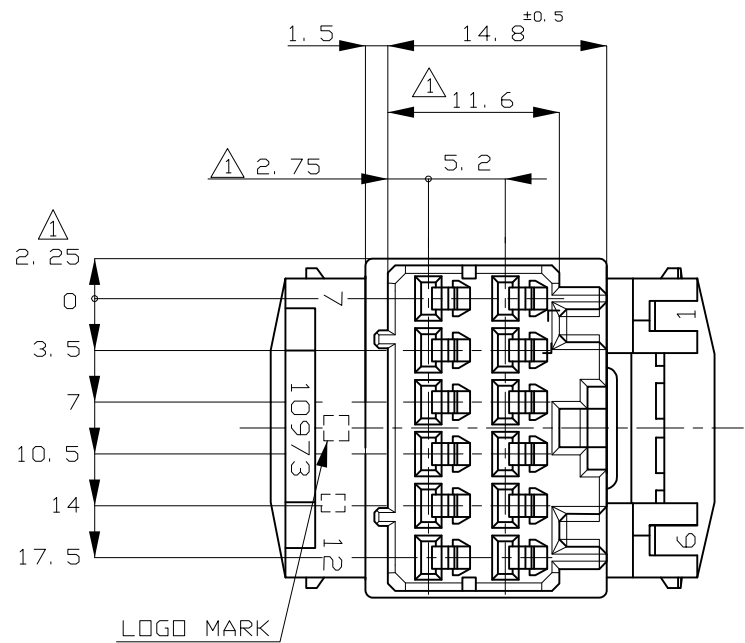

- NOTES;
- 1 MUST BE KEPT BETWEEN **-Z-** AND 2mm
 - 2 THE MATING CAP HSG. PART NUMBER; 175444, 175448
 - 3 APPLIED CONTACT P/N 173630, 173631
 - 4 APPLICABLE PRODUCT SPEC NO. 108-5280

- 注：
- 1 **-Z-**面より2mmの範囲で測定
 - 2. 嵌合相手ハウジング型番：175444, 175448
 - 3. 内装するリセプタクルコンタクト型番は173630, 173631
 - 4. 適用製品規格番号 108-5280

OBSOLETE	淡灰 (LIGHT GRAY)	6-175442-6
	灰色 (GRAY)	175442-6
OBSOLETE	青 (BLUE)	175442-5
	白 (WHITE)	175442-1
	色 (COLOR)	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.KADOSAKI 16JUN2005	TE Connectivity		
DIMENSIONS: 単位： 耗 mm		CHK T.SHINOHARA 16JUN05			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 16JUN05	NAME 名称 12Pos. PLUG HOUSING .040/.070 HYBRID I/O CONN. (POWER) 12極 プラグハウジング .040/.070 ハイブリッド I/O コネクタ (パワー用)		
0 PLC ±— 1 PLC ±— 2 PLC ±— 3 PLC ±— 4 PLC ±— ANGLES ±—		PRODUCT SPEC 製品規格			
APPLICATION SPEC 取付適用規格		WEIGHT	SIZE A3 CAGE CODE 00779 DRAWING NO C-175442 RESTRICTED TO —		
MATERIAL 材料 PBT		CUSTOMER DRAWING			
一般公差 (GENERAL TOLERANCE) 0<*≤ 10 : ±0. 2 10<*≤ 30 : ±0. 25 30<*≤100 : ±0. 3 ANGLES : ±3°		SCALE 尺度 2:1	SHEET 1 OF 1		REV E4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[175442-6](#)