



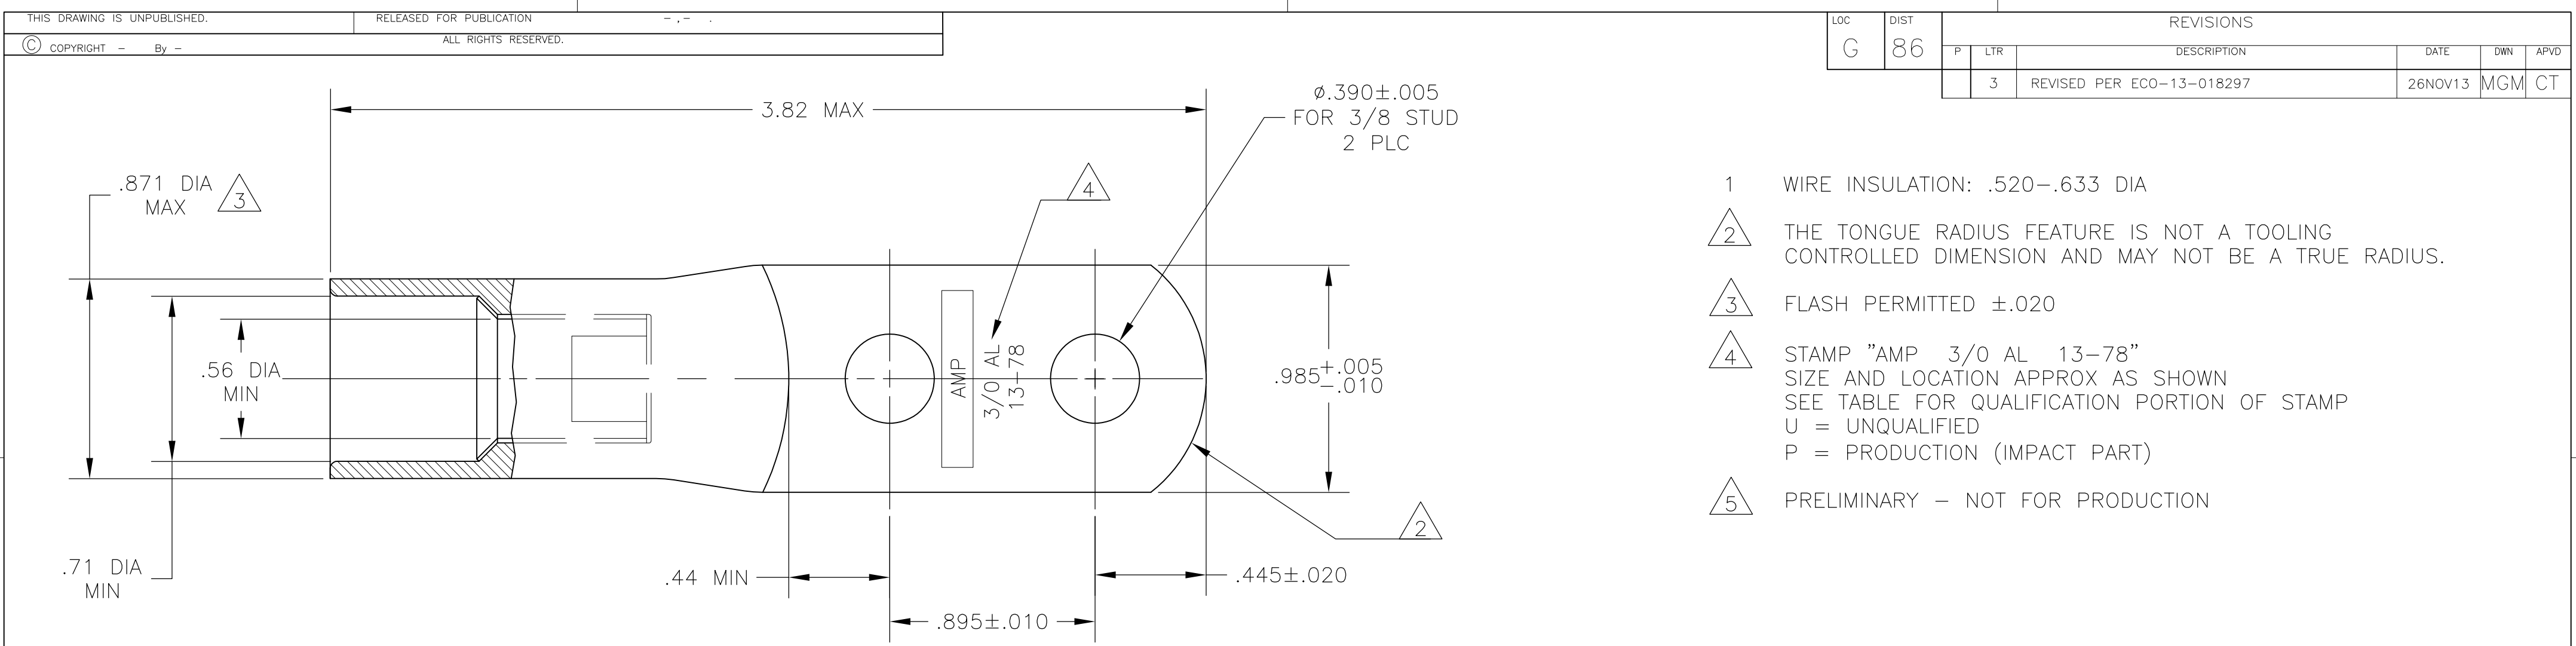

- 1 WIRE INSULATION: .520-.633 DIA
- 2 THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.
- 3 FLASH PERMITTED ±.020
- 4 STAMP "AMP 3/0 AL 13-78"
SIZE AND LOCATION APPROX AS SHOWN
U = UNQUALIFIED
P = PRODUCTION (IMPACT PART)
- 5 PRELIMINARY - NOT FOR PRODUCTION

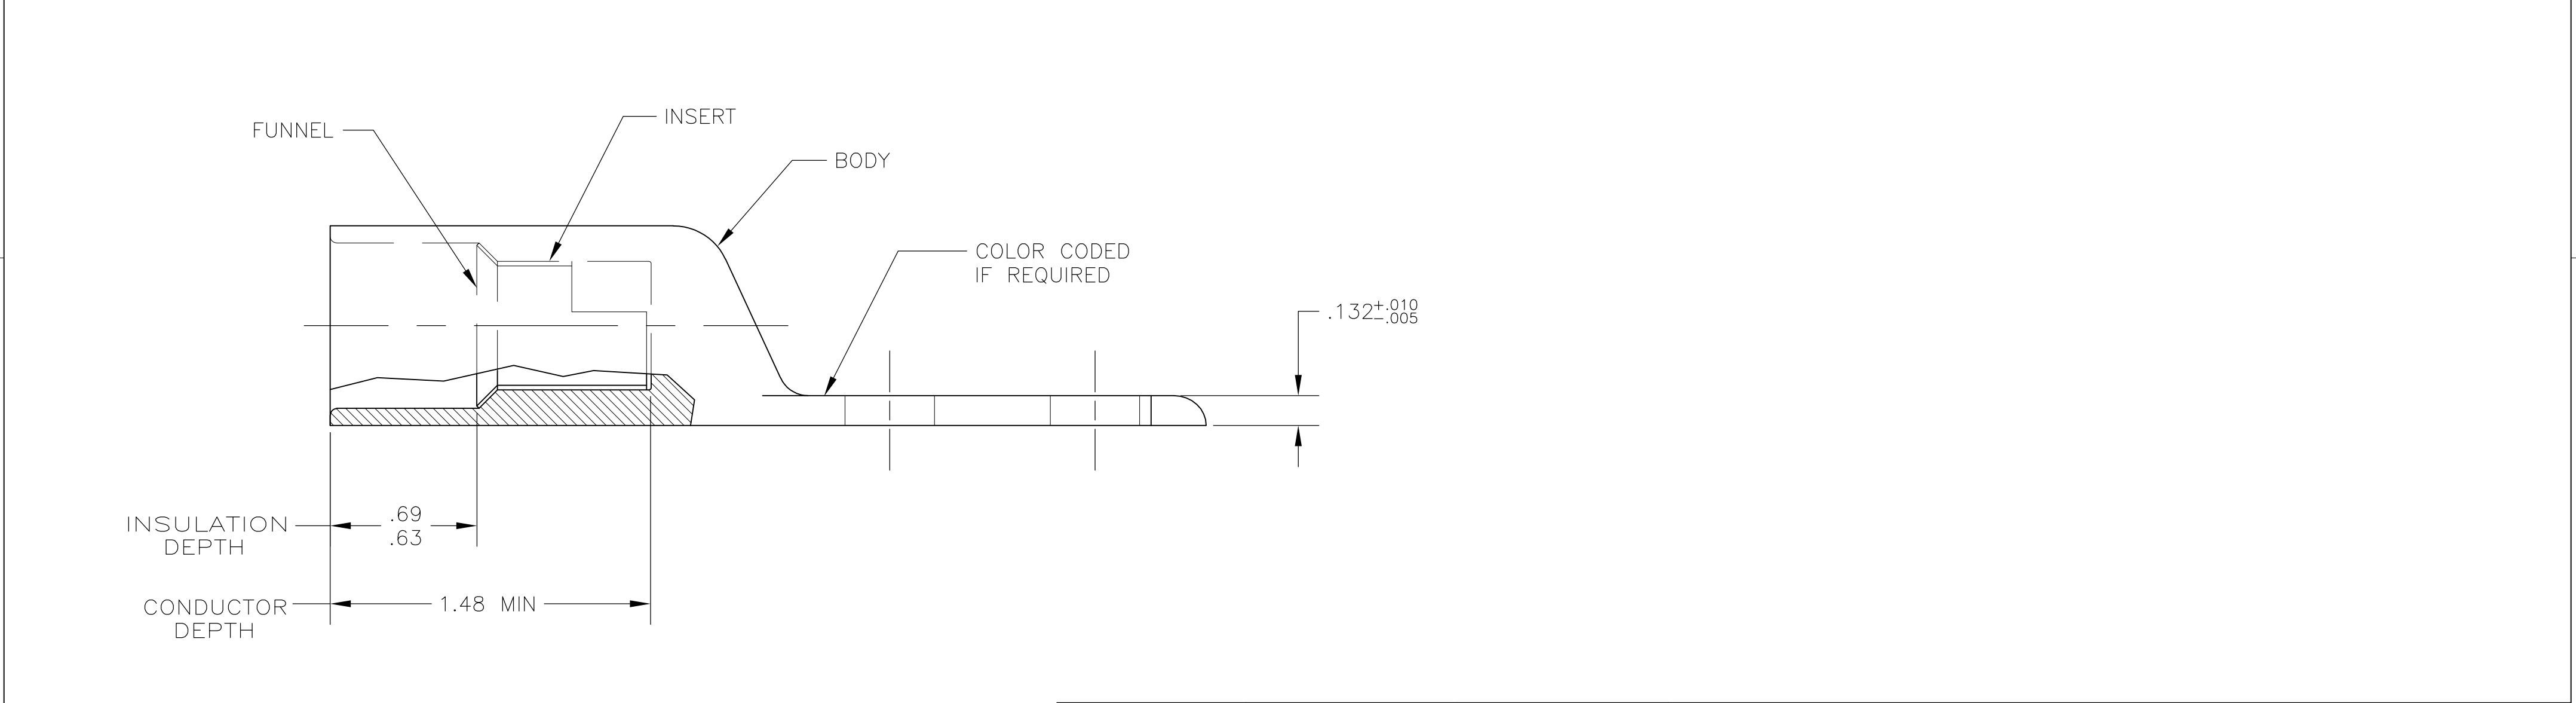

-	PRODUCTION AND QUALIFIED	P AMP	INSERT & FUNNEL: BRASS MIL-C-50 NICKEL PL QQ-N-290 .000300 AVG THK	5 696961-2
RED STRIPE	PRODUCTION AND UNQUALIFIED	P AMP U	BODY: COPPER ASTM-B187 ANNEALED TIN PL PER ASTM B-545 .000150 MIN THK	5 696961-1
COLOR CODE	QUALIFICATION DESCRIPTION 4	QUALIFICATION STAMP 4	MATERIAL & FINISH	PART NO.

1471-9 (3/11)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± .008
4 PLC	± -
ANGLES	± -

FINISH

SEE TABLE

DWN
JR RUTH

CHK
MJ SPICER

APVD
MJ SPICER

PRODUCT SPEC

APPLICATION SPEC

WEIGHT
111 GRAMS

CUSTOMER DRAWING

09MAY06

09MAY06

09MAY06

NAME

SIZE

CAGE CODE

DRAWING NO
A2 00779

RESTRICTED TO

SCALE
2:1

SHEET
1 of 1

REV
3

TE Connectivity

WIRE TERMINAL, COPALUM

SEALED, RING TONGUE,

WIRE SIZE: 3/0 ALUMINUM

696961