

## Plug-in card block - SKBI 32/D - 2261054

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in card block, Nominal current: 4 A, Number of positions: 32, Pitch: 5.08 mm, Connection method: Screw connection with tension sleeve, Color: green



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 017918 053826 |
| Weight per Piece (excluding packing) | 186.0 g   |
| Custom tariff number                 | 85369010  |
| Country of origin                    | Germany   |

### Technical data

#### Dimensions

|               |         |
|---------------|---------|
| Length        | 43 mm   |
| Height        | 138 mm  |
| Width         | 112 mm  |
| Pitch         | 5.08 mm |
| Hole diameter | 4.2 mm  |

#### General

|                                  |                     |
|----------------------------------|---------------------|
| Range of articles                | SKBI 32             |
| Connection in acc. with standard | EN-VDE              |
| Nominal current $I_N$            | 4 A                 |
| Nominal voltage $U_N$            | 250 V               |
| Nominal cross section            | 2.5 mm <sup>2</sup> |

## Plug-in card block - SKBI 32/D - 2261054

### Technical data

#### General

|                        |        |
|------------------------|--------|
| Stripping length       | 8 mm   |
| Screw thread           | M3     |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max  | 0.6 Nm |
| Number of positions    | 32     |

#### Connection data

|                                       |                     |
|---------------------------------------|---------------------|
| Conductor cross section solid min.    | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.    | 4 mm <sup>2</sup>   |
| Conductor cross section flexible min. | 0.2 mm <sup>2</sup> |
| Conductor cross section flexible max. | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG min.      | 24                  |
| Conductor cross section AWG max.      | 12                  |

#### Standards and Regulations

|                                  |        |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
|----------------------------------|--------|

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260710 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002642 |
| ETIM 5.0 | EC002780 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |

## Plug-in card block - SKBI 32/D - 2261054

### Classifications

#### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 39121409 |
|-------------|----------|

### Approvals

#### Approvals

---

Approvals

EAC / EAC

---

Ex Approvals

---

Approvals submitted

---

#### Approval details

|     |
|-----|
| EAC |
|-----|

|     |
|-----|
| EAC |
|-----|

### Accessories

#### Accessories

Foot element - SF-SKBI 31/32 - 2261009


Snap foot, for horizontal or vertical mounting of the SKBI plug-in card blocks, on the NS 35/7.5 DIN rail

---


### Drawings

# Plug-in card block - SKBI 32/D - 2261054

Dimensional drawing

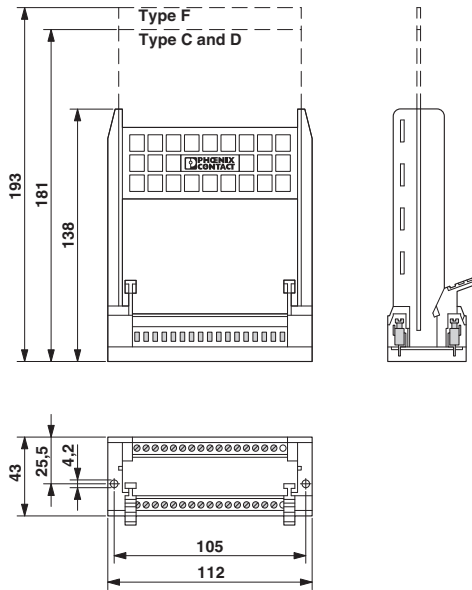

Schematic diagram

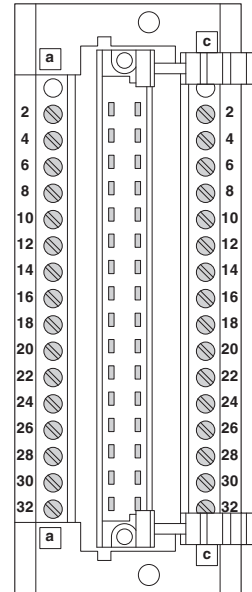

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[2261054](#)