


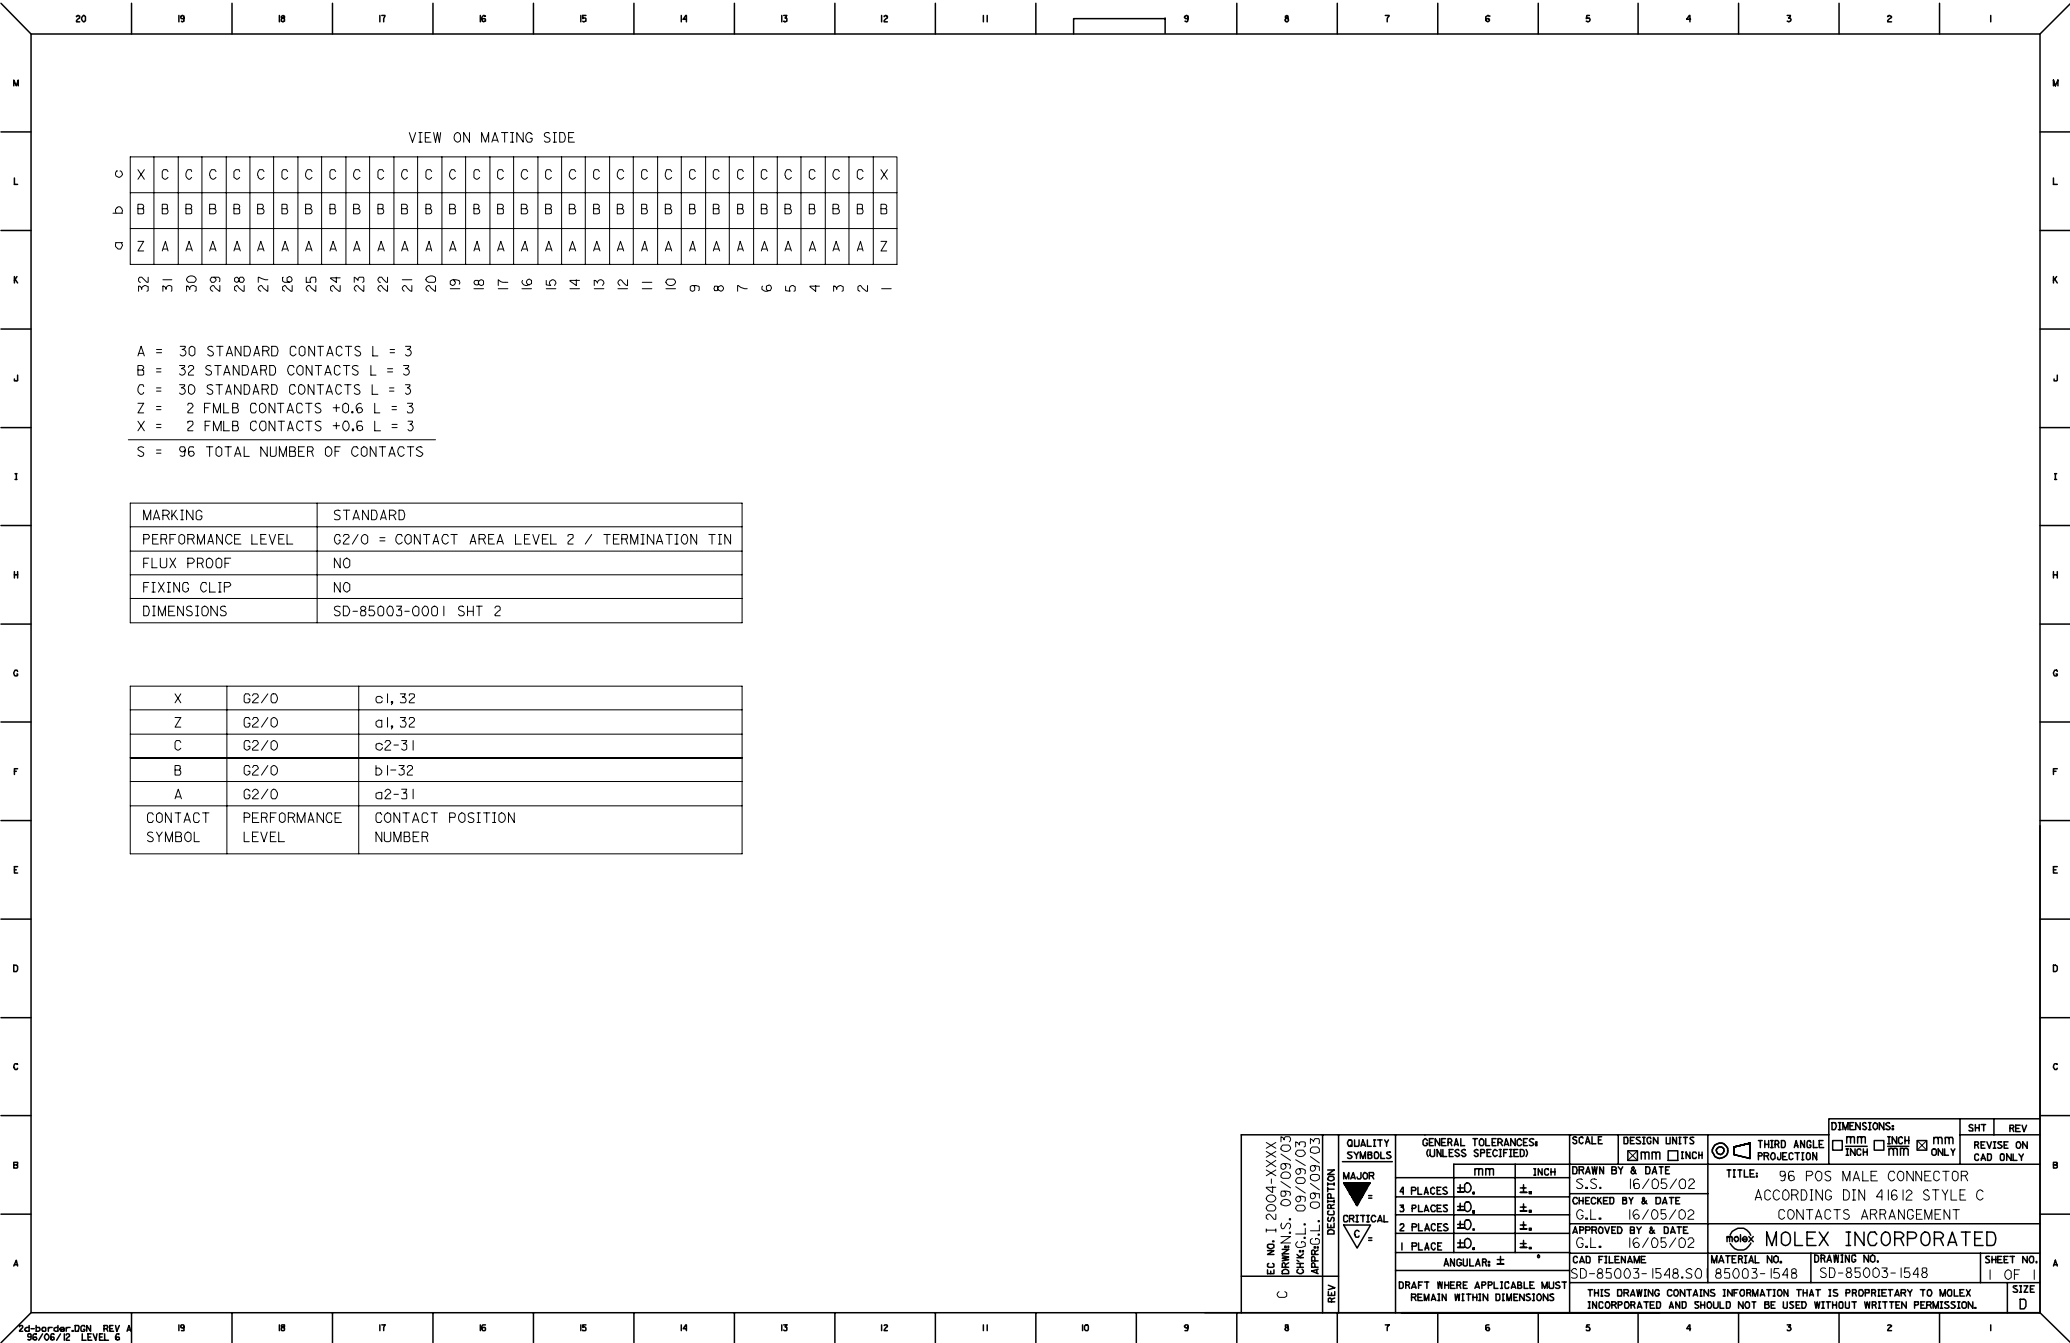

VIEW ON MATING SIDE

o	x	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	c	x		
b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b	b		
d	z	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	a	z		
	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2

A = 30 STANDARD CONTACTS L = 3
B = 32 STANDARD CONTACTS L = 3
C = 30 STANDARD CONTACTS L = 3
Z = 2 FMLB CONTACTS +0.6 L = 3
X = 2 FMLB CONTACTS +0.6 L = 3
S = 96 TOTAL NUMBER OF CONTACTS

MARKING	STANDARD
PERFORMANCE LEVEL	G2/O = CONTACT AREA LEVEL 2 / TERMINATION TIN
FLUX PROOF	NO
FIXING CLIP	NO
DIMENSIONS	SD-85003-0001 SHT 2

X	G2/O	a1, 32
Z	G2/O	a1, 32
C	G2/O	a2-31
B	G2/O	b1-32
A	G2/O	a2-31
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

EC NO. I 2004-XXXX DRAWN: S. 09/09/03 CHK: G.L. 09/09/03 APPR: G.L. 09/09/03 C		DESCRIPTION	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE	DESIGN UNITS ☒ mm ☐ INCH		THIRD ANGLE PROJECTION ☐ mm ☐ INCH ☒ mm ONLY	SHT	REV		
									DIMENSIONS:				
REV		REV		mm INCH		DRAWN BY & DATE S.S. 16/05/02		TITLE: 96 POS MALE CONNECTOR ACCORDING DIN 41612 STYLE C CONTACTS ARRANGEMENT		REVISE ON CAD ONLY			
				4 PLACES ±0.1 ±0.1		CHECKED BY & DATE G.L. 16/05/02							
				3 PLACES ±0.1 ±0.1		APPROVED BY & DATE G.L. 16/05/02							
				2 PLACES ±0.1 ±0.1									
				1 PLACE ±0.1 ±0.1				MOLEX INCORPORATED					
				ANGULAR ±		CAD FILENAME SD-85003-1548.S0		MATERIAL NO. 85003-1548		DRAWING NO. SD-85003-1548		SHEET NO. 1 OF 1	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.						SIZE D	