


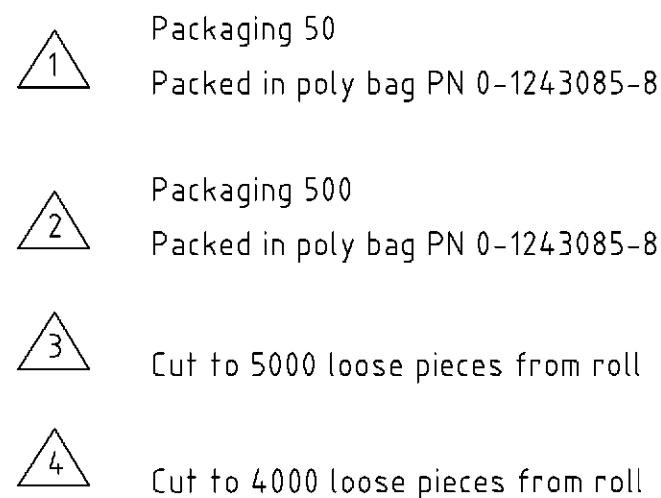

1 For crimp details see AMP-SPEC. 114-19.000
2 Meets productspecification 108-10042
5 0.40 max. gap between spring-nose and contact body.

500	50															Pin contact HD.M	Brass	tin plated	
		1														Pin contact HD.M		Brass	tin plated
			500	50												Pin contact HD.M		Brass	tin plated
					1											Pin contact HD.M		Brass	tin plated
						500	50									Pin contact HD.M		Brass	tin plated
								1								Pin contact HD.M		Brass	tin plated
									500	50						Pin contact HD.M		Brass	gold plated
											1					Pin contact HD.M		Brass	gold plated
												500	50			Pin contact HD.M		Brass	gold plated
														1		Pin contact HD.M		Brass	gold plated
4-9	4-3	4-5	2-9	2-3	2-5	1-8	1-3	1-6	3-9	3-2	3-5	1-9	1-2	1-5		DESCRIPTION / BENENNUNG	MATERIAL	SURFACE COLOR	
																HD.M-C-Sti.Au.0,3-0,56 mm ²			
																HD.M-C-Sti.Au.0,3-0,56 mm ²			
																HD.M-C-Sti.Au.0,3-0,56 mm ²			
																HD.M-C-Sti.Au.0,8-1,5 mm ²			
																HD.M-C-Sti.Au.0,8-1,5 mm ²			
																HD.M-C-Sti.Au.0,8-1,5 mm ²			
																HD.M-C-Sti.Sn.0,3-0,56 mm ²			
																HD.M-C-Sti.Sn.0,3-0,56 mm ²			
																HD.M-C-Sti.Sn.0,3-0,56 mm ²			
																HD.M-C-Sti.Sn.0,5-1,5 mm ²			
																HD.M-C-Sti.Sn.0,5-1,5 mm ²			
																HD.M-C-Sti.Sn.0,5-1,5 mm ²			
																HD.M-C-Sti.Sn.1,5-2,5 mm ²			
																HD.M-C-Sti.Sn.1,5-2,5 mm ²			
																HD.M-C-Sti.Sn.1,5-2,5 mm ²			

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. DIESSES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT. AENDERUNGEN, DIE DEM TECHNISCHEN FORTSCHRITT DIENEN, SIND VORBEHALTEN. DEN JEWELIGS LETZTGÜLTIGEN AENDERUNGSSTAND ERFAHREN SIE AUF ANFRAGE.		DWN Schneider		19.10.01		AMP		HTS Elektrotechnik	
DIMENSIONS: DIMENSIONEN: (mm)		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		CHK Shweiger		19.10.01		53819 Neunkirchen, Germany	
		n. ISO 8015 n. ISO 2768 - mH - E n. DIN 16901 - 140		APVD -		NAME Pin contact			
		0 PLC # 1 PLC # 2 PLC # 3 PLC #		PRODUCT SPEC PRODUKTSPEZ. -		Kontaktstift HD.M			
MATERIAL		ANGLES /WINKEL # FINISH /OBERFLÄCHE/FARBE		APPLICATION SPEC VERARBEITUNGSSPEZ. -		SIZE A3		CAGE CODE 00779	
				WEIGHT GEWICHT -		DRAWING NO ZEICHNUNGS-NR. C-1105000		RESTRICTED TO NUR FUER -	
				CUSTOMER DRAWING		/KUNDENZEICHNUNG		MASSSTAB 5:1	
						BLATT 1		OF VON 1	
								REV A4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1105000-2](#)