

COIL: @ +25 °C

RESISTANCE 2070 OHMS ± 10%

NOMINAL VOLTAGE 24.0 VDC

MUST OPERATE 17.5 VDC

MUST RELEASE 1.4 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 500 CPS @ 10 g's


SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE 6 MS MAX.

RELEASE 4 MS MAX.

CUSTOMER DATA SHEET

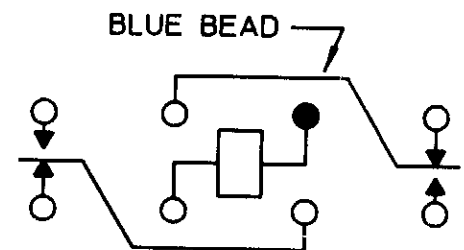

CONTACT RATING: 2 AMPS 30 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/30/94 CK. 8/30/94

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. HI-G

CUST. NO. FS3-2A-124P

TYPE "HFW" RELAY

HFW1201P303

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HFW1201P303](#)