
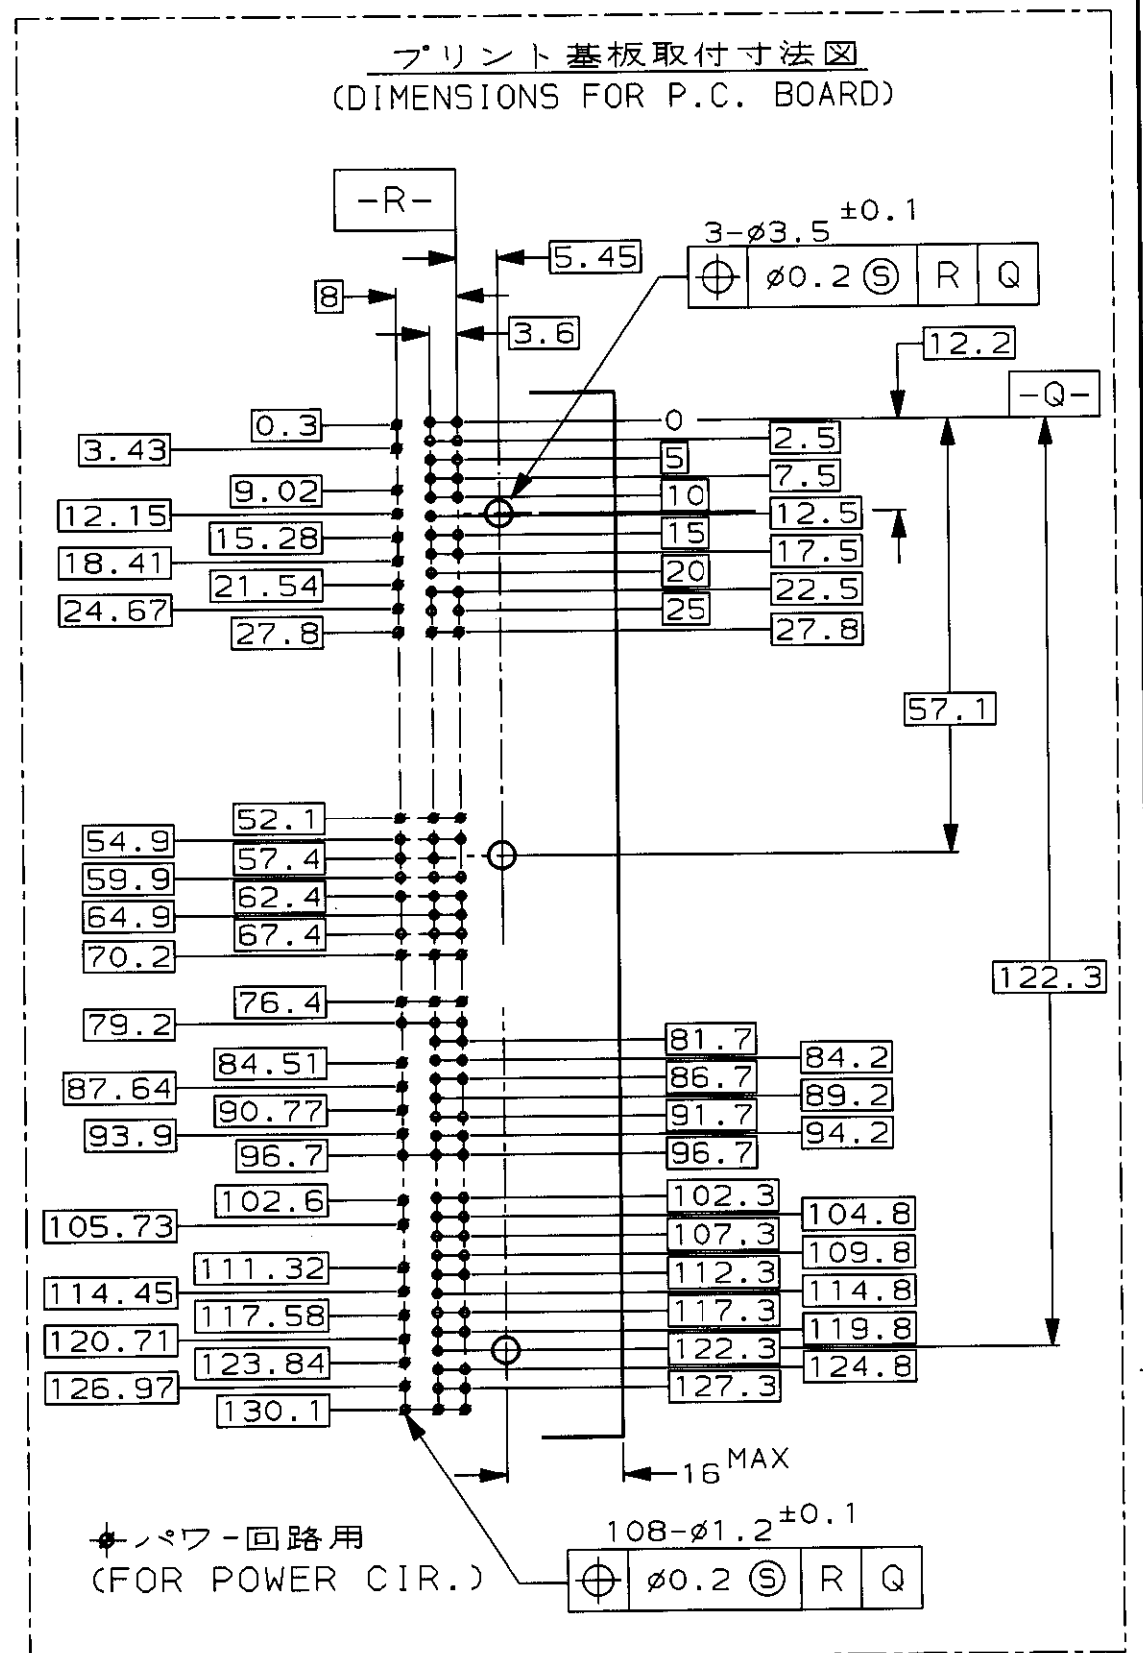
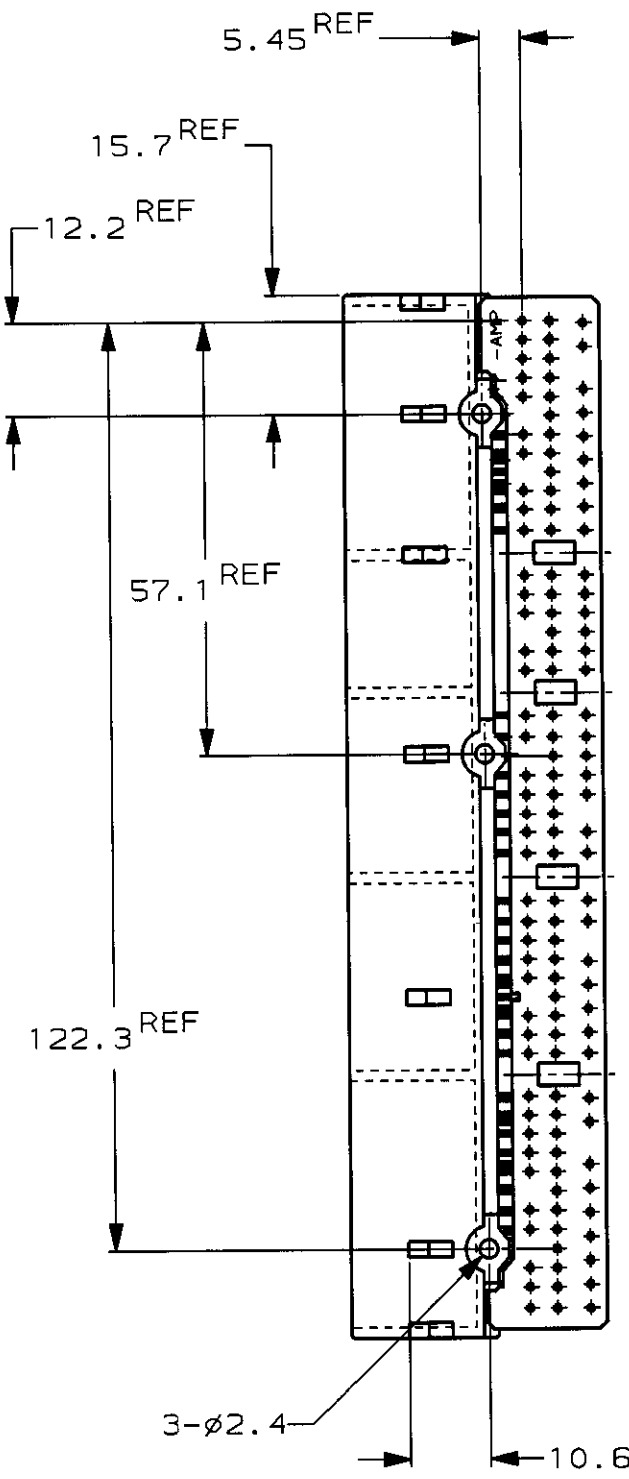
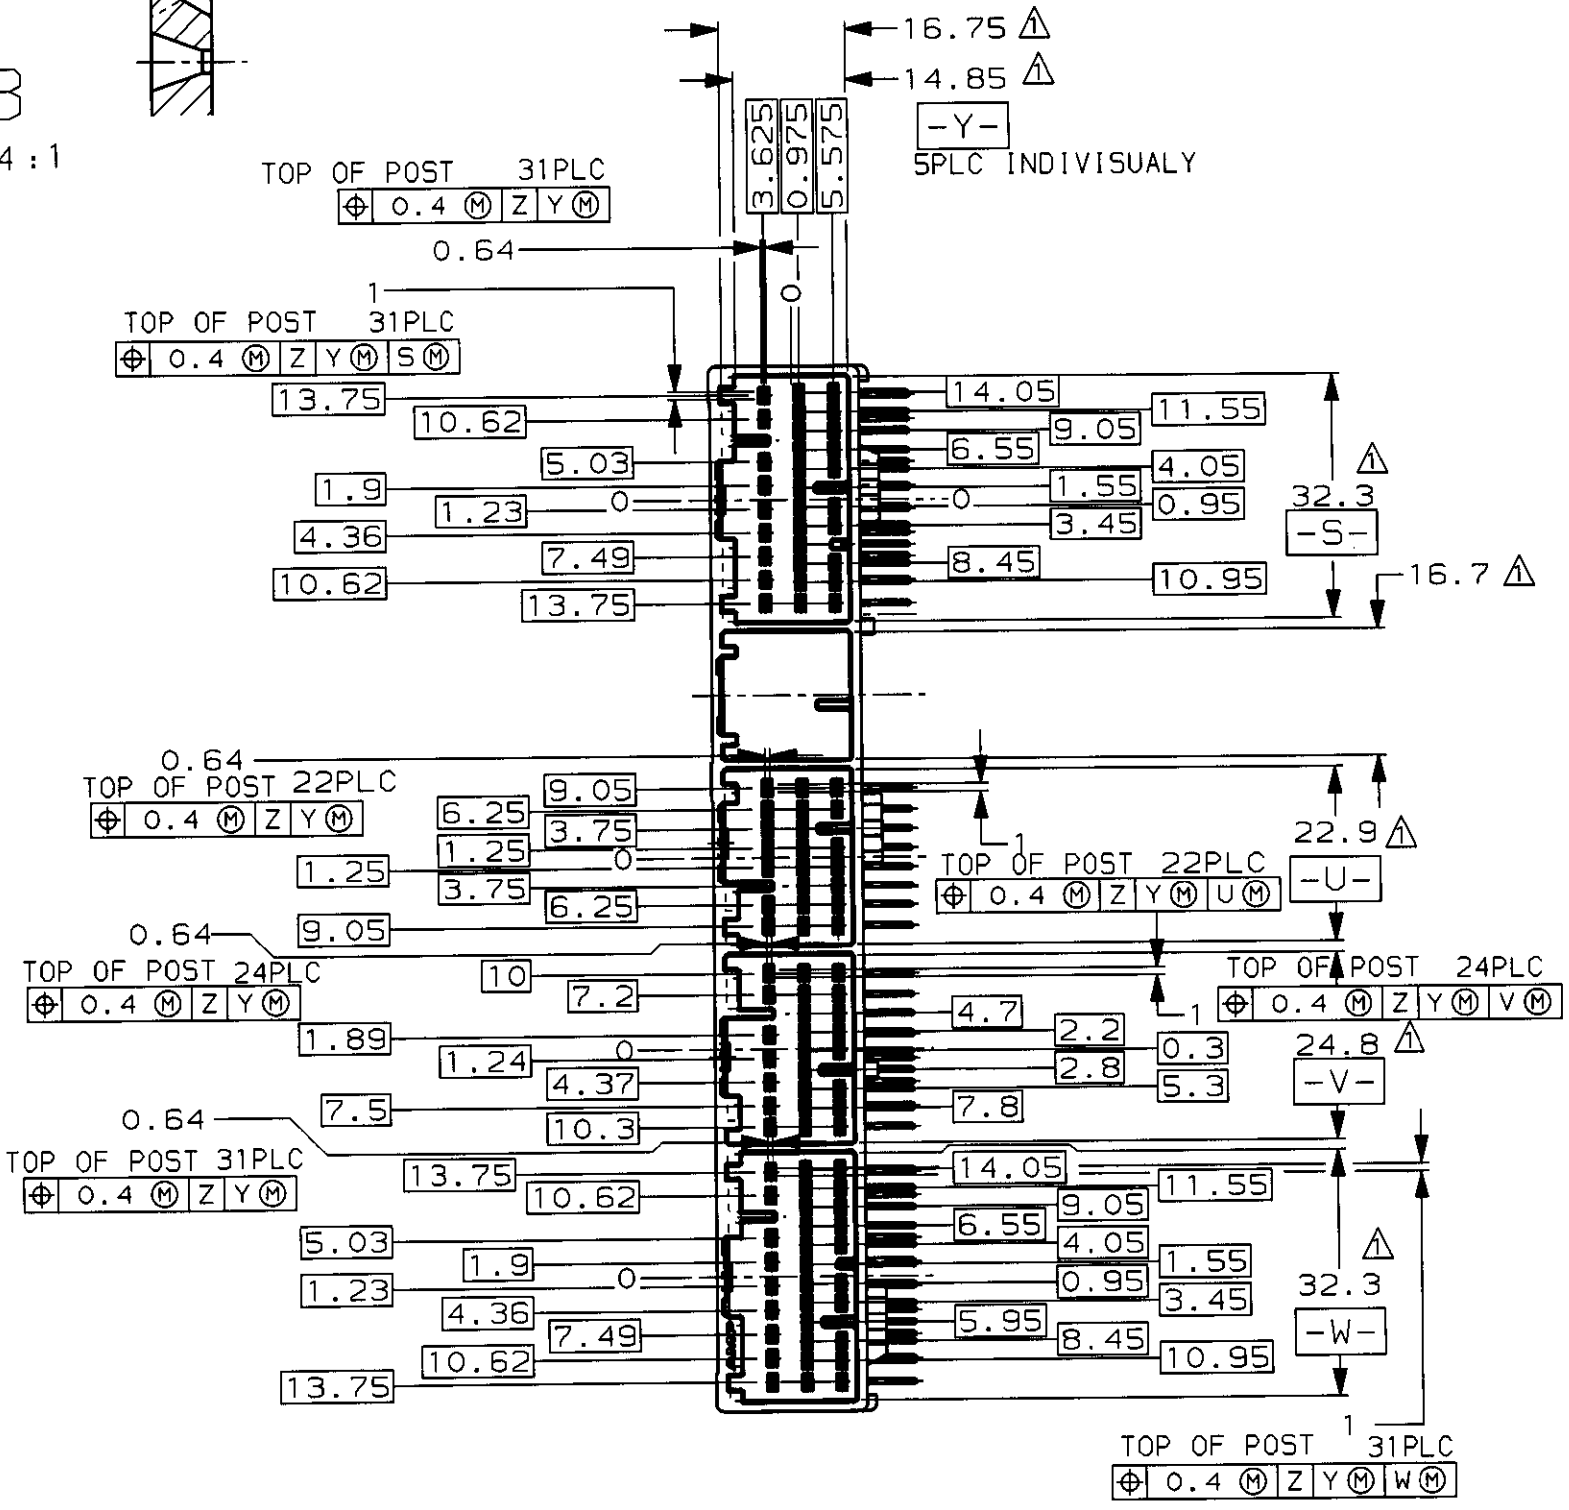
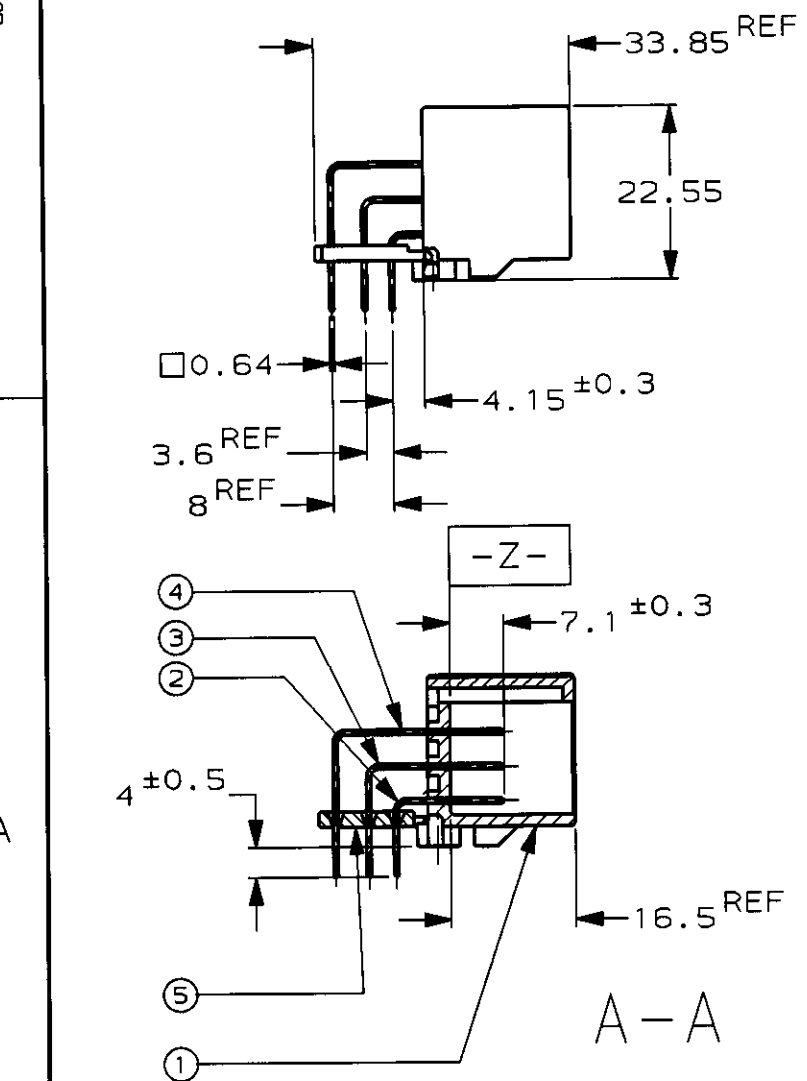


REVISIONS						
P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
0		DRAWN	FJ00-1684-99	30SEP99	YF	KO

/kcc/automotive/en32_automotive/u.098-0183/u.customer/s.c-1318613

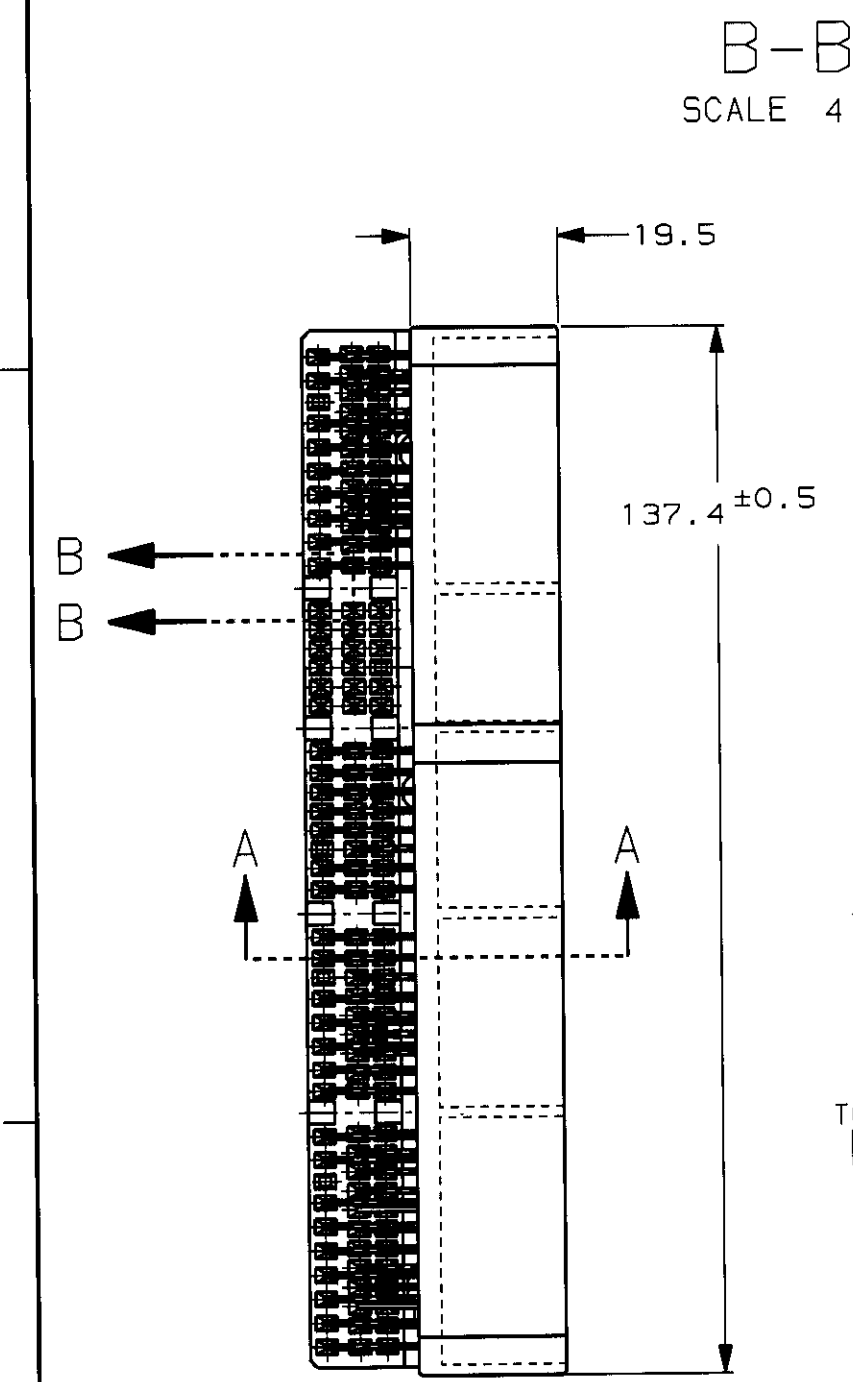

- ① Z面より7.5mmの位置で測定

② パワ-回路(35極); FIG 1 参照

③ 回路番号; FIG 1 参照

4. 嵌合相手ハウジング型番
22P; 353028
24P; 353029, 31P; 1318682, 353826

5. 推奨取付ねじ: JIS B1115、B1122
タッピングねじ、なべ2種、呼び径3、
長さ6以下

6. ねじ締付トルク: 0.392N・m MAX

7. 取扱説明書 411-5931
- ① MEASURED AT THE SECTION 7.5mm FROM Z.

② POWER CIRCUITS (35); SEE FIG 1

③ CIRCUIT NUMBERS; SEE FIG 1

4. PART NO OF PLUG HOUSINGS TO BE MATED
22P; 353028, 24P; 353029
31P; 1318682, 353826

5. RECOMMENDED SCREW: PAN-HEADED, TYPE 2
TAPPING SCREW OF 3DIA X 6LEN(MAX)
(JIS B1115, B1122).

6. FASTENING TORQUE FOR SCREW: 0.392N・m MAX.

7. INSTRUCTION SHEET 411-5931

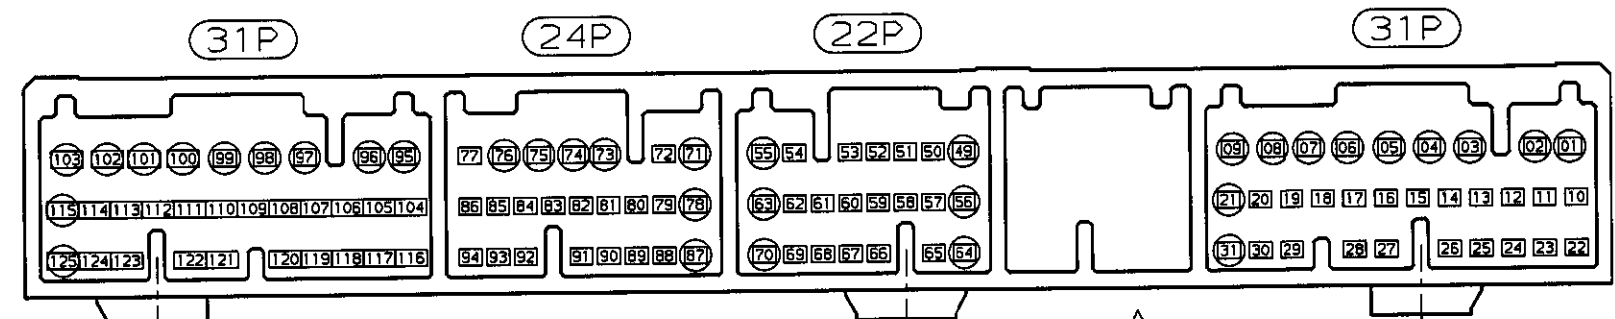


FIG 1 CIRCUIT NUMBERS (FOR POWER CIRCUIT)

NATURAL	PBT	TINE PLATE	1	⑤
PRE-TIN	COPPER ALLOY	TAB CONTACT (L)	32	④
PRE-TIN	COPPER ALLOY	TAB CONTACT (M)	41	③
PRE-TIN	COPPER ALLOY	TAB CONTACT (S)	35	②
NATURAL	PBT	CAP HOUSING	1	①
FINISH/COLOR	MATERIAL	NAME	QTY	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

Y.FUJIWALA
K.ODA
K.ODA

29SEP99
30SEP99
30SEP99

040 III HIGH DENSITY CONNECTOR
108POS CAP HOUSING ASSY

SIZE: A2
CAGE CODE: 00779
DRAWING NO: 1318613

WEIGHT: 39.8g

CUSTOMER DRAWING

AMP 日本エー・エム・ピー株式会社
Kawasaki, Japan

040 III HIGH DENSITY CONNECTOR
108POS CAP HOUSING ASSY

SIZE: A2
CAGE CODE: 00779
DRAWING NO: 1318613

WEIGHT: 39.8g

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1318613-1](#)