

REV. 1
DCO 170528

COIL: @ 25°C
 RESISTANCE $1000 \text{ OHMS} \pm 10\%$
 NOMINAL VOLTAGE 13.0 mADC
 MUST OPERATE 6.5 mADC
 MUST RELEASE $3.1 \text{ mADC MAX } 0.65 \text{ mADC MIN}$


ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 15 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 $^{\circ}\text{C}$ TO $+125$ $^{\circ}\text{C}$

NOTES:
 OPERATE TIME 15 MS MAX.
 RELEASE TIME 10 MS MAX.
 CONTACT BOUNCE 2 MS MAX.

CUST. QPL
 CUST. NO. M5757/13-137 REV.

3SAT RELAY

CUSTOMER DATA SHEET

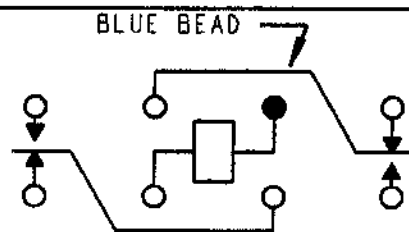

TERMINAL VIEW

CONTACT RATING:
 LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. PBB 12/6/00 CK. TLG 7-18-01

CII Technologies
 advanced control electronic solutions

3SAT1354A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SAT1354A2](#)