THIS DRAWING IS UNPUBLISHED.
VERTRAULICHE UNVEROEFFENTLICHTE ZEICHNUNG
© COPYRIGHT 1997 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
ALLE RECHTE VORBEHALTEN

RELEASED FOR PUBLICATION ,1997
FREI FUER VEROEFFENTLICHUNG

MATED WITH:
PASSEND ZU:
–

LOC	DIST
A1	–

PROJEKT NR.: –

REVISIONS
AENDERUNGEN

P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	A4	Tabelle überarbeitet EGD0-0027-05	10.01.05	SR	AR

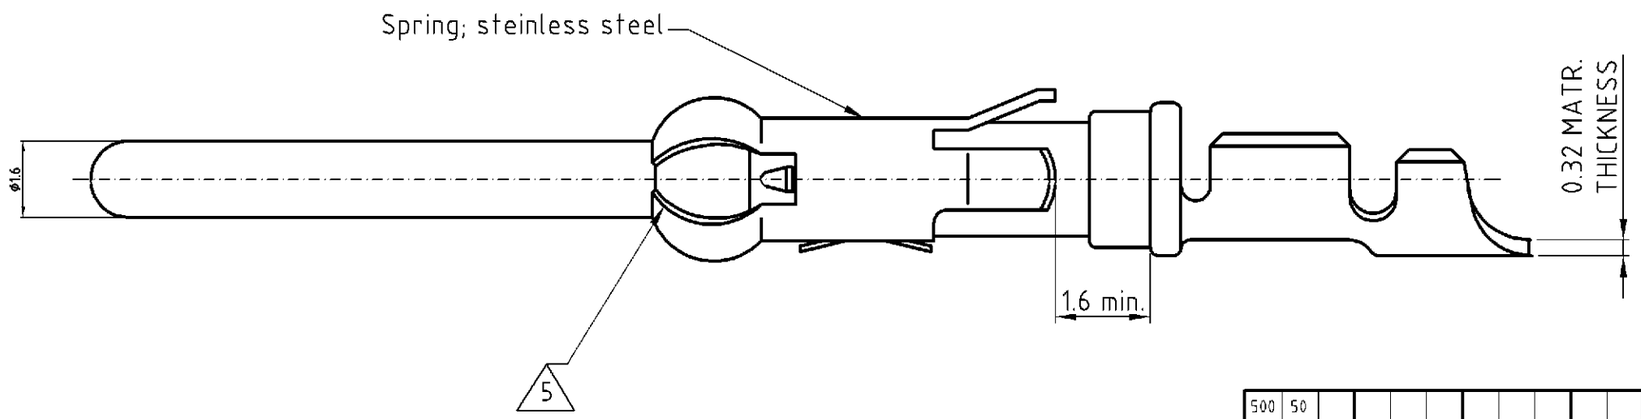

4-9	4-3	4-5	2-9	2-3	2-5	1-8	1-3	1-6	3-9	3-2	3-5	1-9	1-2	1-5	DESCRIPTION / BENENNUNG	MATERIAL	SURFACE COLOR
500	50														Pin contact HD.M	Brass	tin plated
		1													Pin contact HD.M △4	Brass	tin plated
			500	50											Pin contact HD.M	Brass	tin plated
					1										Pin contact HD.M △3	Brass	tin plated
						500	50								Pin contact HD.M	Brass	tin plated
								1							Pin contact HD.M △3	Brass	tin plated
									500	50					Pin contact HD.M	Brass	gold plated
											1				Pin contact HD.M △3	Brass	gold plated
												500	50		Pin contact HD.M	Brass	gold plated
														1	Pin contact HD.M △3	Brass	gold plated
														1	HD.M-C-Sti.Au.0,3-0,56 mm²		
													1		HD.M-C-Sti.Au.0,3-0,56 mm²		△1
												1			HD.M-C-Sti.Au.0,3-0,56 mm²		△2
											1				HD.M-C-Sti.Au.0,8-1,5 mm²		
										1					HD.M-C-Sti.Au.0,8-1,5 mm²		△1
									1						HD.M-C-Sti.Au.0,8-1,5 mm²		△2
								1							HD.M-C-Sti.Sn.0,3-0,56 mm²		
							1								HD.M-C-Sti.Sn.0,3-0,56 mm²		△1
						1									HD.M-C-Sti.Sn.0,3-0,56 mm²		△2
					1										HD.M-C-Sti.Sn.0,5-1,5 mm²		
				1											HD.M-C-Sti.Sn.0,5-1,5 mm²		△1
			1												HD.M-C-Sti.Sn.0,5-1,5 mm²		△2
		1													HD.M-C-Sti.Sn.1,5-2,5 mm²		
	1														HD.M-C-Sti.Sn.1,5-2,5 mm²		△1
1															HD.M-C-Sti.Sn.1,5-2,5 mm²		△2

△1 Packaging 50
Packed in poly bag PN 0-1243085-8

△2 Packaging 500
Packed in poly bag PN 0-1243085-8

△3 Cut to 5000 loose pieces from roll

△4 Cut to 4000 loose pieces from roll

Notes:

1 For crimpdeteils see AMP-SPEC. 114-19.000

2 Meets productspecification 108-10042

△5 0.40 max. gap between spring-nose and contact body.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.
DIESES ZEICHNUNGSDOKUMENT WIRD DURCH AMP INCORPORATED KONTROLLIERT.
AENDERUNGEN, DIE DEM TECHNISCHEN FORTSCHRITT DIENEN, SIND VORBEHALTEN.
DEN JEWEILS LETZTGUELTIGEN AENDERUNGSSTAND ERFAHREN SIE AUF ANFRAGE.

DIMENSIONS: DIMENSIONEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
ALLGEMEINTOLERANZEN
n. ISO 8015
n. ISO 2768 - mH - E
n. DIN 16901 - 140
0 PLC #-
1 PLC #-
2 PLC #-
3 PLC #-
ANGLES /WINKEL #-

MATERIAL

FINISH /OBERFLAECHE/FARBE

DWN Schneider 19.10.01
CHK Shweiger 19.10.01
APVD –
PRODUCT SPEC PRODUKTSPEZ. –
APPLICATION SPEC VERARBEITUNGSSPEZ. –
WEIGHT GEWICHT –

AMP
HTS Elektrotechnik
53819 Neunkirchen, Germany

NAME
Pin contact
Kontaktstift HD.M

SIZE	CAGE CODE	DRAWING NO ZEICHNUNGS-NR.	RESTRICTED TO NUR FUER
A3	00779	C-1105000	–

CUSTOMER DRAWING /KUNDENZEICHNUNG
MASSSTAB 5 : 1 BLATT 1 OF VON 1 REV A4

AMP 1470-19 REV 27JUN96
This is a TRANSLATED file from Computervision, Inc., Medusa Revision 12.2.5T

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

1-1105000-3