



|   | 8   |                             |  | 7   |                                |                                     | 6                                      | 5   |  | 4   |
|---|---|-----------------------------|--|---|--------------------------------|-------------------------------------|--|---|--|-----|
| - | THIS DRAWING IS UNPUBLISHED.                              | YCO ELECTRONICS CORPORATION | ELEASED FOR PUBLICATION<br>ALL INTERNATIONAL RIGHTS RESE<br>N. | — , — .<br>RVED.                          |                                |                                     |  |   |  |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
| D |   |                             |  |   |                                |                                     |  |   |  |     |
|   |   |                             | Detail1<br>Scale 5:1   |   |                                |                                     |  | Common F  | Contact  | AMA |
|   |   |                             |  | -   |                                |                                     |  | $ \begin{array}{c} 3 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0$ |  | K   |
|   |   | 2.5                         |  | _   |                                |                                     |  |   | 4  |     |
|   |   |                             | → Ø1.5   |   |                                |                                     |  |   | <b>_</b>   |     |
|   |   |                             |  | M 1                                       | 2X0.75 -                       |                                     |  | slot  | 18.5±0.5   |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
| С |   |                             | LAST DIGIT OF YEA<br>TO DECEMBER DA                            |   |                                | PRINTING OF                         | ING                                    |   |  |     |
|   |   |                             |  | DETAI                                     | 5                              | FTNOQO1                             | MODEL NO.                              |   |  |     |
|   |   |                             |  |   | <b>-</b> ► 13±0                | 6A AC 250V -<br>ON - ON             | SW. FUNCT.                             | $ 14.8\pm0.$  | 5 –  |     |
|   |   |                             | PANE   | L CUTOUT                                  |                                | NEL CUTOUT<br>JSING RING            |  |   |  |     |
|   |   |                             |  | <i>√ ø</i> 6.2                            |                                | ¢6.2                                | NUT<br>5                               | RING<br>6   | L WASHER   |     |
|   |   |                             | 2.5  |   | (                              | 6.2                                 |  |   | 12 Ø11   |     |
| В |   |                             |  |   |                                |                                     | <del>-</del> 8 <b>-</b>  <br>1.5 Thick | 1 THICK   | 0.63 THICK   |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
|   |   |                             |  |   |                                |                                     |  |   |  |     |
|   |   |                             |  |   |                                | 1                                   |  |   |  |     |
|   | C3602BD<br>Ep-Cu/Ni3,Au1b Ep                              | C3602BD<br>b—Cu/Ni3,Au1b    | 6-6437630-8  | FTN09G04                                  | 20V AC/DC<br>0.4 VA MAX        | MAX 10 MILLIOHMS<br>AT DC 2~4V 0.1A | - MIN                                  |   | ELECTRICALLY<br>50,000 CYCLES AT 20 CYCLES/MIN   |     |
| A | 99,8% Silver<br>+ C3602BD<br>Ep-Cu/Ni3,AuFb <sup>Ep</sup> | C3602BD<br>Ep-Cu/Ni3,Aufb   | 4-6437630-2 FT<br>4-6437630-6 FT                               | FTPA0904<br>FTN0904<br>FTP0904<br>FTS0904 | 04 AC 125V 6A<br>04 AC 250V 6A |                                     | 1000 M 01                              | AC 1KV/1 Min<br>(AC 1.2KV/1 SEC)  | (RATED LOAD RESISTIVE)<br>MECHANICALLY<br>100,000 CYCLES AT 20 CYCLES/MIN                |     |
|   |   |                             | 4-6437630-4<br>4-6437630-1                                     | FTR0904<br>FTT0904                        | AC 125V 6A<br>AC 250V 6A       |                                     | MIN<br>1000 M Ohms<br>AT DC 500V       | AC 1KV/1 Min<br>(AC 1.2KV/1 SEC)  | ELECTRICALLY<br>30,000 CYCLES AT 20 CYCLES/MIN<br>(RATED LOAD RESISTIVE)<br>MECHANICALLY |     |
|   | F CONTACT   | COMMON                      | TE PN  | PART                                      | RATING                         | INITIAL<br>CONTACT RESISTANCE       | INSULATION                             | DIELECTRIC  | 50,000 CYCLES AT 20 CYCLES/MIN<br>ENDURANCE  | _   |
| - | CONTACT MATERIAL  |                             |  |   | CONTROL INLOIDIAINCE           |                                     | STRENGHT<br>FICATIONS                  |   |  |     |
| L | 4805 (1/08)   |                             |  |   |                                |                                     |  |   |  |     |








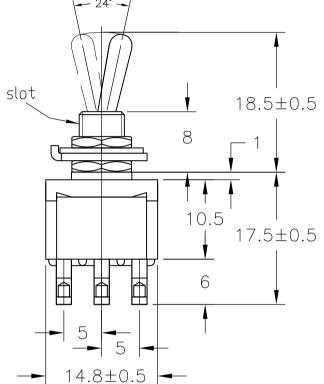




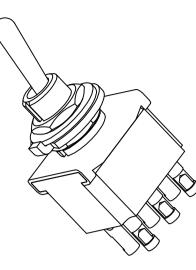

| r |                   |
|---|-------------------|
|   | THIS DRAWING IS , |
|   | DIMENSIONS:       |
|   | mm                |
|   |                   |

| 1 | 0.5VA | NO   | SWITCH  |
|---|-------|------|---------|
| 2 | OPERA | ting | ; TEMPE |

|         |   | IN |
|---------|---|----|
|         |   |    |
| 4-64376 | ŝ | 3( |
| 4-64376 | ŝ | 3( |
| 4-64376 | ŝ | 3( |
| 4-64376 | ĉ | 3( |
| 4-6437  | 6 | 3  |
| 4-64376 | ŝ | 3( |
| 6-64376 | 6 | 3( |

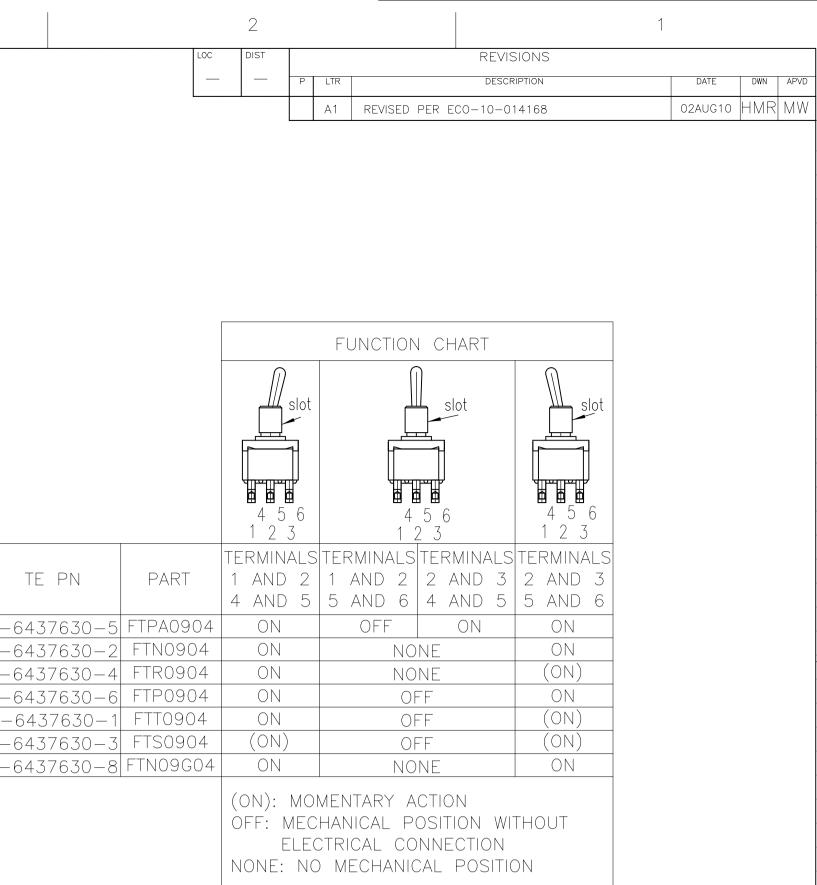

I FUNCTION WILL BE MARKED BUT WILL BE MARKED GOLD CON

PERATURE -20°C TO +70°C

3 ALL MATERIALS AND FINISHES COMPLY WITH ROHS DIRECTIVE

|  | MATERIALS CHART  |                                  |  |  |               |  |  |  |
|--|--|----------------------------------|--|--|---------------|--|--|--|
|  | Ep-Fe/Cu2,Ni4b   | SK-                              | - 5  | l Washer                                   | 7             |  |  |  |
|  | Ep-Fe/Cu2,Ni3b   | SPC                              | C  | RING                                       | 6             |  |  |  |
|  | Ep-Cu/Ni3b   | C3602                            | 2BD  | NUT  | 5             |  |  |  |
|  | Ep-Cu/Ni3,Cr1b   | C3602                            | 2BD  | ACTUATOR                                   | 4             |  |  |  |
|  | Ep-Cu/Ni3b   | C3602                            | 2BD  | BUSHING                                    | 3             |  |  |  |
|  |  | SUS                              | S  | FRAME                                      | 2             |  |  |  |
|  |  | POLYESTER                        | r resin  | CASE                                       | 1             |  |  |  |
|  | OPTIONAL DESCRIPTIO  | N MATERIAL/S                     | SURFACE  | PART NAME                                  | PART NO       |  |  |  |
|  |  | PART LIST                        |  |  |               |  |  |  |
| AWING IS A CONTROLLED DOCUMENT.  DWN 02AUG10  RAGHAVENDRA  CHK 02AUG10  MICHAEL WILBOURN |  |                                  | TycoTycoElectronicsCorporationElectronicsHarrisburg, PA 17105-3608 |  |               |  |  |  |
|  | IDLERANCES UNLESS<br>OTHERWISE SPECIFIED:     APVD       0     PLC     ±       1     PLC     ±       2     PLC     ± | 02AUG10<br>IAEL WILBOURN<br>SPEC | name<br>T  | OGGLE SWITCH F-SERIES DF<br>STANDARD LEVER | 0             |  |  |  |
| Ψ <u> </u>   | 3 PLC     ± _     APPLICA       4 PLC     ± _  | TION SPEC                        |  | DRAWING NO<br>C=1968511                    | RESTRICTED TO |  |  |  |
|  | CUST   | JMER DRAWING                     |  |  | OF REV A 1    |  |  |  |

В

D

С

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: FTP0904