
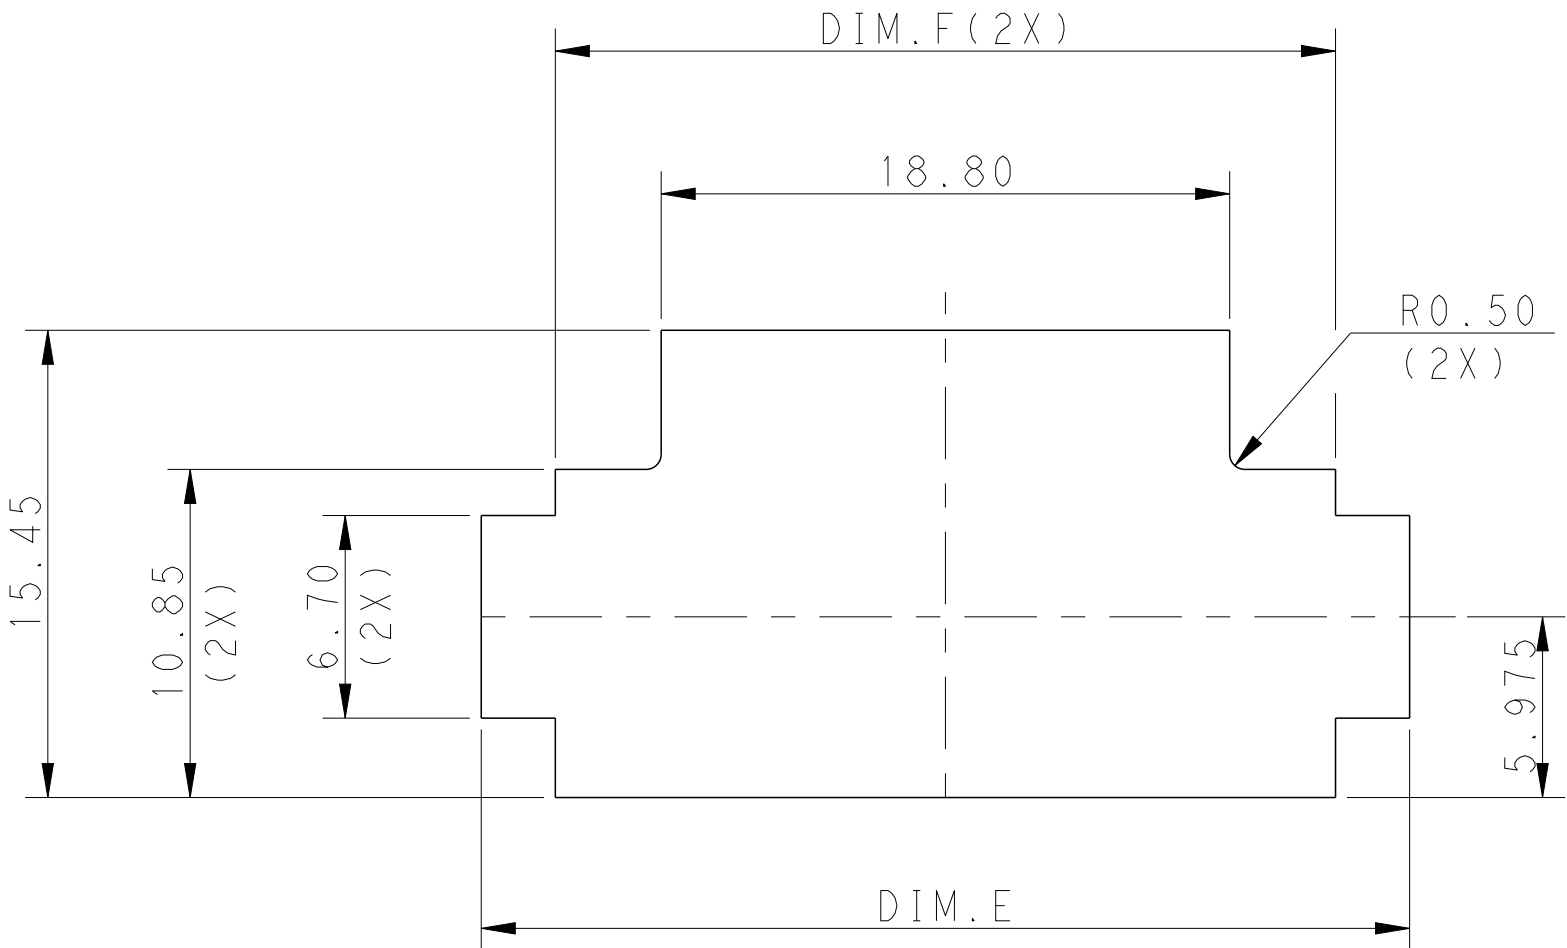


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | C   | REVISED PER ECR-16-003314 | 18JUL2016 | BW  | GJ   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

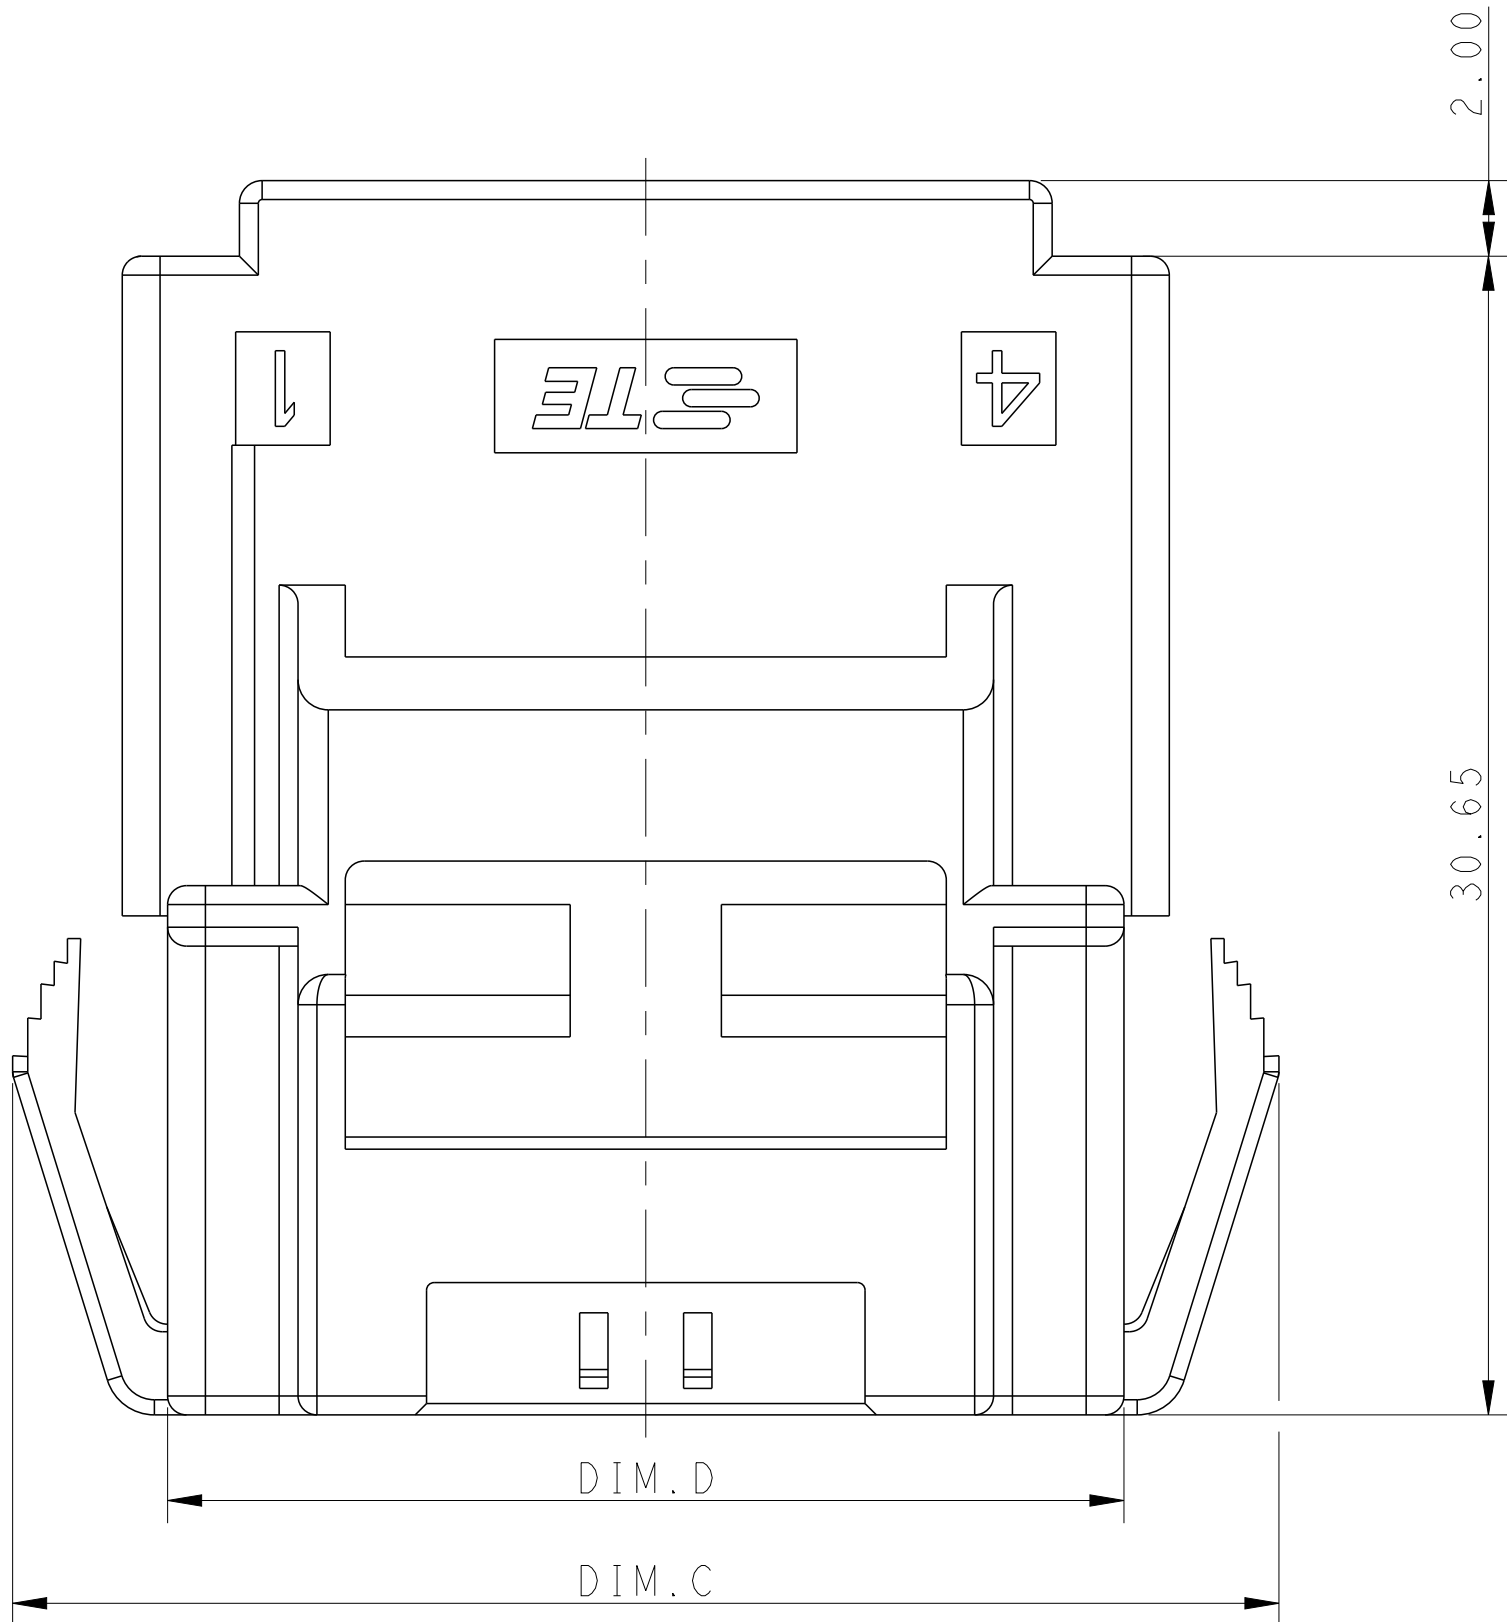

RECOMMENDED PANEL OPENING DIMENSIONS  
FOR CAP HOUSING 1\*5 AND 1\*4 POSITIONS  
(TOLERANCE: ±0.15mm)






⚠ MATERIAL:  
LEVEL A:PA6 GLASS FILLED, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT),UL 94V-0  
LEVEL B:PBT GLASS FILLED, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

⚠ MATERIAL MARK:  
LEVEL A:GWT,LEVEL B:HWT


3 APPLICABLE CONTACT P/N  
TAB CONTACT:1971238/1971780/1971782/1971784/1971786/1971788-\*,2238067-\*

4 MATING CONN, P/N  
PLUG HSG: \*-2232265-  
TPA (LOCK PLATE): \*-1971777-\*

5 RECOMMENDED PANEL THICKNESS:1.0~2.0mm

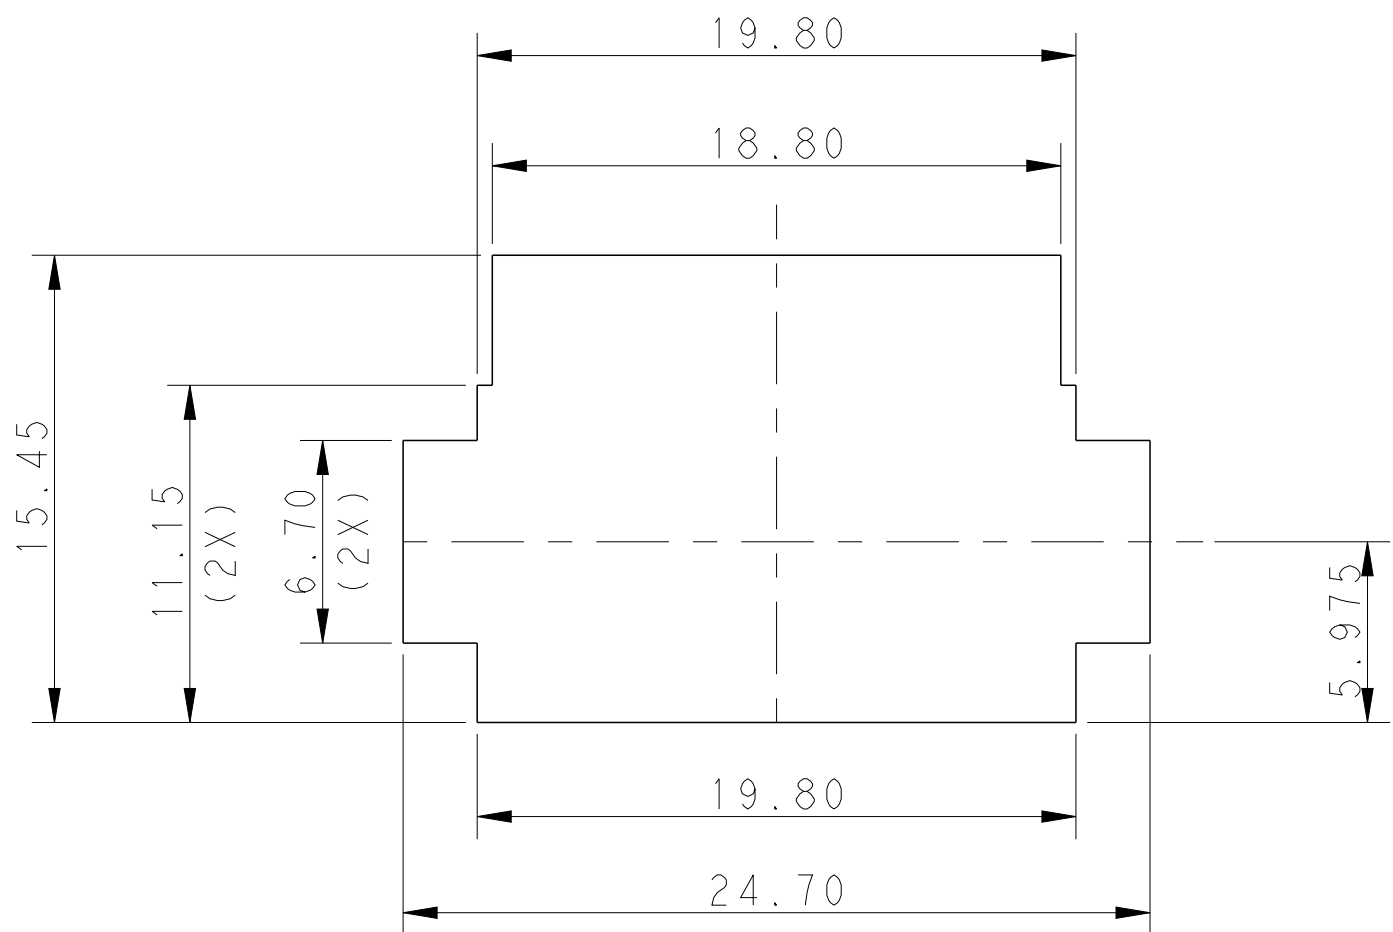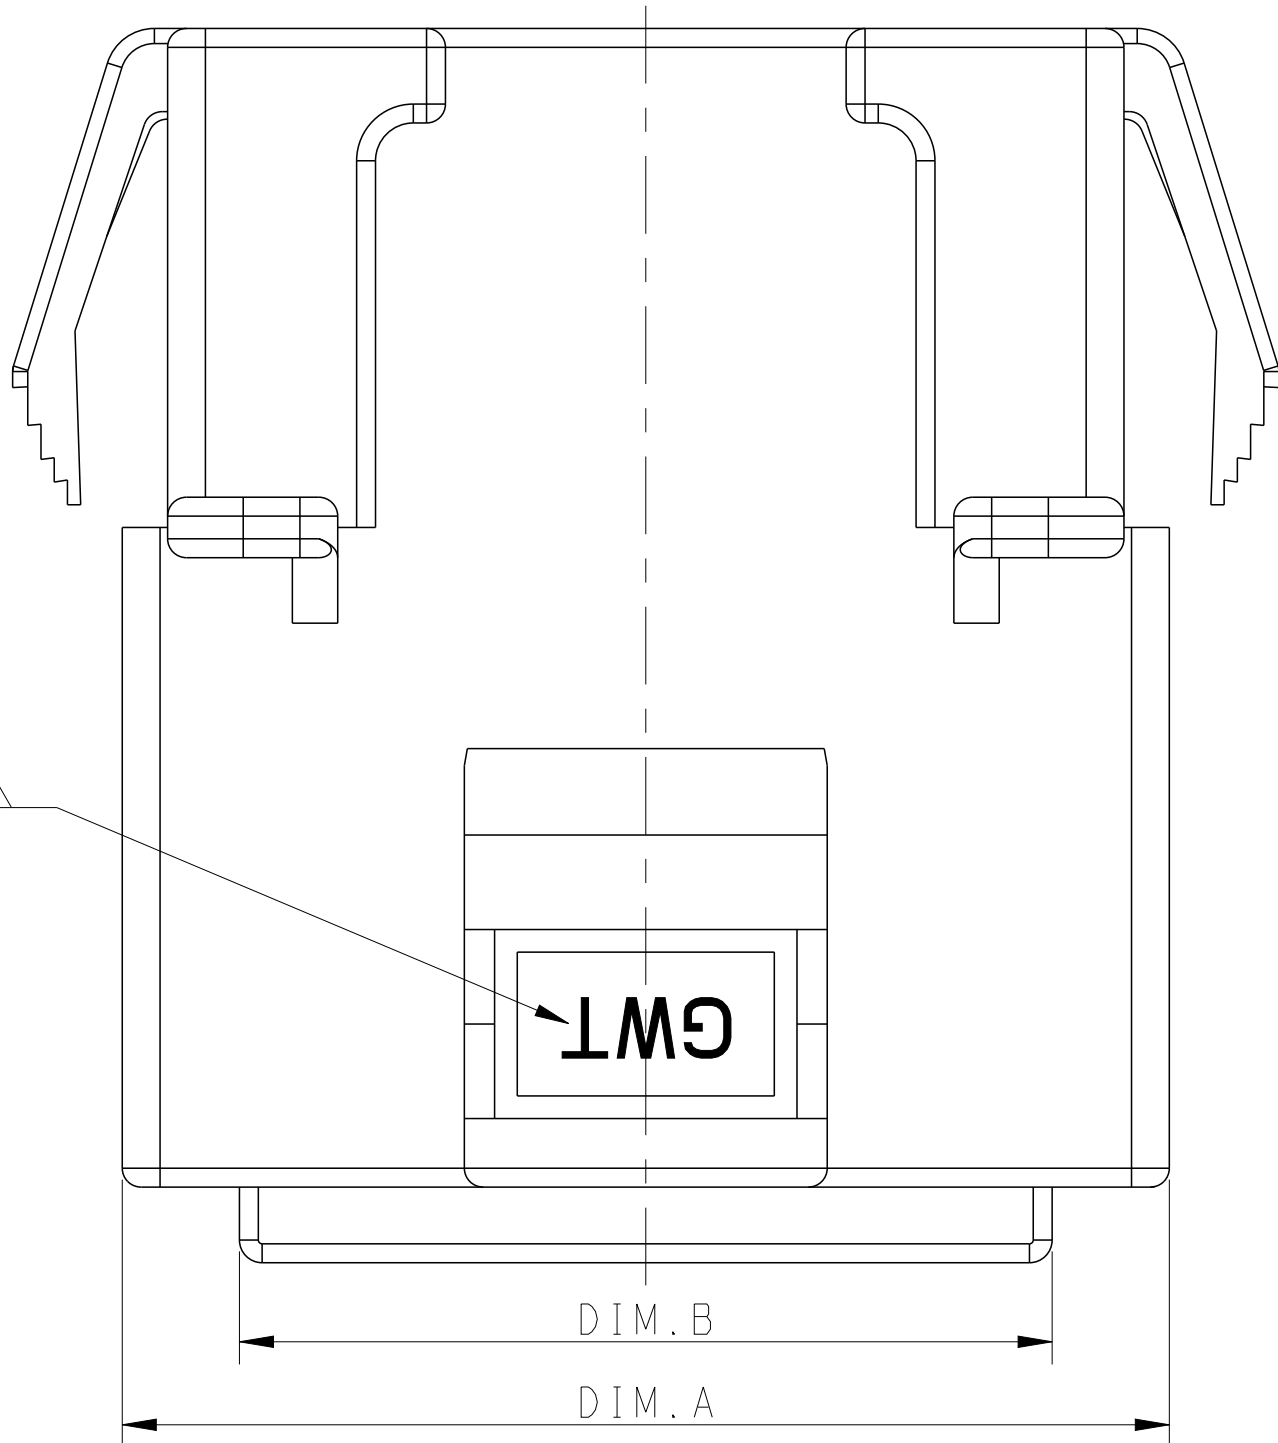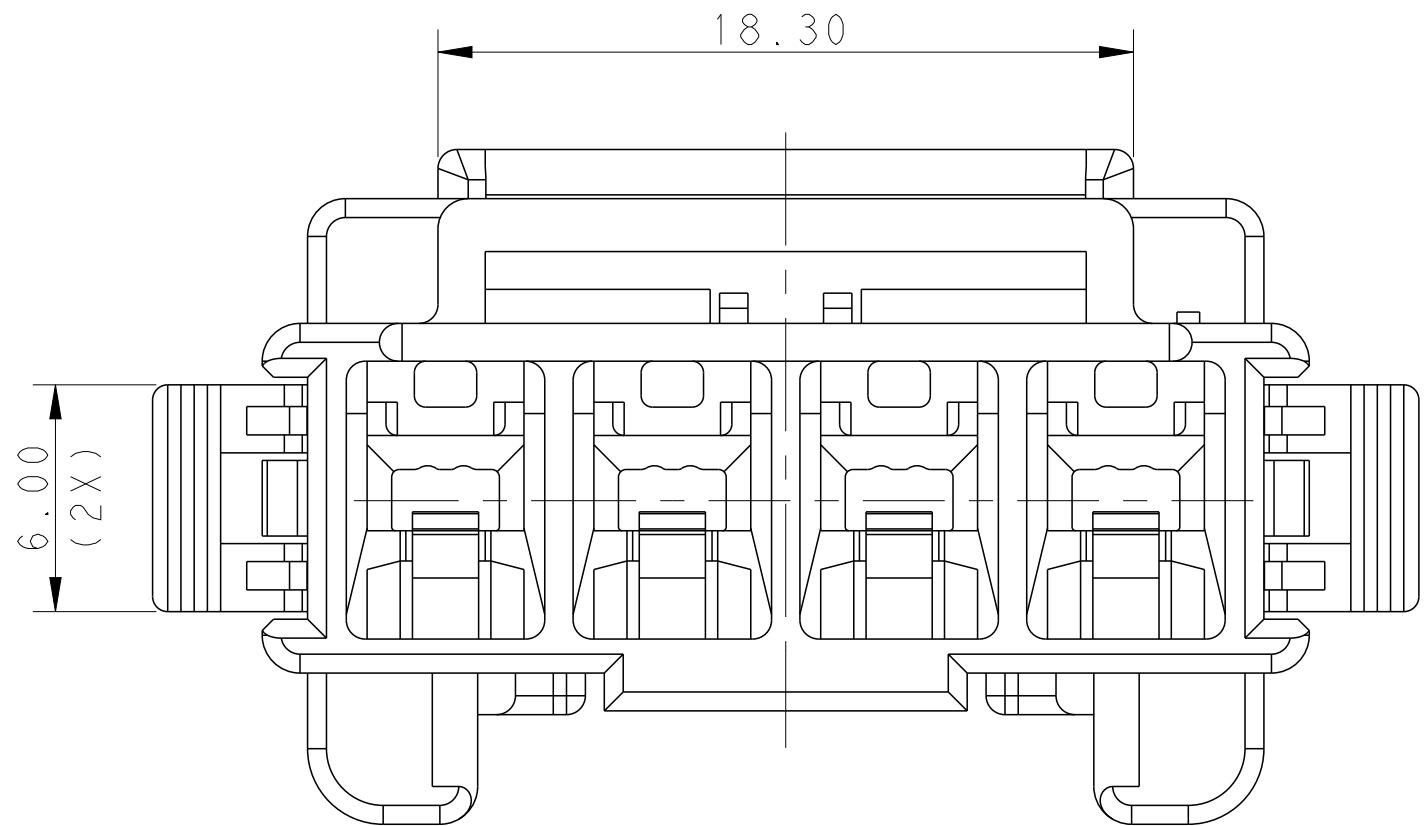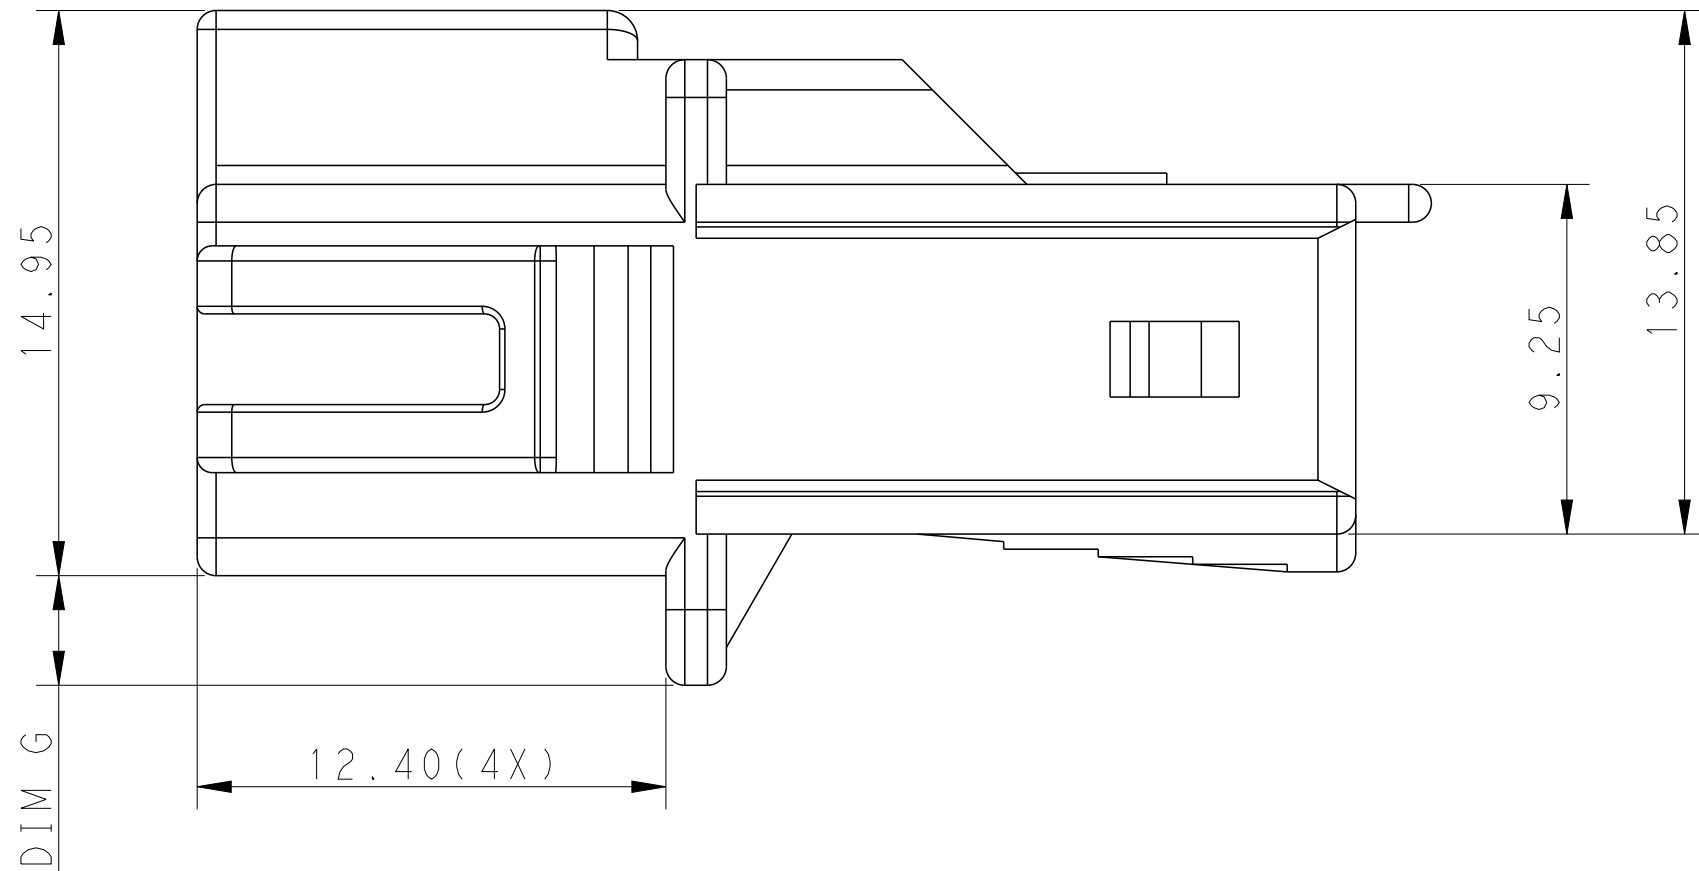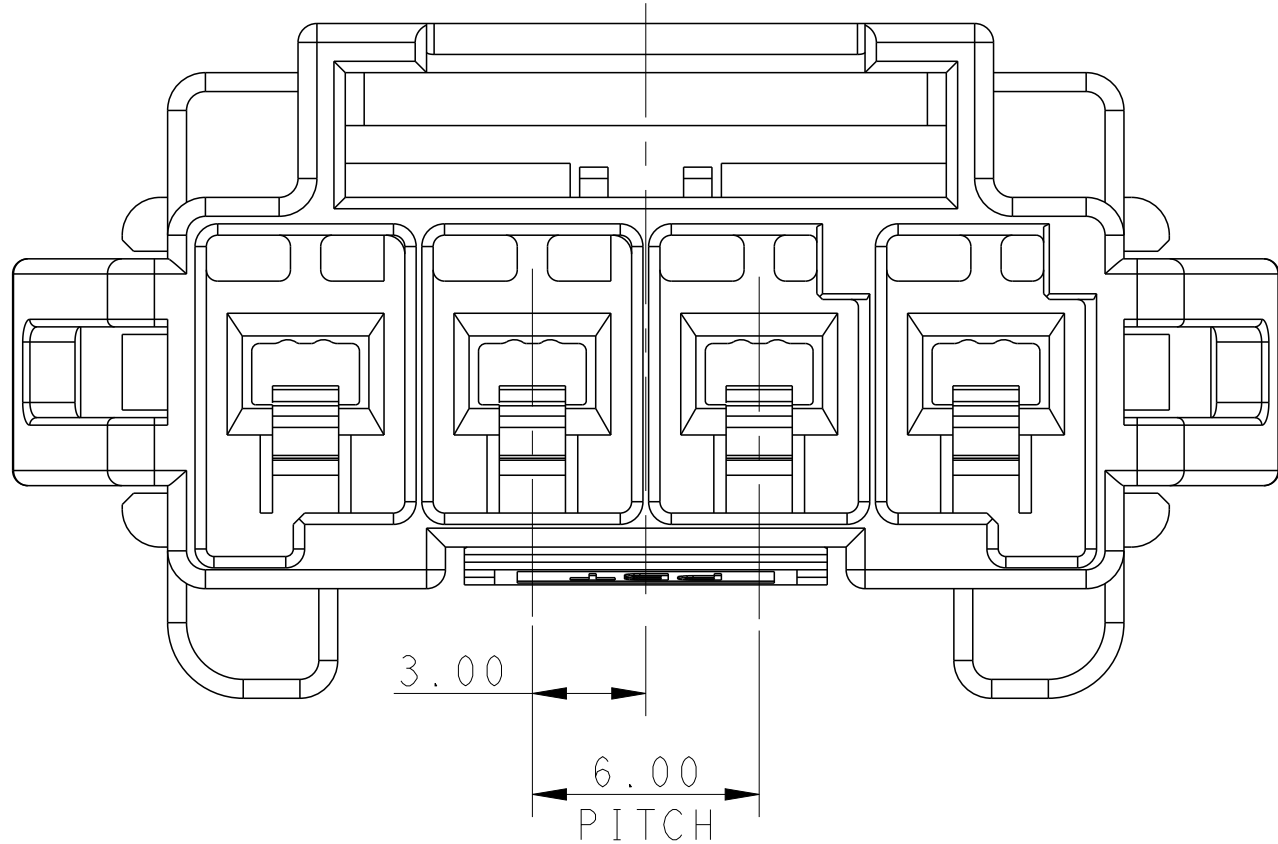

RECOMMENDED PANEL OPENING DIMENSIONS  
FOR CAP HOUSING 1\*3 POSITION  
(TOLERANCE: ±0.15mm )








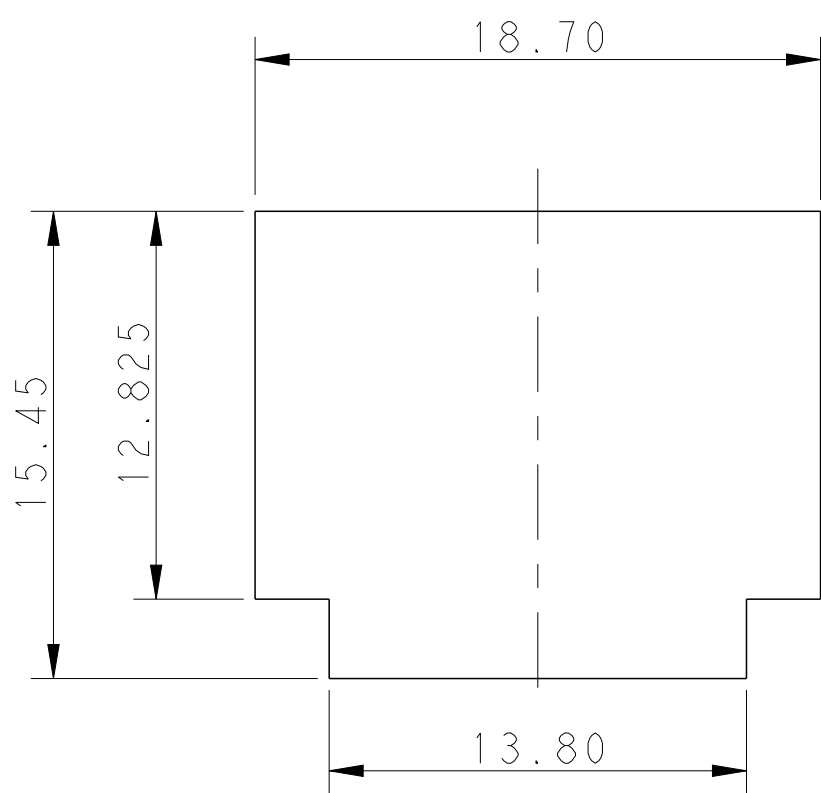


RECOMMENDED PANEL OPENING DIMENSIONS  
FOR CAP HOUSING 1\*2 POSITION  
(TOLERANCE: ±0.15mm)

| POS | Dim. A | Dim. B | Dim. C | Dim. D | Dim. E | Dim. F | Dim. G |
|-----|--------|--------|--------|--------|--------|--------|--------|
| 1*5 | 33.70  | 27.50  | 39.5   | 31.30  | 36.70  | 31.80  | 2.9    |
| 1*4 | 27.70  | 21.50  | 33.5   | 25.30  | 30.70  | 25.80  | 2.9    |
| 1*3 | 21.70  | 15.50  | 27.5   | 19.30  |        |        | 2.5    |
| 1*2 | 15.70  | 9.50   | 21.5   | 13.30  |        |        | 1.1    |

|                                        |  |                                  |                                    |  |              |       |
|----------------------------------------|--|----------------------------------|------------------------------------|--|--------------|-------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN<br>TOMMY WU<br>26MAR2013     | TE Connectivity                    |  |              |       |
| DIMENSIONS:                            |  | CHK<br>HAPYE WU<br>26MAR2013     |                                    |  |              |       |
| mm                                     |  | APVD<br>YUZHONG MAO<br>26MAR2013 | NAME                               |  |              |       |
|                                        |  | PRODUCT SPEC                     | CAP HOUSING,PANEL MOUNT,SINGLE ROW |  |              |       |
|                                        |  | 108-106118                       | POWER TRIPLE LOCK                  |  |              |       |
|                                        |  | APPLICATION SPEC                 | -                                  |  |              |       |
|                                        |  | 114-106118                       | SIZE                               |  |              |       |
| MATERIAL                               |  | WEIGHT                           | A100779C=2232263                   |  |              |       |
| 1 2                                    |  | Customer Drawing                 | SCALE                              |  | SHEET 1 OF 2 | REV C |

| REVISIONS |     |             |      |     |
|-----------|-----|-------------|------|-----|
| P         | LTR | DESCRIPTION | DATE | DWN |
| -         | -   | SEE SHEET 1 | -    | -   |

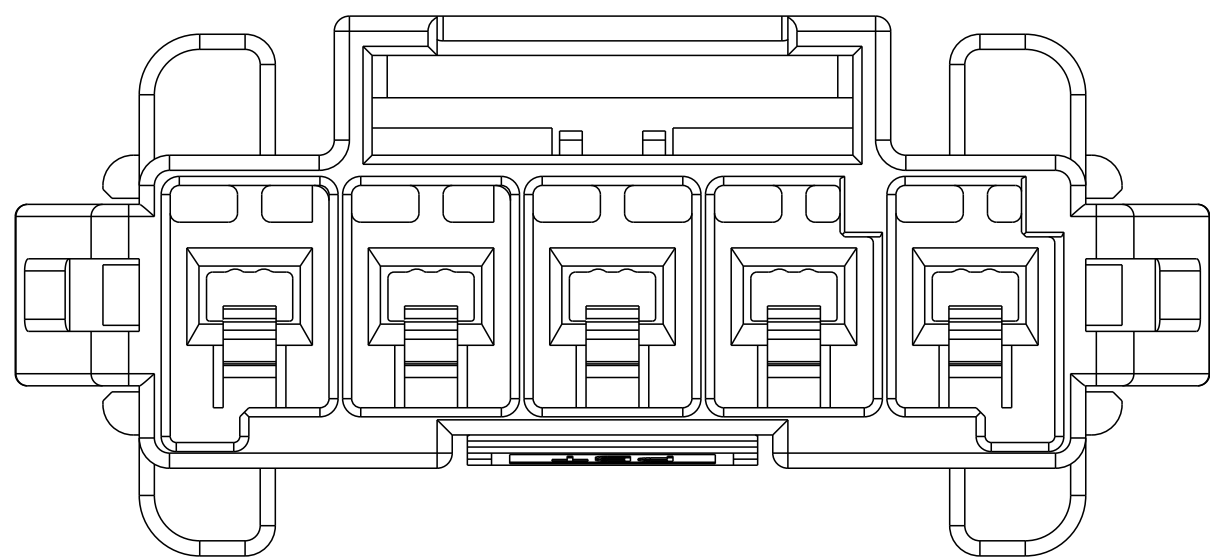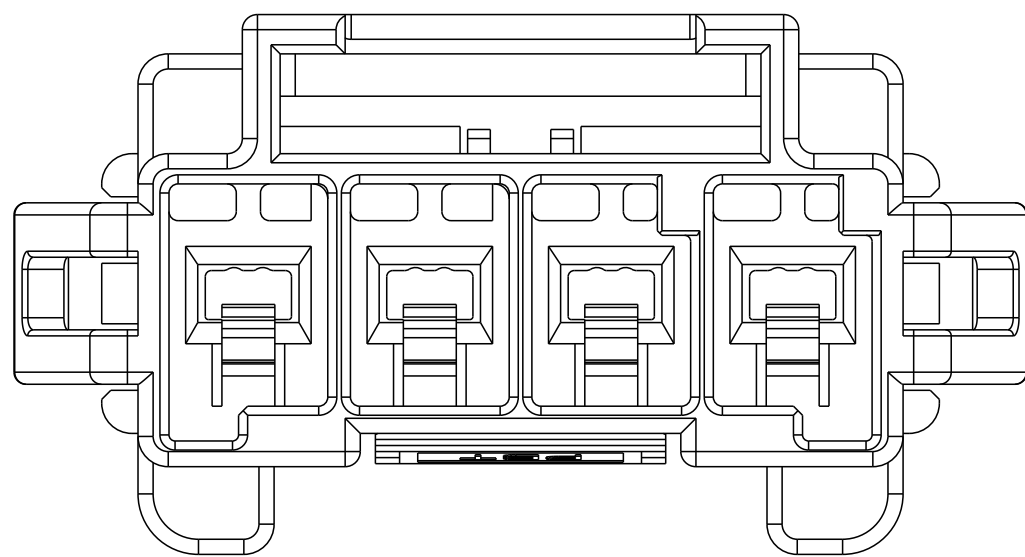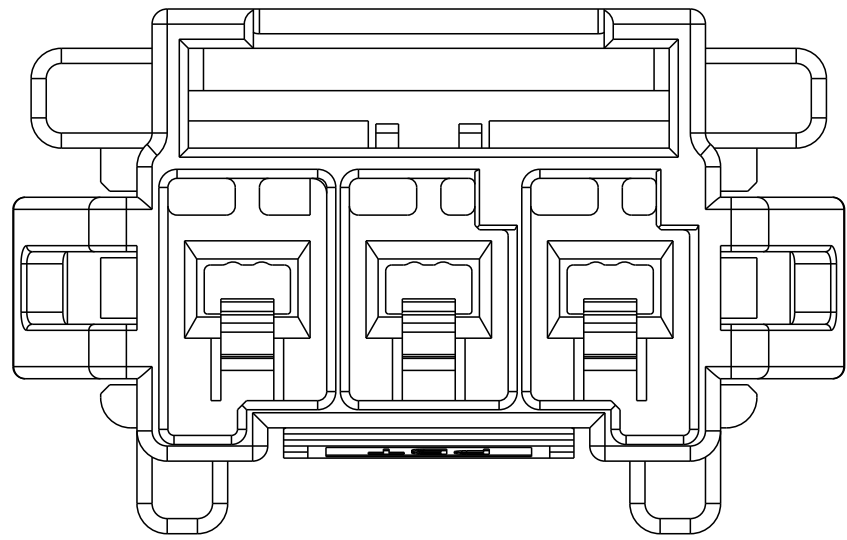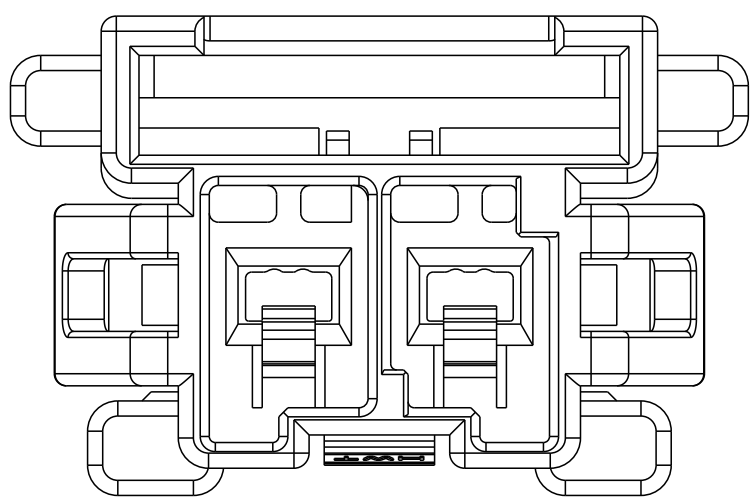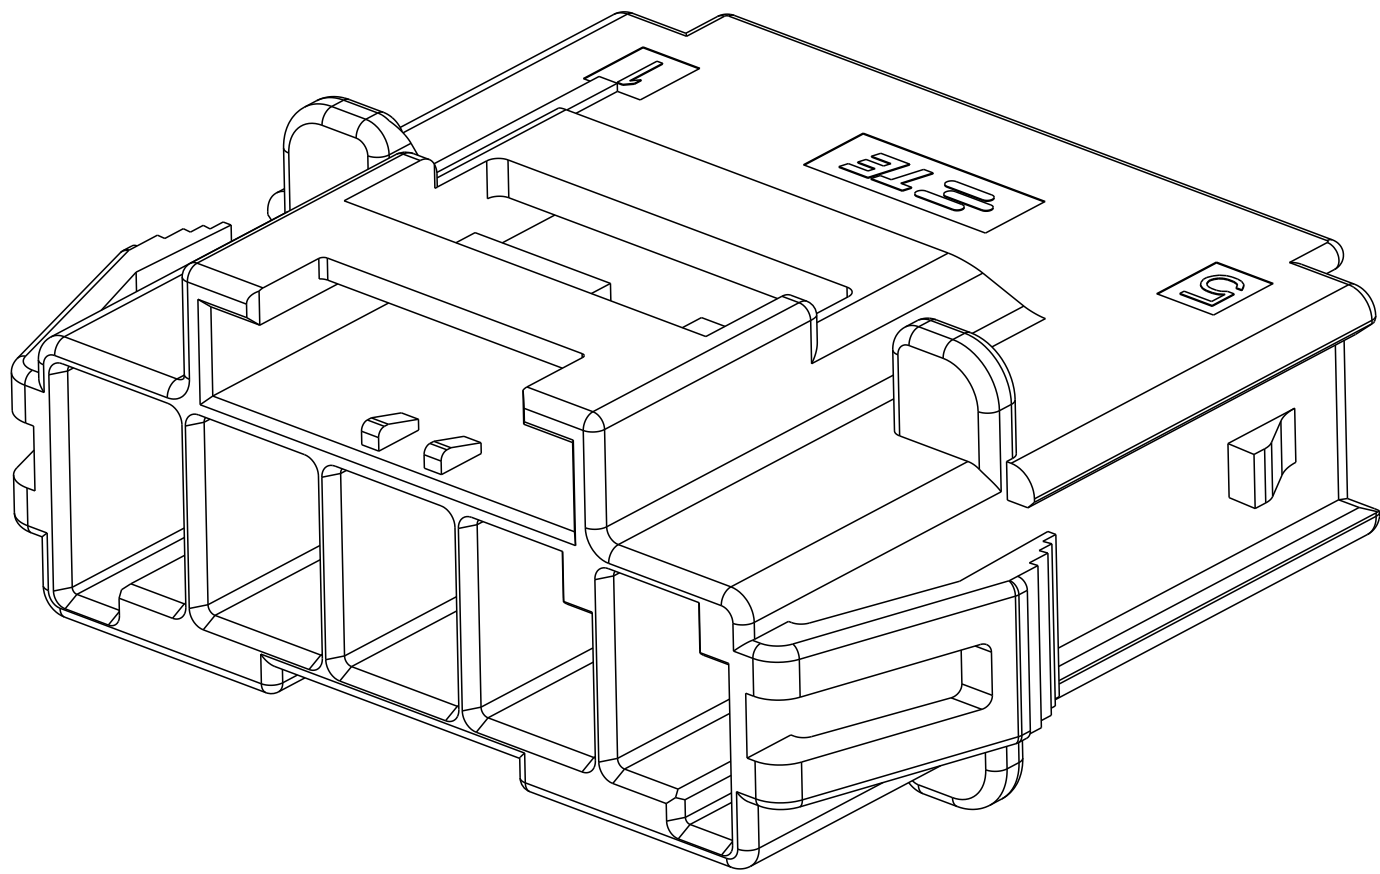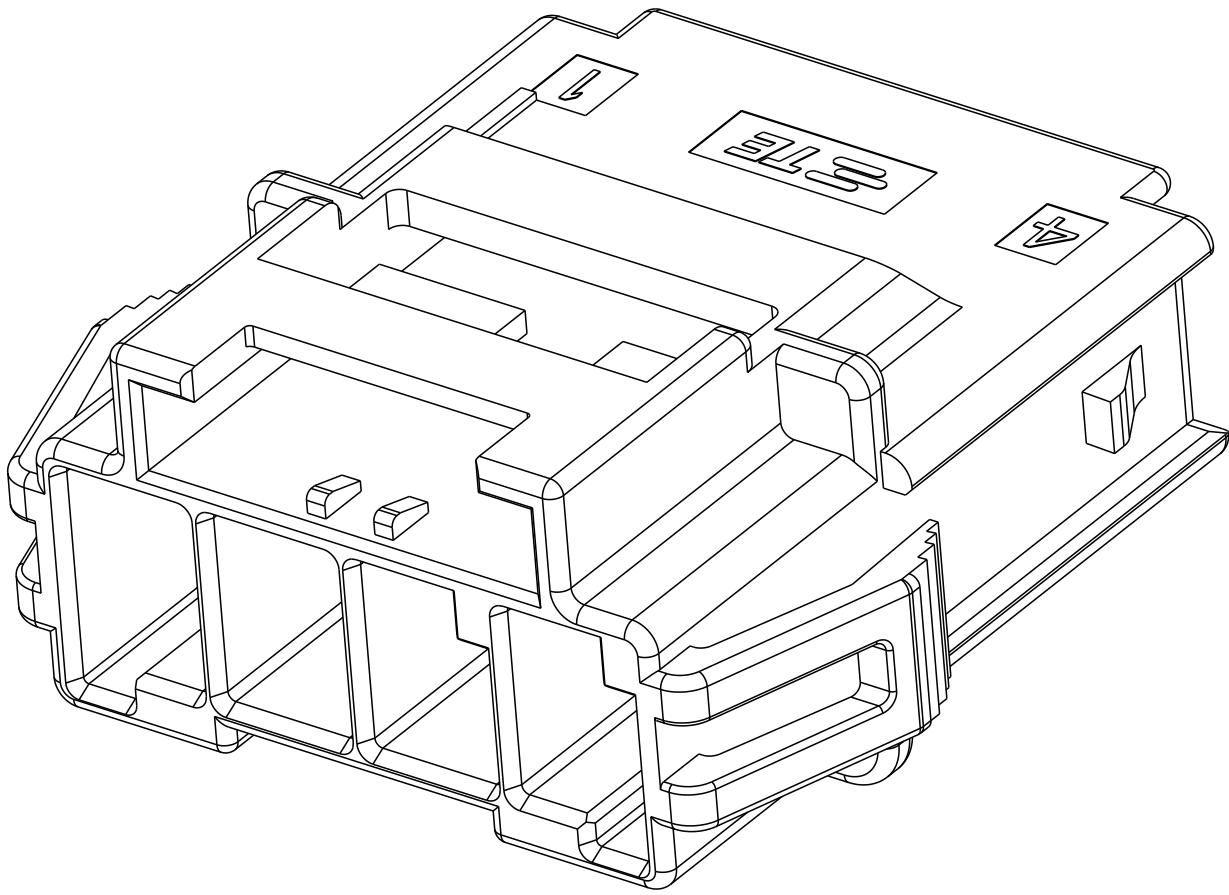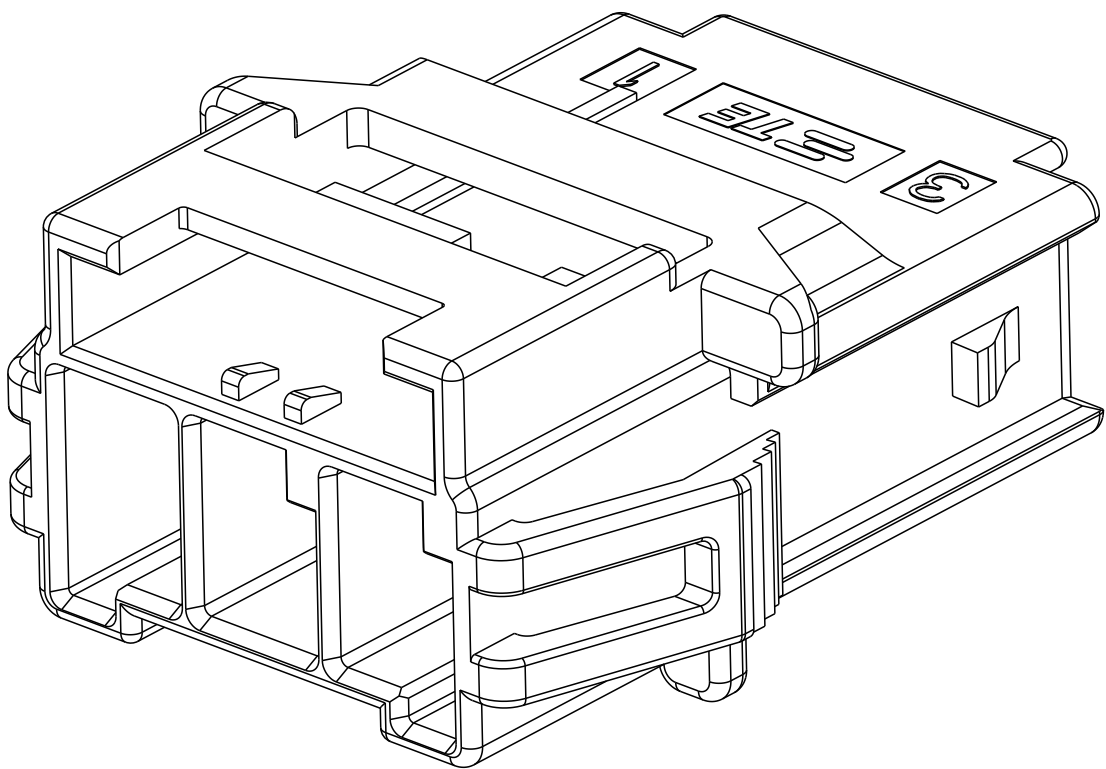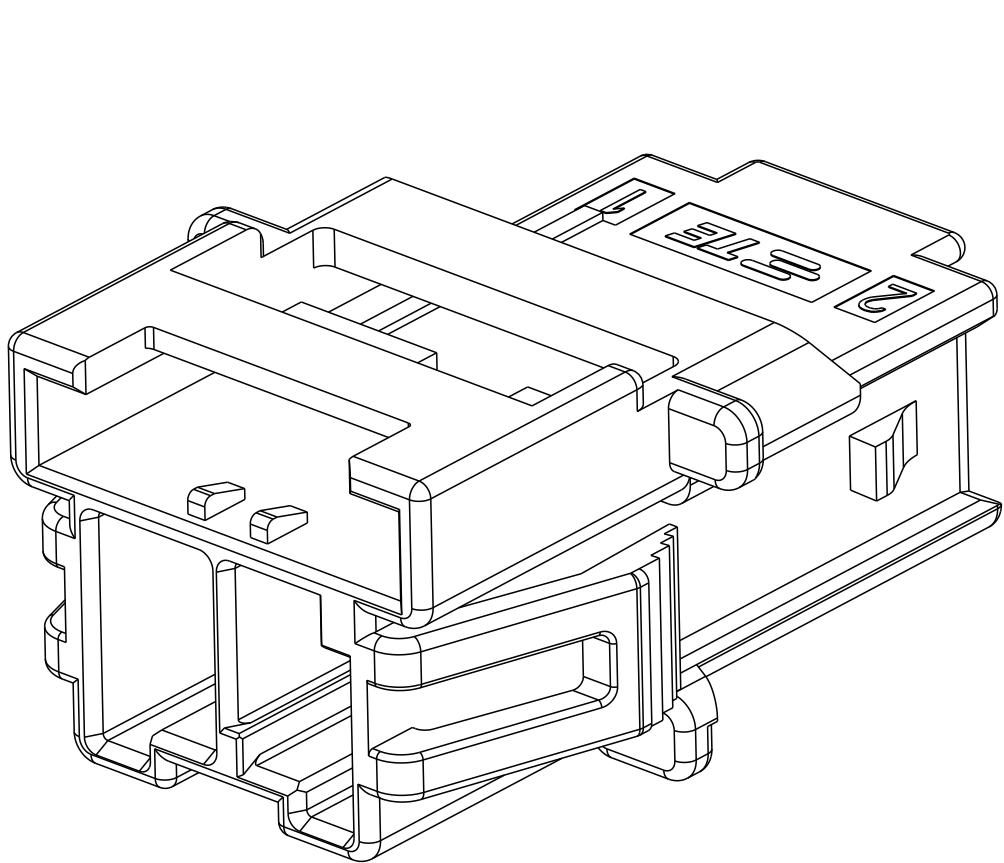


1\*2 POSITIONS


1\*3 POSITIONS

1\*4 POSITIONS


1\*5 POSITIONS

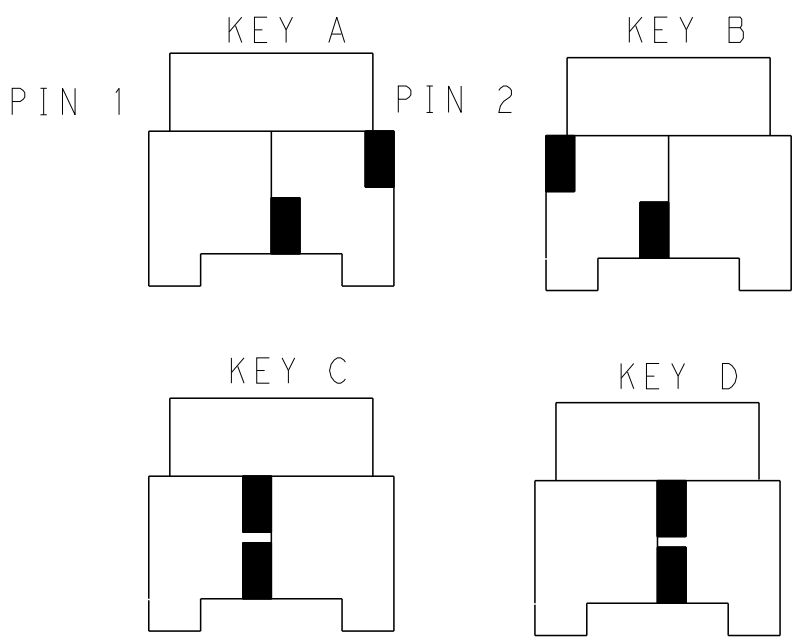


KEYING FOR 1\*2 POS.

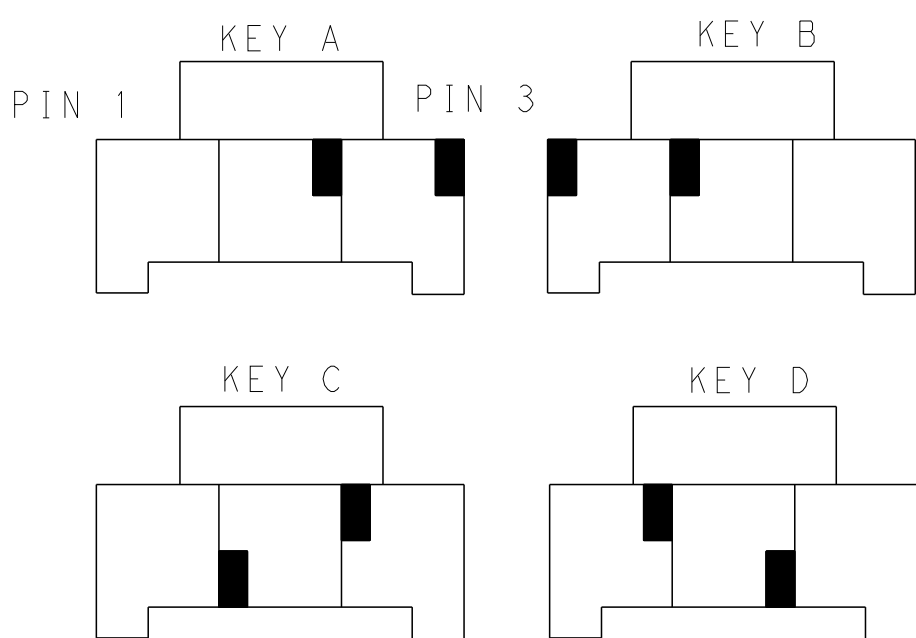

KEYING FOR 1\*3 POS.

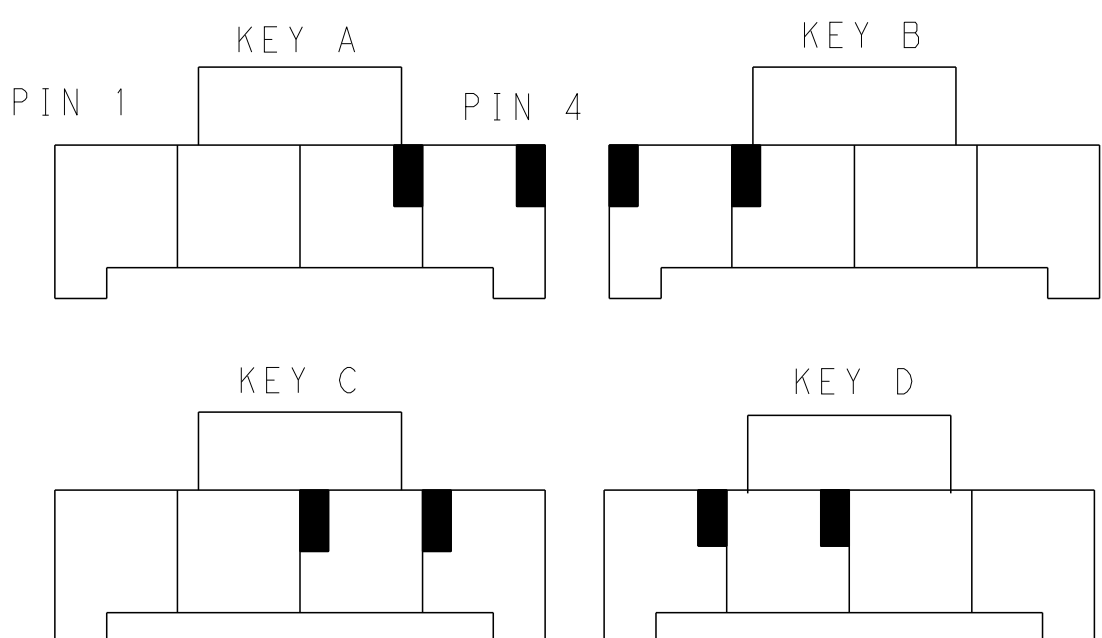

KEYING FOR 1\*4 POS.

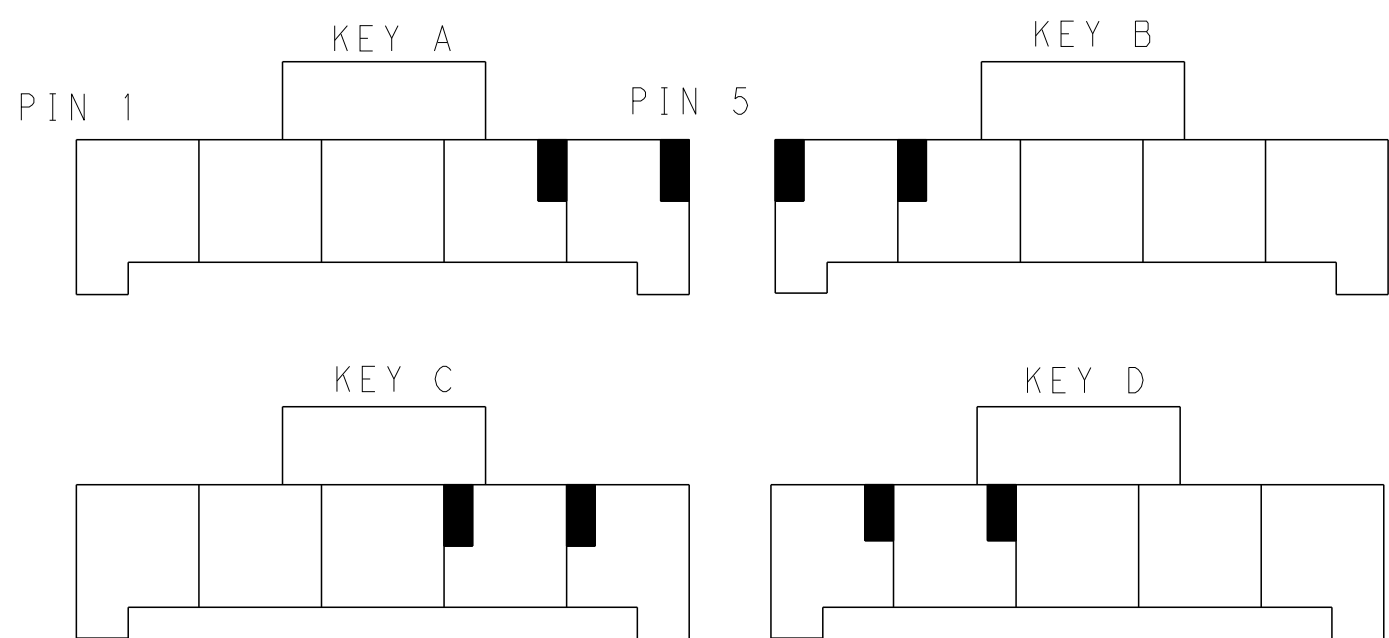

KEYING FOR 1\*5 POS.

|        |          |           |           |             |
|--------|----------|-----------|-----------|-------------|
| 1*5    | LEVEL A  | DARK GREY | KEY A     | 5-2232263-7 |
|        |          | BROWN     | KEY B     | 6-2232263-7 |
|        |          | GREEN     | KEY C     | 7-2232263-7 |
|        |          | ORANGE    | KEY D     | 8-2232263-7 |
| 1*4    | LEVEL B  | BLACK     | KEY A     | 1-2232263-3 |
|        | LEVEL A  | DARK GREY | KEY A     | 5-2232263-4 |
|        |          | BROWN     | KEY B     | 6-2232263-4 |
|        |          | GREEN     | KEY C     | 7-2232263-4 |
|        |          | ORANGE    | KEY D     | 8-2232263-4 |
|        | LEVEL B  | BLACK     | KEY A     | 1-2232263-2 |
|        | 1*3      | LEVEL A   | DARK GREY | KEY A       |
| BROWN  |          |           | KEY B     | 6-2232263-3 |
| GREEN  |          |           | KEY C     | 7-2232263-3 |
| ORANGE |          |           | KEY D     | 8-2232263-3 |
| 1*2    | LEVEL A  | DARK GREY | KEY A     | 5-2232263-2 |
|        |          | BROWN     | KEY B     | 6-2232263-2 |
|        |          | GREEN     | KEY C     | 7-2232263-2 |
|        |          | ORANGE    | KEY D     | 8-2232263-2 |
|        | LEVEL B  | NATURAL   | KEY B     | 2-2232263-1 |
|        |          | BLACK     | KEY A     | 1-2232263-1 |
| POS.   | MATERIAL | COLOR     | KEY       | P/N         |

|                                        |  |                           |                                    |  |
|----------------------------------------|--|---------------------------|------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN TOMMY WU 26MAR2013    | TE Connectivity                    |  |
|                                        |  | CHK HAPYE WU 26MAR2013    |                                    |  |
| DIMENSIONS:                            |  | APVD YUHONG MAO 26MAR2013 | NAME                               |  |
| mm                                     |  | PRODUCT SPEC              | CAP HOUSING,PANEL MOUNT,SINGLE ROW |  |
|                                        |  | 108-106118                | POWER TRIPLE LOCK                  |  |
|                                        |  | APPLICATION SPEC          |                                    |  |
|                                        |  | 114-106118                |                                    |  |
|                                        |  | WEIGHT                    |                                    |  |
| MATERIAL                               |  | Customer Drawing          |                                    |  |
|                                        |  | SCALE                     |                                    |  |
|                                        |  | SHEET 2 OF 2              |                                    |  |
|                                        |  | REV C                     |                                    |  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-2232263-7](#)