

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0877603016

Status:


Active

Overview:

Milli-Grid Connector System

Description:

2.00mm Pitch Milli-Grid Header, Right-Angle, Through Hole, 30 Circuits, 0.38µm Gold (Au) Selective Plating, Tray, Lead-Free

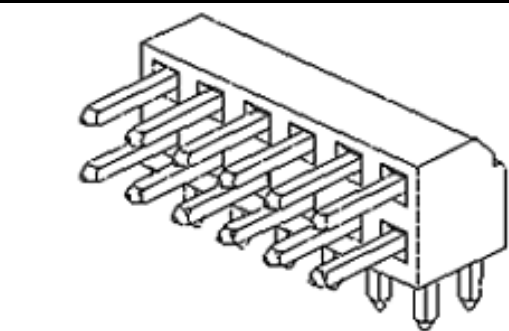

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-87761-100-001 (PDF)

Packaging Specification PK-89990-487-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification		
CSA		LR19980
UL		E29179
General		
Product Family		PCB Headers
Series		87760
Application		Board-to-Board, Signal, Wire-to-Board
Comments		Lead-Free version of 87049 series
Overview		Milli-Grid Connector System
Product Name		Milli-Grid
UPC		822348231706

Physical	
Breakaway	No
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	4.00mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.193/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	2.60mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.381µm
Plating min - Termination	1.905µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Surface Mount Compatible (SMC)	Yes

EU ELV
Not Relevant

EU RoHS	China RoHS
Compliant REACH SVHC Not Contained Per - ED/61/2018 (27 June 2018) Halogen-Free Status Not Low-Halogen	

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
87760 Series

Mates With
Milli-Grid Vertical Through Hole Receptacle [79107](#) , [78787](#) , Milli-Grid Flex-to-Board Vertical Receptacle [79108](#) , Milli-Grid Vertical Surface Mount Receptacle [79109](#) , [78788](#) , Milli-Grid Top Entry Surface Mount Receptacle [87381](#)

Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2.0A
Voltage - Maximum	125V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	014
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	265
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-89990-487-001
Product Specification	PS-87761-100-001
Sales Drawing	SD-87760-109-001

This document was generated on 10/31/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87760-3016](#)